




SUBMERSIBLE PUMPS & MOTORS

QF SERIES

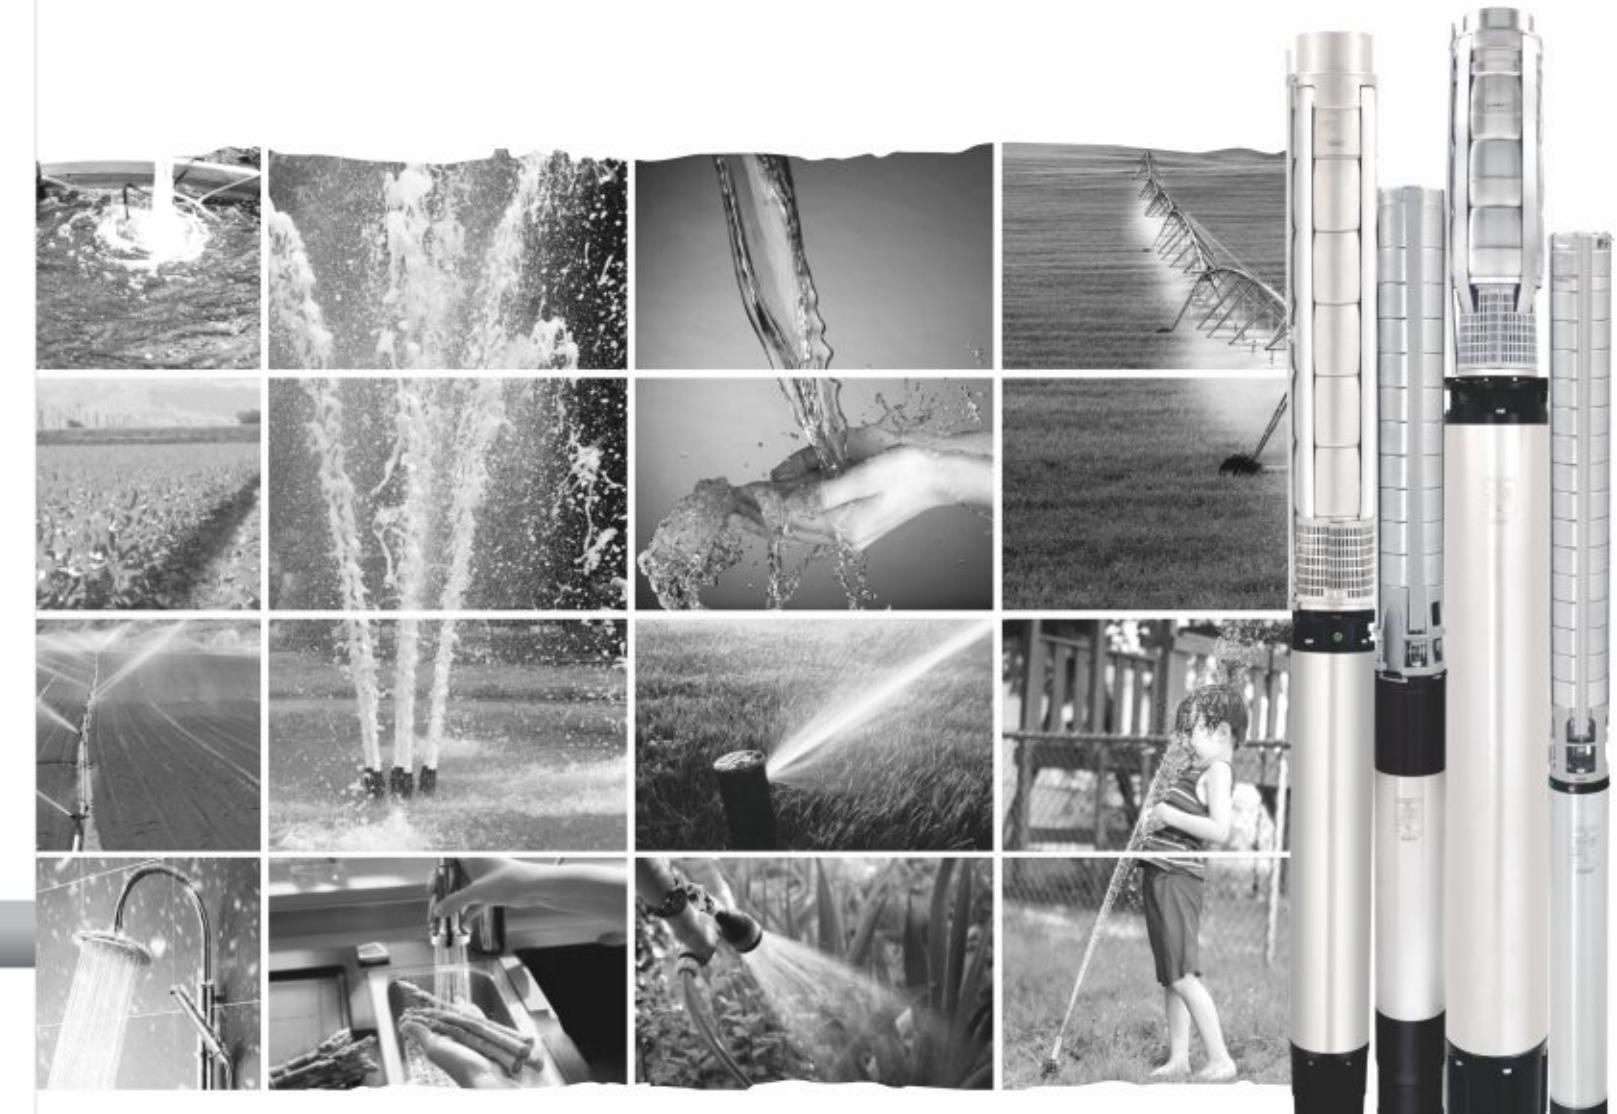

SAP No. 2900000115

VC - 2176

Aug/2015-16/LG/500



India : Toll Free No. 1800 103 5555 Other Countries : +91-7292 410500


SHAKTI PUMPS (I) LTD.

Sector - 3, Pithampur - 454774, Dist. - Dhar, (M.P.) - INDIA
Fax: +91-7292 410519, E-mail: info@shaktipumps.com, sales@shaktipumps.com,
Visit us at : www.shaktipumps.com

CONTENT	PAGE NO.	CONTENT	PAGE NO.																																																																																																
GENERAL DATA																																																																																																			
Performance Range.....	2	V14 PUMPS																																																																																																	
Pump Range.....	3	SSP General Data.....	98																																																																																																
Motor Range.....	3	Pump Range.....	99																																																																																																
Applications.....	4	Motor Range.....	99																																																																																																
Type Key.....	4	Type Key.....	99																																																																																																
Pumped Liquids.....	4	Pumped Liquids.....	99																																																																																																
Operating Conditions.....	4	Operating Conditions.....	99																																																																																																
Curve Conditions.....	4	Features & Benefits.....	100																																																																																																
SUBMERSIBLE PUMPS																																																																																																			
Features and Benefits.....	5-7	Performance Range	101																																																																																																
Material Specification.....	8	Material Specification & Sectional view of SSP 270.....	102																																																																																																
PERFORMANCE CURVES & TECHNICAL DATA OF SUBMERSIBLE PUMPS																																																																																																			
Q3	20-21	Performance Curve & Technical Data																																																																																																	
QF1.....	22-23	QF2.....	24-25	QF5.....	26-27	QF6.....	28-29	QF12.....	30-31	QF20.....	32-33	QF25.....	34-35	QF10.....	36-39	QF15.....	40-43	QF30.....	44-49	QF50.....	50-55	QF75.....	56-61	QF100.....	62-67	QF125.....	68-73	QF160.....	74-79	QF210.....	80-85	QF270.....	86-91	QF360.....	92-97	SUBMERSIBLE MOTORS				Features and Benefits.....	9-10	Single Phase Performance Data 50 Hz		Material Specification & Sectional View				3" MOTOR	11	4" Premium 100/101.....	115	4" PREMIUM 100, 4" PREMIUM 101	12-13	Three Phase Performance Data 50 Hz		4" MCIP 100, 4" MCIP 101.....	14-15	4" Premium 100/101.....	116	6" MTSF.....	16	MTSF 6" Rewindable Motors		6" SML.....	17	Performance Data 50 Hz.....	117	8" MTSF.....	18	MTSF 8" Rewindable Motors		10" MTSF.....	19	Performance Data 50 Hz.....	118	TABLE OF HEAD LOSSES				Connecting Pieces.....	121	SML 6" Rewindable Motors		Head Losses in Ordinary Water Pipes.....	122	Performance Data 50 Hz.....	119	Head Losses in Plastic Pipes.....	123	MTSF 10" Rewindable Motors		CABLE SIZING				Submersible pumps SP A, SP.....	124-125	Performance Data 50 Hz.....	120
QF2.....	24-25	QF5.....	26-27	QF6.....	28-29	QF12.....	30-31	QF20.....	32-33	QF25.....	34-35	QF10.....	36-39	QF15.....	40-43	QF30.....	44-49	QF50.....	50-55	QF75.....	56-61	QF100.....	62-67	QF125.....	68-73	QF160.....	74-79	QF210.....	80-85	QF270.....	86-91	QF360.....	92-97	SUBMERSIBLE MOTORS				Features and Benefits.....	9-10	Single Phase Performance Data 50 Hz		Material Specification & Sectional View				3" MOTOR	11	4" Premium 100/101.....	115	4" PREMIUM 100, 4" PREMIUM 101	12-13	Three Phase Performance Data 50 Hz		4" MCIP 100, 4" MCIP 101.....	14-15	4" Premium 100/101.....	116	6" MTSF.....	16	MTSF 6" Rewindable Motors		6" SML.....	17	Performance Data 50 Hz.....	117	8" MTSF.....	18	MTSF 8" Rewindable Motors		10" MTSF.....	19	Performance Data 50 Hz.....	118	TABLE OF HEAD LOSSES				Connecting Pieces.....	121	SML 6" Rewindable Motors		Head Losses in Ordinary Water Pipes.....	122	Performance Data 50 Hz.....	119	Head Losses in Plastic Pipes.....	123	MTSF 10" Rewindable Motors		CABLE SIZING				Submersible pumps SP A, SP.....	124-125	Performance Data 50 Hz.....	120		
QF5.....	26-27	QF6.....	28-29	QF12.....	30-31	QF20.....	32-33	QF25.....	34-35	QF10.....	36-39	QF15.....	40-43	QF30.....	44-49	QF50.....	50-55	QF75.....	56-61	QF100.....	62-67	QF125.....	68-73	QF160.....	74-79	QF210.....	80-85	QF270.....	86-91	QF360.....	92-97	SUBMERSIBLE MOTORS				Features and Benefits.....	9-10	Single Phase Performance Data 50 Hz		Material Specification & Sectional View				3" MOTOR	11	4" Premium 100/101.....	115	4" PREMIUM 100, 4" PREMIUM 101	12-13	Three Phase Performance Data 50 Hz		4" MCIP 100, 4" MCIP 101.....	14-15	4" Premium 100/101.....	116	6" MTSF.....	16	MTSF 6" Rewindable Motors		6" SML.....	17	Performance Data 50 Hz.....	117	8" MTSF.....	18	MTSF 8" Rewindable Motors		10" MTSF.....	19	Performance Data 50 Hz.....	118	TABLE OF HEAD LOSSES				Connecting Pieces.....	121	SML 6" Rewindable Motors		Head Losses in Ordinary Water Pipes.....	122	Performance Data 50 Hz.....	119	Head Losses in Plastic Pipes.....	123	MTSF 10" Rewindable Motors		CABLE SIZING				Submersible pumps SP A, SP.....	124-125	Performance Data 50 Hz.....	120				
QF6.....	28-29	QF12.....	30-31	QF20.....	32-33	QF25.....	34-35	QF10.....	36-39	QF15.....	40-43	QF30.....	44-49	QF50.....	50-55	QF75.....	56-61	QF100.....	62-67	QF125.....	68-73	QF160.....	74-79	QF210.....	80-85	QF270.....	86-91	QF360.....	92-97	SUBMERSIBLE MOTORS				Features and Benefits.....	9-10	Single Phase Performance Data 50 Hz		Material Specification & Sectional View				3" MOTOR	11	4" Premium 100/101.....	115	4" PREMIUM 100, 4" PREMIUM 101	12-13	Three Phase Performance Data 50 Hz		4" MCIP 100, 4" MCIP 101.....	14-15	4" Premium 100/101.....	116	6" MTSF.....	16	MTSF 6" Rewindable Motors		6" SML.....	17	Performance Data 50 Hz.....	117	8" MTSF.....	18	MTSF 8" Rewindable Motors		10" MTSF.....	19	Performance Data 50 Hz.....	118	TABLE OF HEAD LOSSES				Connecting Pieces.....	121	SML 6" Rewindable Motors		Head Losses in Ordinary Water Pipes.....	122	Performance Data 50 Hz.....	119	Head Losses in Plastic Pipes.....	123	MTSF 10" Rewindable Motors		CABLE SIZING				Submersible pumps SP A, SP.....	124-125	Performance Data 50 Hz.....	120						
QF12.....	30-31	QF20.....	32-33	QF25.....	34-35	QF10.....	36-39	QF15.....	40-43	QF30.....	44-49	QF50.....	50-55	QF75.....	56-61	QF100.....	62-67	QF125.....	68-73	QF160.....	74-79	QF210.....	80-85	QF270.....	86-91	QF360.....	92-97	SUBMERSIBLE MOTORS				Features and Benefits.....	9-10	Single Phase Performance Data 50 Hz		Material Specification & Sectional View				3" MOTOR	11	4" Premium 100/101.....	115	4" PREMIUM 100, 4" PREMIUM 101	12-13	Three Phase Performance Data 50 Hz		4" MCIP 100, 4" MCIP 101.....	14-15	4" Premium 100/101.....	116	6" MTSF.....	16	MTSF 6" Rewindable Motors		6" SML.....	17	Performance Data 50 Hz.....	117	8" MTSF.....	18	MTSF 8" Rewindable Motors		10" MTSF.....	19	Performance Data 50 Hz.....	118	TABLE OF HEAD LOSSES				Connecting Pieces.....	121	SML 6" Rewindable Motors		Head Losses in Ordinary Water Pipes.....	122	Performance Data 50 Hz.....	119	Head Losses in Plastic Pipes.....	123	MTSF 10" Rewindable Motors		CABLE SIZING				Submersible pumps SP A, SP.....	124-125	Performance Data 50 Hz.....	120								
QF20.....	32-33	QF25.....	34-35	QF10.....	36-39	QF15.....	40-43	QF30.....	44-49	QF50.....	50-55	QF75.....	56-61	QF100.....	62-67	QF125.....	68-73	QF160.....	74-79	QF210.....	80-85	QF270.....	86-91	QF360.....	92-97	SUBMERSIBLE MOTORS				Features and Benefits.....	9-10	Single Phase Performance Data 50 Hz		Material Specification & Sectional View				3" MOTOR	11	4" Premium 100/101.....	115	4" PREMIUM 100, 4" PREMIUM 101	12-13	Three Phase Performance Data 50 Hz		4" MCIP 100, 4" MCIP 101.....	14-15	4" Premium 100/101.....	116	6" MTSF.....	16	MTSF 6" Rewindable Motors		6" SML.....	17	Performance Data 50 Hz.....	117	8" MTSF.....	18	MTSF 8" Rewindable Motors		10" MTSF.....	19	Performance Data 50 Hz.....	118	TABLE OF HEAD LOSSES				Connecting Pieces.....	121	SML 6" Rewindable Motors		Head Losses in Ordinary Water Pipes.....	122	Performance Data 50 Hz.....	119	Head Losses in Plastic Pipes.....	123	MTSF 10" Rewindable Motors		CABLE SIZING				Submersible pumps SP A, SP.....	124-125	Performance Data 50 Hz.....	120										
QF25.....	34-35	QF10.....	36-39	QF15.....	40-43	QF30.....	44-49	QF50.....	50-55	QF75.....	56-61	QF100.....	62-67	QF125.....	68-73	QF160.....	74-79	QF210.....	80-85	QF270.....	86-91	QF360.....	92-97	SUBMERSIBLE MOTORS				Features and Benefits.....	9-10	Single Phase Performance Data 50 Hz		Material Specification & Sectional View				3" MOTOR	11	4" Premium 100/101.....	115	4" PREMIUM 100, 4" PREMIUM 101	12-13	Three Phase Performance Data 50 Hz		4" MCIP 100, 4" MCIP 101.....	14-15	4" Premium 100/101.....	116	6" MTSF.....	16	MTSF 6" Rewindable Motors		6" SML.....	17	Performance Data 50 Hz.....	117	8" MTSF.....	18	MTSF 8" Rewindable Motors		10" MTSF.....	19	Performance Data 50 Hz.....	118	TABLE OF HEAD LOSSES				Connecting Pieces.....	121	SML 6" Rewindable Motors		Head Losses in Ordinary Water Pipes.....	122	Performance Data 50 Hz.....	119	Head Losses in Plastic Pipes.....	123	MTSF 10" Rewindable Motors		CABLE SIZING				Submersible pumps SP A, SP.....	124-125	Performance Data 50 Hz.....	120												
QF10.....	36-39	QF15.....	40-43	QF30.....	44-49	QF50.....	50-55	QF75.....	56-61	QF100.....	62-67	QF125.....	68-73	QF160.....	74-79	QF210.....	80-85	QF270.....	86-91	QF360.....	92-97	SUBMERSIBLE MOTORS				Features and Benefits.....	9-10	Single Phase Performance Data 50 Hz		Material Specification & Sectional View				3" MOTOR	11	4" Premium 100/101.....	115	4" PREMIUM 100, 4" PREMIUM 101	12-13	Three Phase Performance Data 50 Hz		4" MCIP 100, 4" MCIP 101.....	14-15	4" Premium 100/101.....	116	6" MTSF.....	16	MTSF 6" Rewindable Motors		6" SML.....	17	Performance Data 50 Hz.....	117	8" MTSF.....	18	MTSF 8" Rewindable Motors		10" MTSF.....	19	Performance Data 50 Hz.....	118	TABLE OF HEAD LOSSES				Connecting Pieces.....	121	SML 6" Rewindable Motors		Head Losses in Ordinary Water Pipes.....	122	Performance Data 50 Hz.....	119	Head Losses in Plastic Pipes.....	123	MTSF 10" Rewindable Motors		CABLE SIZING				Submersible pumps SP A, SP.....	124-125	Performance Data 50 Hz.....	120														
QF15.....	40-43	QF30.....	44-49	QF50.....	50-55	QF75.....	56-61	QF100.....	62-67	QF125.....	68-73	QF160.....	74-79	QF210.....	80-85	QF270.....	86-91	QF360.....	92-97	SUBMERSIBLE MOTORS				Features and Benefits.....	9-10	Single Phase Performance Data 50 Hz		Material Specification & Sectional View				3" MOTOR	11	4" Premium 100/101.....	115	4" PREMIUM 100, 4" PREMIUM 101	12-13	Three Phase Performance Data 50 Hz		4" MCIP 100, 4" MCIP 101.....	14-15	4" Premium 100/101.....	116	6" MTSF.....	16	MTSF 6" Rewindable Motors		6" SML.....	17	Performance Data 50 Hz.....	117	8" MTSF.....	18	MTSF 8" Rewindable Motors		10" MTSF.....	19	Performance Data 50 Hz.....	118	TABLE OF HEAD LOSSES				Connecting Pieces.....	121	SML 6" Rewindable Motors		Head Losses in Ordinary Water Pipes.....	122	Performance Data 50 Hz.....	119	Head Losses in Plastic Pipes.....	123	MTSF 10" Rewindable Motors		CABLE SIZING				Submersible pumps SP A, SP.....	124-125	Performance Data 50 Hz.....	120																
QF30.....	44-49	QF50.....	50-55	QF75.....	56-61	QF100.....	62-67	QF125.....	68-73	QF160.....	74-79	QF210.....	80-85	QF270.....	86-91	QF360.....	92-97	SUBMERSIBLE MOTORS				Features and Benefits.....	9-10	Single Phase Performance Data 50 Hz		Material Specification & Sectional View				3" MOTOR	11	4" Premium 100/101.....	115	4" PREMIUM 100, 4" PREMIUM 101	12-13	Three Phase Performance Data 50 Hz		4" MCIP 100, 4" MCIP 101.....	14-15	4" Premium 100/101.....	116	6" MTSF.....	16	MTSF 6" Rewindable Motors		6" SML.....	17	Performance Data 50 Hz.....	117	8" MTSF.....	18	MTSF 8" Rewindable Motors		10" MTSF.....	19	Performance Data 50 Hz.....	118	TABLE OF HEAD LOSSES				Connecting Pieces.....	121	SML 6" Rewindable Motors		Head Losses in Ordinary Water Pipes.....	122	Performance Data 50 Hz.....	119	Head Losses in Plastic Pipes.....	123	MTSF 10" Rewindable Motors		CABLE SIZING				Submersible pumps SP A, SP.....	124-125	Performance Data 50 Hz.....	120																		
QF50.....	50-55	QF75.....	56-61	QF100.....	62-67	QF125.....	68-73	QF160.....	74-79	QF210.....	80-85	QF270.....	86-91	QF360.....	92-97	SUBMERSIBLE MOTORS				Features and Benefits.....	9-10	Single Phase Performance Data 50 Hz		Material Specification & Sectional View				3" MOTOR	11	4" Premium 100/101.....	115	4" PREMIUM 100, 4" PREMIUM 101	12-13	Three Phase Performance Data 50 Hz		4" MCIP 100, 4" MCIP 101.....	14-15	4" Premium 100/101.....	116	6" MTSF.....	16	MTSF 6" Rewindable Motors		6" SML.....	17	Performance Data 50 Hz.....	117	8" MTSF.....	18	MTSF 8" Rewindable Motors		10" MTSF.....	19	Performance Data 50 Hz.....	118	TABLE OF HEAD LOSSES				Connecting Pieces.....	121	SML 6" Rewindable Motors		Head Losses in Ordinary Water Pipes.....	122	Performance Data 50 Hz.....	119	Head Losses in Plastic Pipes.....	123	MTSF 10" Rewindable Motors		CABLE SIZING				Submersible pumps SP A, SP.....	124-125	Performance Data 50 Hz.....	120																				
QF75.....	56-61	QF100.....	62-67	QF125.....	68-73	QF160.....	74-79	QF210.....	80-85	QF270.....	86-91	QF360.....	92-97	SUBMERSIBLE MOTORS				Features and Benefits.....	9-10	Single Phase Performance Data 50 Hz		Material Specification & Sectional View				3" MOTOR	11	4" Premium 100/101.....	115	4" PREMIUM 100, 4" PREMIUM 101	12-13	Three Phase Performance Data 50 Hz		4" MCIP 100, 4" MCIP 101.....	14-15	4" Premium 100/101.....	116	6" MTSF.....	16	MTSF 6" Rewindable Motors		6" SML.....	17	Performance Data 50 Hz.....	117	8" MTSF.....	18	MTSF 8" Rewindable Motors		10" MTSF.....	19	Performance Data 50 Hz.....	118	TABLE OF HEAD LOSSES				Connecting Pieces.....	121	SML 6" Rewindable Motors		Head Losses in Ordinary Water Pipes.....	122	Performance Data 50 Hz.....	119	Head Losses in Plastic Pipes.....	123	MTSF 10" Rewindable Motors		CABLE SIZING				Submersible pumps SP A, SP.....	124-125	Performance Data 50 Hz.....	120																						
QF100.....	62-67	QF125.....	68-73	QF160.....	74-79	QF210.....	80-85	QF270.....	86-91	QF360.....	92-97	SUBMERSIBLE MOTORS				Features and Benefits.....	9-10	Single Phase Performance Data 50 Hz		Material Specification & Sectional View				3" MOTOR	11	4" Premium 100/101.....	115	4" PREMIUM 100, 4" PREMIUM 101	12-13	Three Phase Performance Data 50 Hz		4" MCIP 100, 4" MCIP 101.....	14-15	4" Premium 100/101.....	116	6" MTSF.....	16	MTSF 6" Rewindable Motors		6" SML.....	17	Performance Data 50 Hz.....	117	8" MTSF.....	18	MTSF 8" Rewindable Motors		10" MTSF.....	19	Performance Data 50 Hz.....	118	TABLE OF HEAD LOSSES				Connecting Pieces.....	121	SML 6" Rewindable Motors		Head Losses in Ordinary Water Pipes.....	122	Performance Data 50 Hz.....	119	Head Losses in Plastic Pipes.....	123	MTSF 10" Rewindable Motors		CABLE SIZING				Submersible pumps SP A, SP.....	124-125	Performance Data 50 Hz.....	120																								
QF125.....	68-73	QF160.....	74-79	QF210.....	80-85	QF270.....	86-91	QF360.....	92-97	SUBMERSIBLE MOTORS				Features and Benefits.....	9-10	Single Phase Performance Data 50 Hz		Material Specification & Sectional View				3" MOTOR	11	4" Premium 100/101.....	115	4" PREMIUM 100, 4" PREMIUM 101	12-13	Three Phase Performance Data 50 Hz		4" MCIP 100, 4" MCIP 101.....	14-15	4" Premium 100/101.....	116	6" MTSF.....	16	MTSF 6" Rewindable Motors		6" SML.....	17	Performance Data 50 Hz.....	117	8" MTSF.....	18	MTSF 8" Rewindable Motors		10" MTSF.....	19	Performance Data 50 Hz.....	118	TABLE OF HEAD LOSSES				Connecting Pieces.....	121	SML 6" Rewindable Motors		Head Losses in Ordinary Water Pipes.....	122	Performance Data 50 Hz.....	119	Head Losses in Plastic Pipes.....	123	MTSF 10" Rewindable Motors		CABLE SIZING				Submersible pumps SP A, SP.....	124-125	Performance Data 50 Hz.....	120																										
QF160.....	74-79	QF210.....	80-85	QF270.....	86-91	QF360.....	92-97	SUBMERSIBLE MOTORS				Features and Benefits.....	9-10	Single Phase Performance Data 50 Hz		Material Specification & Sectional View				3" MOTOR	11	4" Premium 100/101.....	115	4" PREMIUM 100, 4" PREMIUM 101	12-13	Three Phase Performance Data 50 Hz		4" MCIP 100, 4" MCIP 101.....	14-15	4" Premium 100/101.....	116	6" MTSF.....	16	MTSF 6" Rewindable Motors		6" SML.....	17	Performance Data 50 Hz.....	117	8" MTSF.....	18	MTSF 8" Rewindable Motors		10" MTSF.....	19	Performance Data 50 Hz.....	118	TABLE OF HEAD LOSSES				Connecting Pieces.....	121	SML 6" Rewindable Motors		Head Losses in Ordinary Water Pipes.....	122	Performance Data 50 Hz.....	119	Head Losses in Plastic Pipes.....	123	MTSF 10" Rewindable Motors		CABLE SIZING				Submersible pumps SP A, SP.....	124-125	Performance Data 50 Hz.....	120																												
QF210.....	80-85	QF270.....	86-91	QF360.....	92-97	SUBMERSIBLE MOTORS				Features and Benefits.....	9-10	Single Phase Performance Data 50 Hz		Material Specification & Sectional View				3" MOTOR	11	4" Premium 100/101.....	115	4" PREMIUM 100, 4" PREMIUM 101	12-13	Three Phase Performance Data 50 Hz		4" MCIP 100, 4" MCIP 101.....	14-15	4" Premium 100/101.....	116	6" MTSF.....	16	MTSF 6" Rewindable Motors		6" SML.....	17	Performance Data 50 Hz.....	117	8" MTSF.....	18	MTSF 8" Rewindable Motors		10" MTSF.....	19	Performance Data 50 Hz.....	118	TABLE OF HEAD LOSSES				Connecting Pieces.....	121	SML 6" Rewindable Motors		Head Losses in Ordinary Water Pipes.....	122	Performance Data 50 Hz.....	119	Head Losses in Plastic Pipes.....	123	MTSF 10" Rewindable Motors		CABLE SIZING				Submersible pumps SP A, SP.....	124-125	Performance Data 50 Hz.....	120																														
QF270.....	86-91	QF360.....	92-97	SUBMERSIBLE MOTORS				Features and Benefits.....	9-10	Single Phase Performance Data 50 Hz		Material Specification & Sectional View				3" MOTOR	11	4" Premium 100/101.....	115	4" PREMIUM 100, 4" PREMIUM 101	12-13	Three Phase Performance Data 50 Hz		4" MCIP 100, 4" MCIP 101.....	14-15	4" Premium 100/101.....	116	6" MTSF.....	16	MTSF 6" Rewindable Motors		6" SML.....	17	Performance Data 50 Hz.....	117	8" MTSF.....	18	MTSF 8" Rewindable Motors		10" MTSF.....	19	Performance Data 50 Hz.....	118	TABLE OF HEAD LOSSES				Connecting Pieces.....	121	SML 6" Rewindable Motors		Head Losses in Ordinary Water Pipes.....	122	Performance Data 50 Hz.....	119	Head Losses in Plastic Pipes.....	123	MTSF 10" Rewindable Motors		CABLE SIZING				Submersible pumps SP A, SP.....	124-125	Performance Data 50 Hz.....	120																																
QF360.....	92-97																																																																																																		
SUBMERSIBLE MOTORS																																																																																																			
Features and Benefits.....	9-10	Single Phase Performance Data 50 Hz																																																																																																	
Material Specification & Sectional View																																																																																																			
3" MOTOR	11	4" Premium 100/101.....	115																																																																																																
4" PREMIUM 100, 4" PREMIUM 101	12-13	Three Phase Performance Data 50 Hz																																																																																																	
4" MCIP 100, 4" MCIP 101.....	14-15	4" Premium 100/101.....	116																																																																																																
6" MTSF.....	16	MTSF 6" Rewindable Motors																																																																																																	
6" SML.....	17	Performance Data 50 Hz.....	117																																																																																																
8" MTSF.....	18	MTSF 8" Rewindable Motors																																																																																																	
10" MTSF.....	19	Performance Data 50 Hz.....	118																																																																																																
TABLE OF HEAD LOSSES																																																																																																			
Connecting Pieces.....	121	SML 6" Rewindable Motors																																																																																																	
Head Losses in Ordinary Water Pipes.....	122	Performance Data 50 Hz.....	119																																																																																																
Head Losses in Plastic Pipes.....	123	MTSF 10" Rewindable Motors																																																																																																	
CABLE SIZING																																																																																																			
Submersible pumps SP A, SP.....	124-125	Performance Data 50 Hz.....	120																																																																																																

GENERAL DATA

PERFORMANCE RANGE

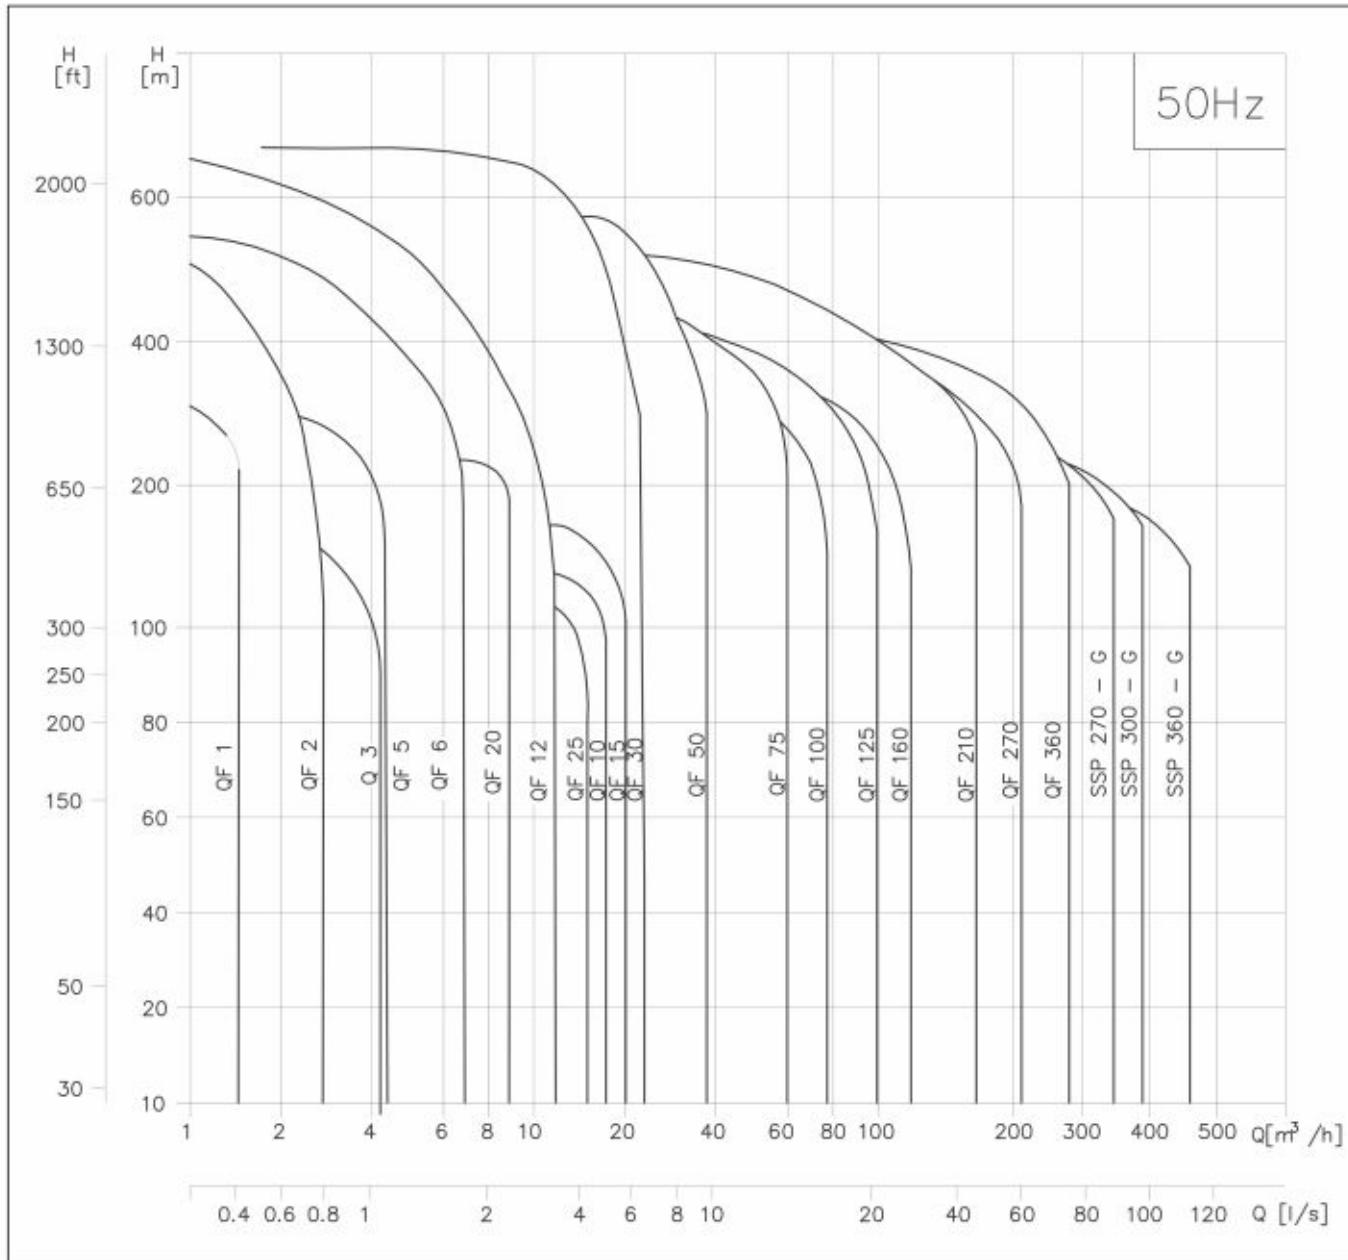

GENERAL DATA

PUMP RANGE

Type	Q3	QF1	QF2	QF5	QF6	QF12	QF20	QF25	QF10	QF15	QF30	QF50	QF75	QF100	QF125	QF160	QF210	QF270	QF360
Steel: AISI SS 304	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	
Connection : Rp (Inches)																			
BSP Thread	1 ^{1/4}	1 ^{1/4}	1 ^{1/4}	1 ^{1/4}	1 ^{1/2}	2	2	2	2	2	2 ^{1/2}	3	3 4	3 4	5	5	6	6	
NPT Thread	1 ^{1/4}	1 ^{1/4}	1 ^{1/4}	1 ^{1/4}	1 ^{1/2}	2	2	2	2	2	3	3 4	3 4	5	5	6	6	6	
Flange Connection															5"	5"	6"	6"	

MOTOR RANGE

MOTOR OUTPUT [kW]	0.37	0.55	0.75	1.1	1.5	2.2	3.0	4.0	5.5	7.5	9.2	11	13	15	18.5	22	26	30	37	45	55	75	93	110	132	147	170	190	220
Single Phase	+	+	+	+	+	+	+	+																					
Three Phase	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+		
Rewindable Motor	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+		
Steel : AISI 304	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+		
Steel : AISI 304 & Cast Iron	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+		

Direct-on-Line starting is recommended up to 7.5 kW.

Soft starter or auto transformer is recommended above 7.5 kW.


APPLICATIONS

The pumps are suitable for the following applications :

- Raw water supply
- Irrigation systems
- Groundwater lowering
- Pressure boosting
- Industrial applications

TYPE KEY

Example

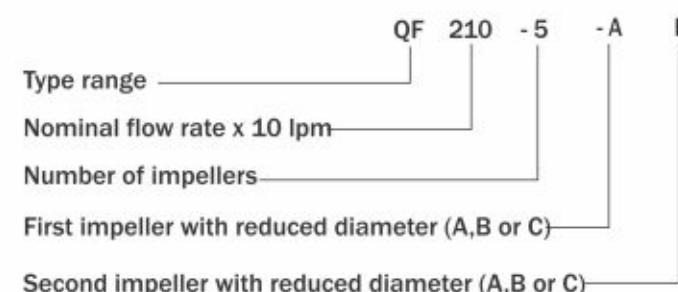**PUMPED LIQUIDS**

Clean, thin, non-aggressive liquids without solid particles or fibres.

OPERATING CONDITIONS

Flow rate, Q: 0.1 - 280 m³/h.
Head, H: Maximum 670m.

Maximum Liquid Temperature:

Motor	Installation		
	Flow velocity-past motor	Vertical	Horizontal
Shakti 3",4",6" & 8"	0.15 m/s	40°C	40°C

Operating pressure: Maximum 0.67m (67 bar)

CURVE CONDITIONS

The conditions below apply to the curves shown on the following pages :

GENERAL

- Curve tolerance according to ISO 9906, Annex A.
- The performance curves show pump performance at actual speed cf. standard motor range.

The speed of the motors is approximately:

3" motors	: n=2850 min ⁻¹
4" motors	: n=2870 min ⁻¹
6" motors	: n=2870 min ⁻¹
8" to 12" motors	: n=2900 min ⁻¹

- The measurements were made with airless water at a temperature of 20°C. The curves apply to a kinematic viscosity of 1mm²/s. When pumping liquids with a density higher than that of water, motors with correspondingly higher outputs must be used.
- The bold curves indicate the recommended performance range.
- The performance curves are inclusive of possible losses such as non-return valve loss.

Q-3, QF1, QF2, QF5, QF6, QF12, QF20, QF25 CURVE

- **Q/H** : The curves are inclusive of valve and inlet losses at the actual speed.
- **Power Curve** : BPkW/Stage shows pump power input per stage.
- **Efficiency Curve** : Efficiency shows pump stage efficiency.

QF10, QF15, QF30, QF50, QF75, QF100, QF125, QF160, QF210, QF270, QF360 CURVE

- **Q/H** : The curves are inclusive of valve and inlet losses at the actual speed. Operation without non-return valve will increase the actual head at nominal performance by 0.5 to 1.0 m.
- **NPSH** The curve is inclusive of suction case and shows required inlet pressure.
- **Power Curve** : It shows pump power input at the actual speed for each individual pump size.
- **Efficiency Curve** : Efficiency shows pump stage efficiency.

SUBMERSIBLE PUMPS**FEATURES AND BENEFITS****A WIDE PUMP RANGE**

We offers submersible pumps with energy efficient duty points ranging from 0.1 to 335 m³/h. The pump range consists of many pump sizes and each pump size is available with an optional number of stages to match any duty point.

HIGH PUMPS EFFICIENCY

Often pump efficiency is a neglected factor compared to the price however, the observant user will notice that price variations are without importance to water supply economics compared to the importance of pump and motor efficiencies.

EXAMPLE:


When pumping 125 m³/h with a head of 200m for a period of 10 years \$ 60,000 will be saved if a pumps and motors having a 10% higher efficiency is chosen and the price is \$ 0.10 per kWh.

APPLICATIONS

We offers a complete range of pumps and motors which as a standard are made completely of stainless steel AISI - 304. This provides for good wear resistance and a reduced risk of corrosion when pumping ordinary cold water with a minor content of chloride.

LOW INSTALLATION COSTS

Stainless steel means low weight facilitating the handling of pumps and resulting in low equipment costs and reduced installation and service time. In addition pumps will be as new after service due to the high wear resistance of stainless steel.

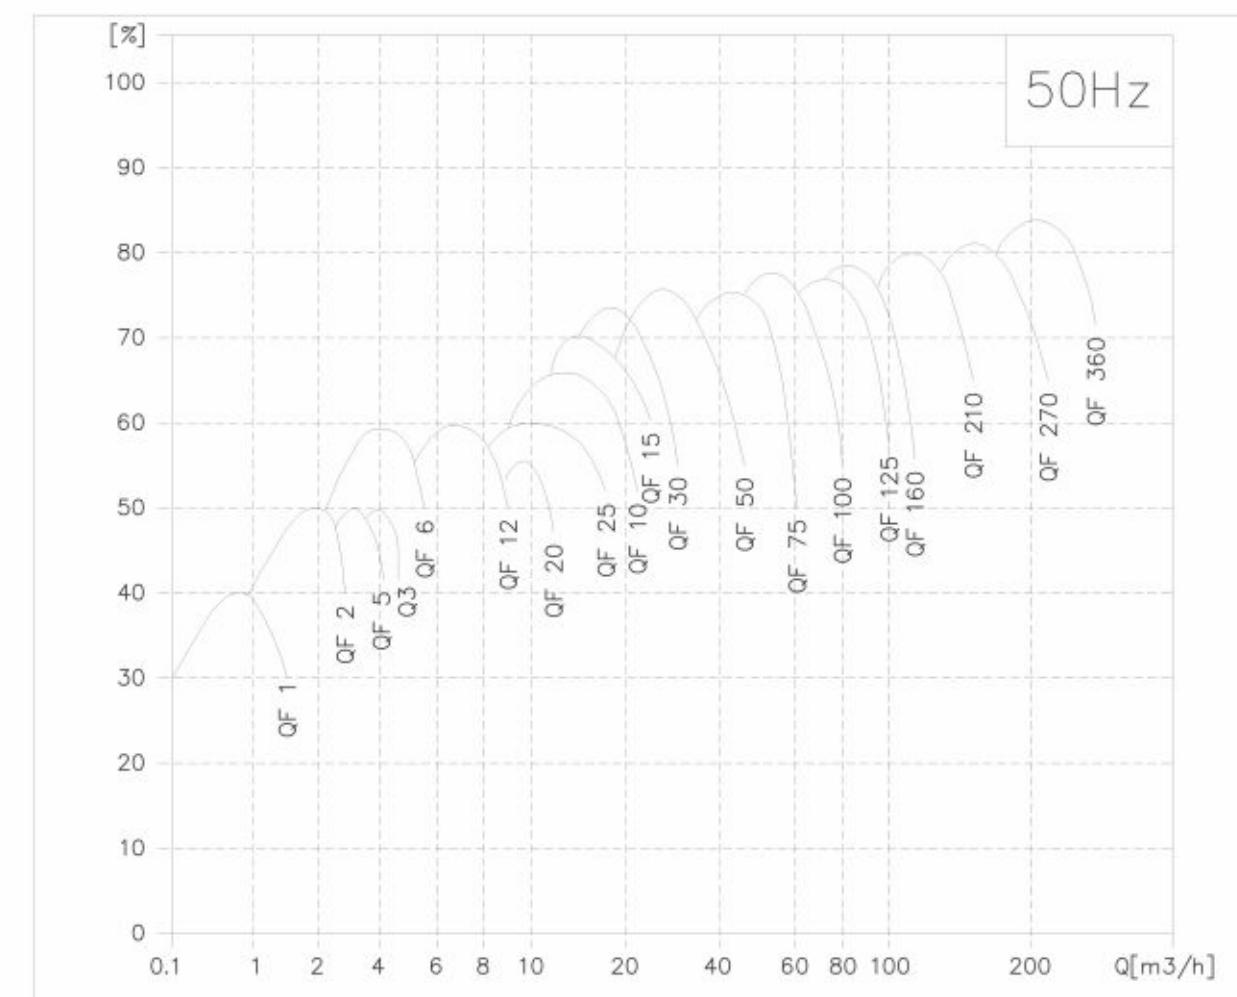

SUBMERSIBLE PUMPS

BEARINGS WITH SAND CHANNELS

All bearings are water-lubricated and have a square shape, enabling sand particles, if any, to leave the pump together with the pumped liquid.




INLET STRAINER

The inlet strainer prevents particles over a certain size from entering the pump.



NON - RETURN VALVE


All pumps are equipped with a reliable non-return valve in the valve casing preventing back flow in connection with pump stoppage. Furthermore, the short closing time of the non-return valve means that the risk of destructive water hammer is reduced to a minimum. The valve casing is designed for optimum hydraulic properties to minimize the pressure loss across the valve and thus contributes to the high efficiency of the pump.

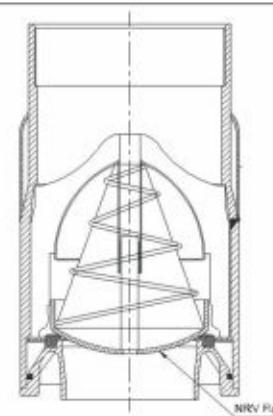

SUBMERSIBLE PUMPS

PRIMING SCREW

All QF and QF 30 pumps are fitted with a priming screw. Consequently, dry running is prevented because the priming screw will make sure that pump bearing are always lubricated. Due to the semi-axial impellers of large QF pumps (except for QF 30) this priming is automatically provided. However, it applies to all pump types that if the water table is lowered to a level below the pump inlet neither pump nor motor will be protected against dry running.

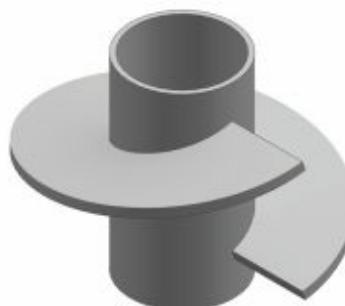


STOP RING

The stop ring prevents damage to the pump during transport and in case of up-thrust in connection with start-up. The stop ring, which is designed as a thrust bearing limits axial movements of the pump shaft.


EXAMPLE : QF 125

The stationary part of the stop ring (A) is secured in the top bowl (Upper intermediate chamber). The rotating part (B) is fitted above the collet [split cone (C)].

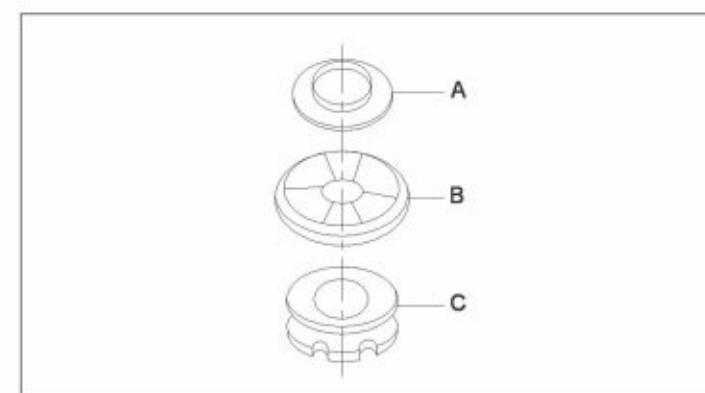

MATERIAL SPECIFICATION

POS.	DESCRIPTION	MATERIAL	STANDARD	N-VERSION
1	VALVE CASING	STAINLESS STEEL	304	316
1d	O-RING	NBR		
2	VALVE CAP	STAINLESS STEEL	304	316
3	VALVE SEAT	STAINLESS STEEL	304	316
3a	LOWER VALVE SEAT RETAINER	STAINLESS STEEL	304	316
3b	UPPER VALVE SEAT RETAINER	STAINLESS STEEL	304	316
4	TOP CHAMBER CUP	STAINLESS STEEL	304	316
6	UPPER BEARING	STAINLESS STEEL	304	316
7	NECKRING	NBR/PPS		
8	BEARING	NBR		
8a	WASHER FOR STOP RING	CARBON/GRAFITE HY22 IN PTFE MASS		
8b	STOP RING	STAINLESS STEEL	304	316
9	CHAMBER	STAINLESS STEEL	304	316
11	SPLIT CONE NUT	STAINLESS STEEL	304	316
11c	NUT FOR STOP RING	STAINLESS STEEL	304	316
12	SPLIT CONE	STAINLESS STEEL	304	316
13	IMPELLER	STAINLESS STEEL	304	316
14	SUCTION INTERCONNECTOR	STAINLESS STEEL	304	316
15	STRAINER	STAINLESS STEEL	304	316
16	SHAFT COMPLETE	STAINLESS STEEL	304	316
17	STRAP	STAINLESS STEEL	304	316
18	CABLE GUARD	STAINLESS STEEL	304	316
19	NUT FOR STRAP	STAINLESS STEEL	304	316
39	SPRING FOR VALVE CUP	STAINLESS STEEL	304	316
70	VALVE GUIDE	STAINLESS STEEL	304	316
71	WASHER	STAINLESS STEEL	304	316
72	WEAR RING	STAINLESS STEEL	304	316

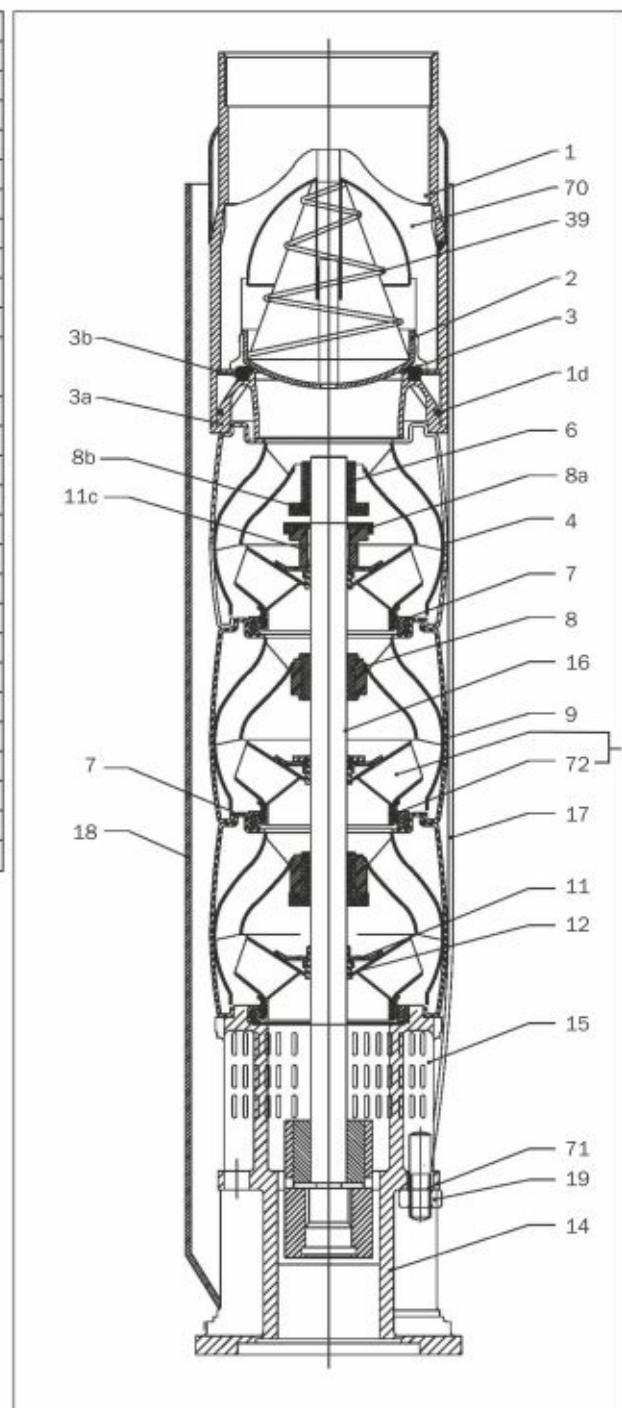EXAMPLE : QF - 125**SUBMERSIBLE MOTORS****FEATURES AND BENEFITS****A COMPLETE MOTOR RANGE**

We offer a complete submersible motor range in diff

- 3"motors, single phase up to 1.5 kW (rewindable)
- 4"motors, single-phase up to 4 kW. (Encapsulated & Rewindable)
- 4"motors, three-phase up to 7.5 kW. (Encapsulated & Rewindable)
- 6"motors, three-phase from 2.2 kW to 37 kW. (Rewindable)
- 8"motors, three-phase from 11 kW to 220 kW. (Rewindable)

HIGH MOTOR EFFICIENCY

Within the area of high motor efficiency Star is a market leader. This is due to newly developed motor concept which is introduced with the Premium 100, Premium 101 and Premium 150.

SHAFT SEAL

The choice of material is ceramic/ tungsten carbide providing optimum sealing, optimum wear resistance and long life.

The spring loaded shaft seal is designed with a large surface and a sand shield. The result is a minimum exchange of pumped and motor liquids and no penetration of particles.

PROTECTION AGAINST UPTHUST

In case of a very small counter pressure in connection with start-up there is a risk that the entire pump body may rise. This is called upthrust. Upthrust may damage both pump and motor. Therefore, both pumps and motors are protected against upthrust as standard, preventing upthrust from occurring in the critical start-up phase. The protection consists of either a built-in stop ring or hydraulic balancing.

BUILT-IN COOLING CHAMBERS

In all submersible motors an efficient cooling is ensured by cooling chambers at the top and at the bottom of the motor, and by an internal circulation of motor liquid. As long as the required flow velocity cooling of the motor will be efficient.




FEATURES AND BENEFITS**OVER TEMPERATURE PROTECTION**


For Shakti submersible motors accessories Pt100 for protection against over temperature is available. When the temperature becomes too high, the protection device will cut-out and damage to the pump and motor be avoided.

PROTECTION AGAINST UPTHUST

In case of a very small counter pressure in connection with start-up there is a risk that the entire pump body may rise. This is called upthrust. Upthrust may damage both pump and motor. Therefore both Shakti pumps and motors are protected against upthrust as standard, preventing upthrust from occurring in the critical startup phase. The protection consists of a built-in upthrust ring.

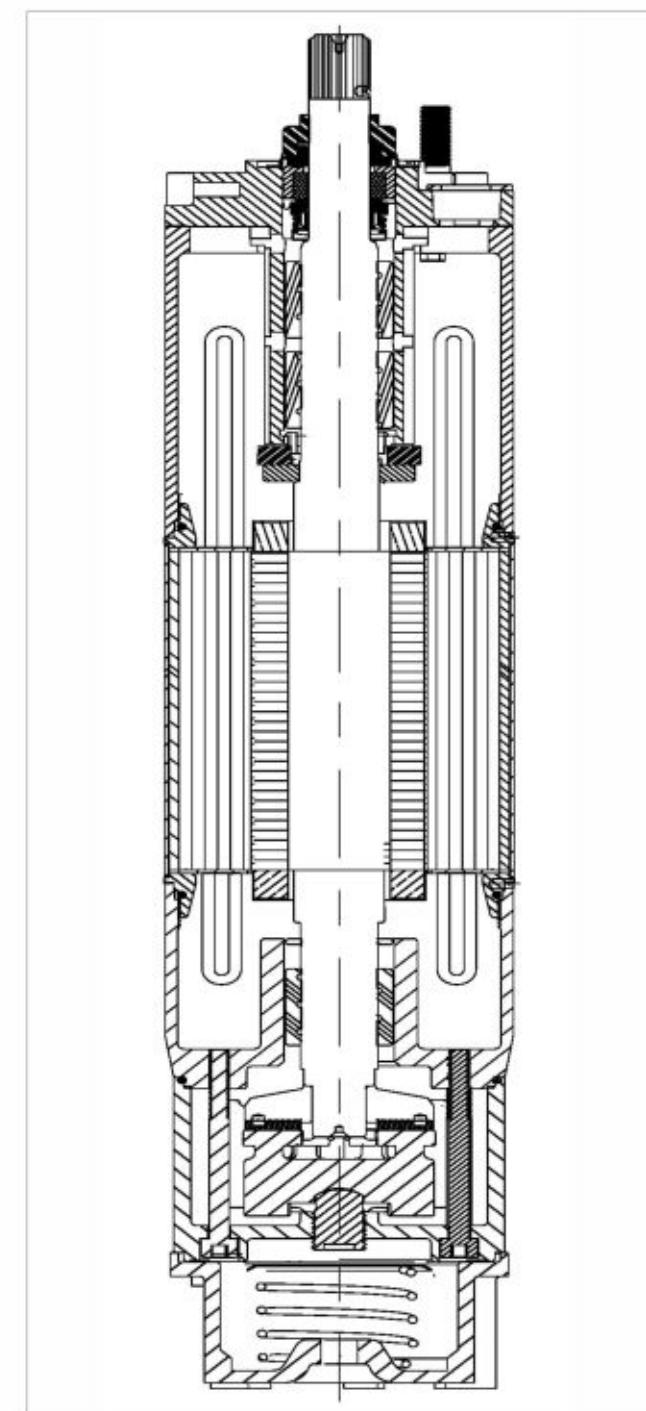
EXAMPLE : 6" MTSF**MATERIAL SPECIFICATION 3 INCH MOTOR**

SR.NO.	PART	MATERIAL
1	SAND SLINGER	NBR
2	SEAL COVER	PPS
3	OIL SEAL	NBR + SS AISI 304
4	TOP END BELL	CI FG-260
5	UP THRUST WASHER	PP
6	BUSH	CARBON WITH RESIN IMPREGNATED
7	ROTOR SHAFT	SS AISI 420
8	ROTOR SUB ASSLY	N/A
9	TOP FLANGE	MS
10	STATOR PIPE	SS AISI-304
11	STATOR SUB ASSLY	N/A
12	THRUST BEARING PLATE	CI FG-260
13	THRUST PAD	SS AISI-420
14	REVOLVING PLATE ASSLY	NA
15	BOTTOM END BELL	CI FG-260
16	MOTOR BASE	CI FG-260
17	DIAPHRAGM	NBR
18	BOTTOM FLANGE	MS
19	ADJUSTING STUD	SS AISI-410

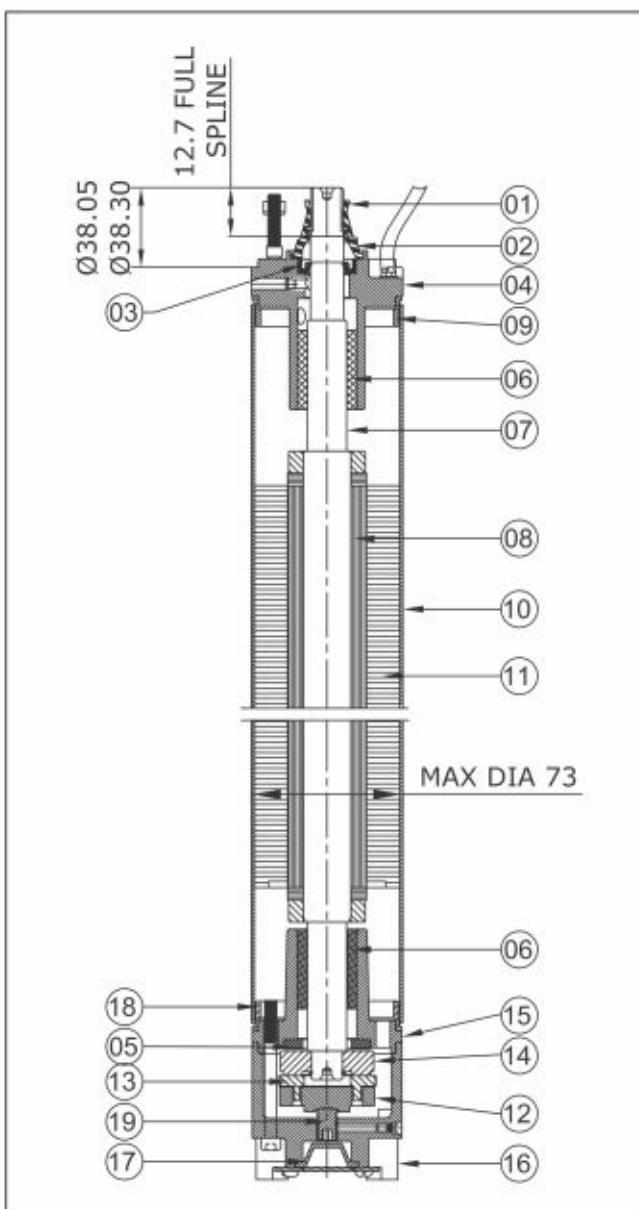
SECTIONAL VIEW OF 3 INCH MOTOR

MATERIAL SPECIFICATION 4" PREMIUM-100

SR.NO.	PART	MATERIAL
1	SAND SLINGER	NBR
2	SEAL COVER	PPS
3	OIL SEAL	EPDM + SS AISI 304
4	TOP END BELL COVER	SS AISI-304
5	TOP END BELL	CI FG-260
6	SHAFT BUSH	NYLON 30% GLASS FILLED
7	BUSH	CARBON WITH RESIN IMPREGNATED
8	ROTOR SHAFT	SS (STAINLESS STEEL SPECIAL GRADE)
9	ROTOR SUB ASSLY	N/A
10	TOP FLANGE	MS
11	STATOR PIPE	SS AISI-304
12	STATOR SUB ASSLY	N/A
13	THRUST DISC	ANTIMONY CARBON
14	THRUST PAD	SS AISI-420
15	LEVELING DISC	MS+ HARD CHROM
16	BOTTOM END BELL	CI FG-260
17	DIAPHRAGM	EPDM
18	BOTTOM FLANGE	MS
19	BOTTOM END BELL COVER	SS AISI-304

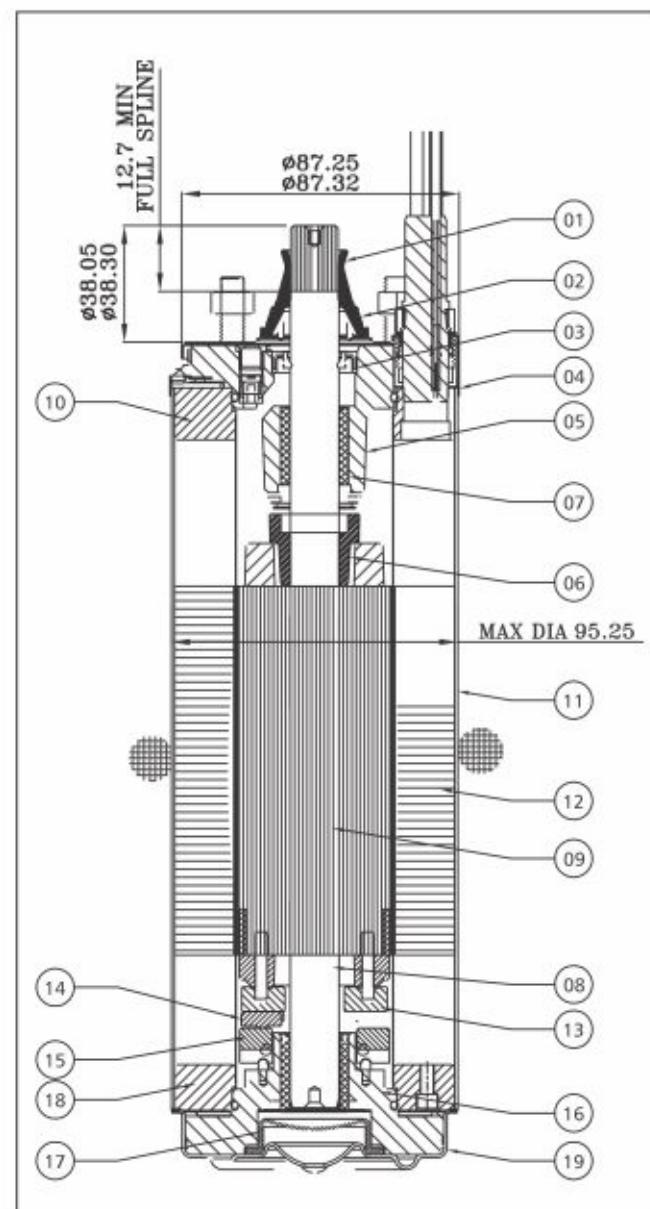SECTIONAL VIEW OF 4" PREMIUM 100**MATERIAL SPECIFICATION 4" PREMIUM-101**

SR.NO.	PART	MATERIAL
1	SAND SLINGER	NBR
2	SEAL COVER	PPS
3	OIL SEAL	EPDM + SS AISI 304
4	TOP END BELL COVER	SS AISI-304
5	TOP END BELL	CI FG-260
6	BUSH	CARBON WITH RESIN IMPREGNATED
7	ROTOR SHAFT	SS (STAINLESS STEEL SPECIAL GRADE)
8	ROTOR SUB ASSLY	N/A
9	TOP FLANGE	MS
10	STATOR PIPE	SS AISI-304
11	STATOR SUB ASSLY	N/A
12	THRUST HOUSING	CI FG-260
13	THRUST PIPE	SS AISI-304
14	THRUST DISC	CI FG-260
15	CARBON PLATE	REGIN IMPREGNATED
16	LEVELING DISC	SS AISI 420
17	ADJUSTING STUD	SS AISI-410
18	BOTTOM END BELL	CI FG-260
19	DIAPHRAGM	EPDM
20	BOTTOM FLANGE	MS
21	DIAPHRAGM COVER	SS AISI-304

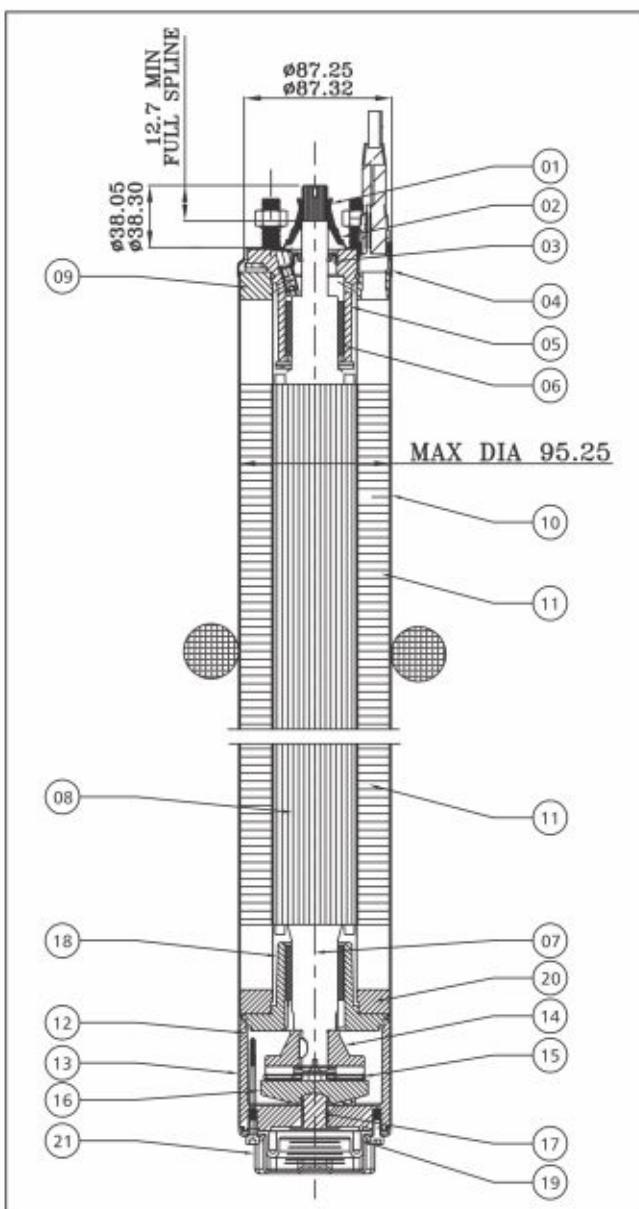
SECTIONAL VIEW OF 4" PREMIUM 101

SUBMERSIBLE MOTORS

MATERIAL SPECIFICATION 4" MCIP-100

SR.NO.	COMPONENT	MATERIAL
1	SEND SLINGER	NBR
2	SEAL COVER	PPS
3	STUD	SS AISI-304
4	OIL SEAL	EPDM+ SS AISI 304
5	UPPER HOUSING	CI FG-260
6	BUSH	CARBON WITH RESIN IMPREGNATED
7	SHAFT BUSH	NYLON 30% GLASS FILLED
8	ROTOR SUB ASSY	N/A
9	STATOR SUB ASSY	N/A
10	THRUST DISK	ANTIMONY CARBON
11	THRUST PAD	SS AISI-420
12	LEVELING DISK	HIGH GRADE
13	BOTTOM END BELL	CI FG-260
14	DIAPHRAGM	EPDM
15	END BELL COVER	SS AISI-304


SECTIONAL VIEW OF 4" MCIP 100

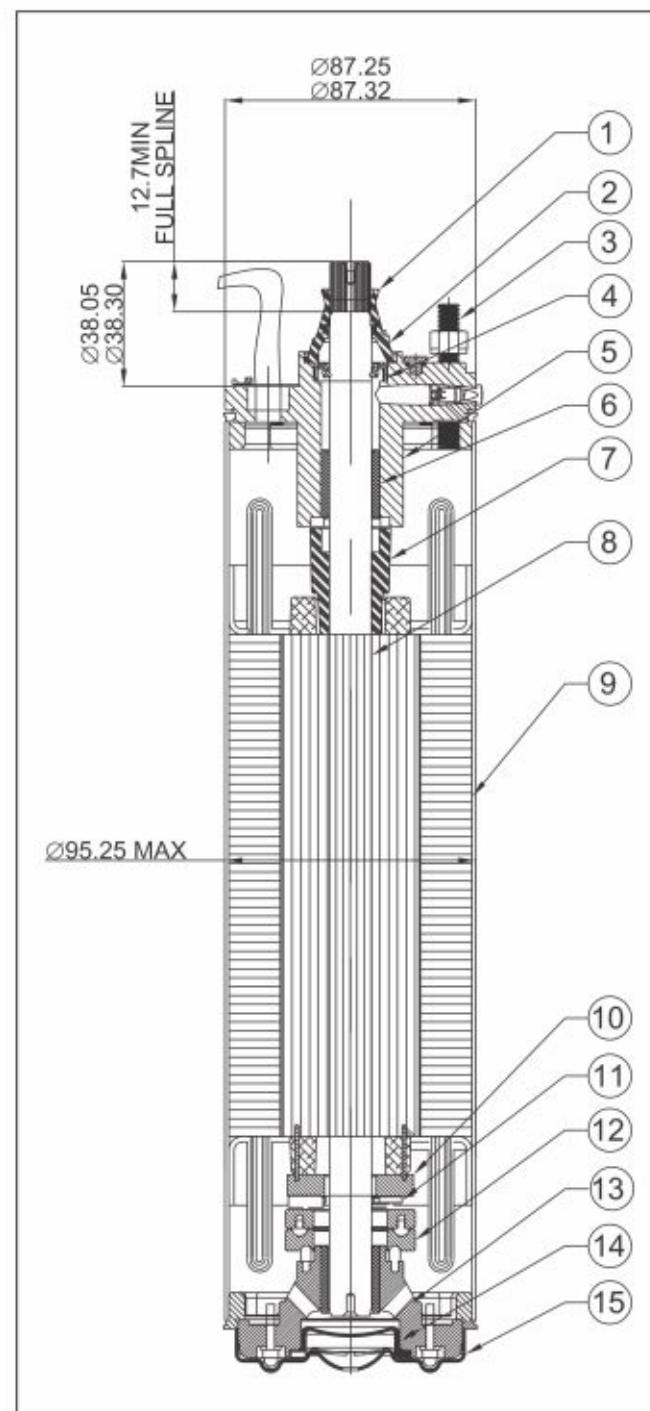

MATERIAL SPECIFICATION 4" MCIP-101


SR.NO.	COMPONENT	MATERIAL
1	SEND SLINGER	NBR
2	SEAL COVER	PPS
3	STUD	SS AISI-304
4	OIL SEAL	EPDM+ SS AISI 304
5	UPPER HOUSING	CI FG-260
6	BUSH	CARBON WITH RESIN IMPREGNATED
7	ROTOR SUB ASSY	N/A
8	STATOR SUB ASSY	N/A
9	BOTTOM END BELL	CI FG-260
10	THRUST DISK	ANTIMONY CARBON
11	THRUST HOUSING	CI FG-260
12	THRUST SEGMENT	SS AISI-420
13	LEVELING DISK	SS AISI-304
14	ADJUSTING STUD	SS AISI-410
15	DIAPHRAGM	EPDM
16	DIAPHRAGM SPRING	SPRING STEEL
17	DIAPHRAGM COVER	STAINLESS STEEL

SECTIONAL VIEW OF 4" MCIP 101

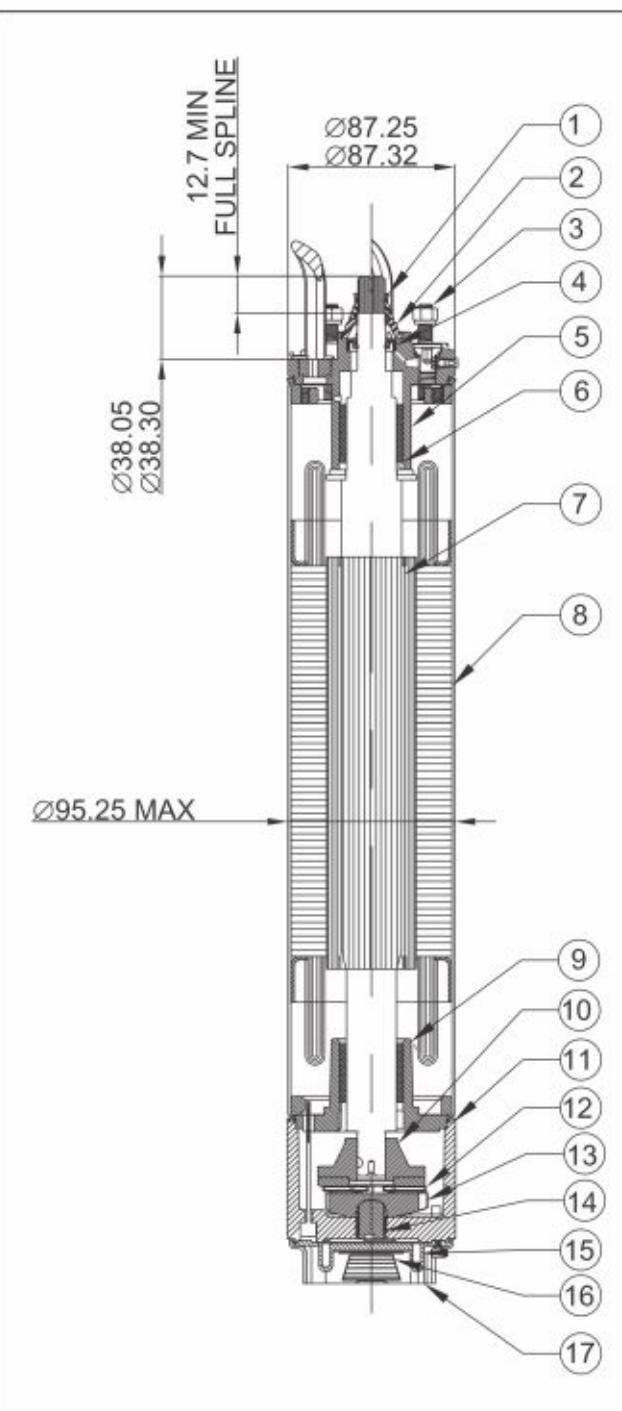


MATERIAL SPECIFICATION 6" MTSF

S No.	COMPONENT	MATERIAL		
		CIFG-260	SS AISI 304	SS AISI 316
1	SAND SLINGER	NBR	NBR	NBR
2	STUD	CI FG-260	SS AISI 304	SS AISI 316
3	MECH SEAL	SiC/SiC	SiC/SiC	SiC/SiC
4	END BELL UPPER	CI FG-260	SS AISI 304	SS AISI 316
5	BUSH	RESIN IMPREGANTED CARBON	RESIN IMPREGANTED CARBON	RESIN IMPREGANTED CARBON
6	UP THRUST	NYLON30% GLASS FILLED	NYLON30% GLASS FILLED	NYLON30% GLASS FILLED
7	ROTOR SUB ASSY	N/A	N/A	N/A
8	STATOR SUB ASSY	N/A	N/A	N/A
9	END BELL LOWER	CI FG-260	SS AISI 304	SS AISI 316
10	REVOLVING PLATE ASSY	N/A	N/A	N/A
11	THRUST HOUSING BEARING	CI FG-260	SS AISI 304	SS AISI 316
12	DIAPHRAGM	EPDM	EPDM	EPDM
13	DIAPHRAGM SPRING	SPRING STEEL	SPRING STEEL	SPRING STEEL
14	MOTOR BASE	CI FG-260	SS AISI 304	SS AISI 316

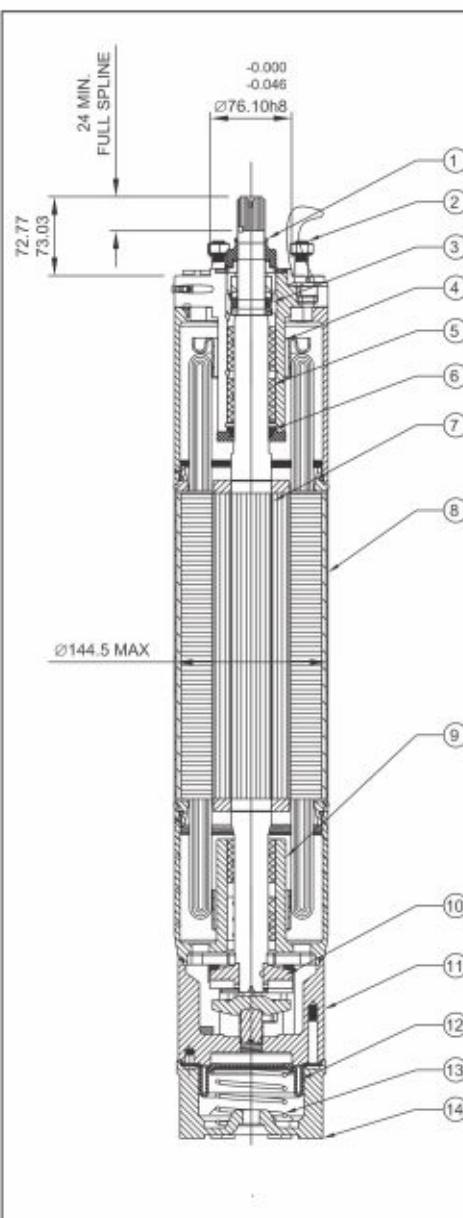SECTIONAL VIEW OF 6" MTSF**MATERIAL SPECIFICATION 6" SML**

SR.No.	COMPONENT	MATERIAL
1	SAND SLINGER	NBR
2	STUD	SS AISI 304
3	OIL SEAL	EPDM + SS 304
4	UPPER HOUSING	CI FG-260
5	END BELL UPPER	CI FG-260
6	BUSH	RESIN IMPREGNATED CARBON
7	UP THRUST BEARING	NYLON 30% GLASS FILLED
8	ROTOR SUB ASSY	N/A
9	STATOR SUB ASSY	N/A
10	END BELL LOWER	CI FG-260
11	REVOLVING PLATE ASSY	N/A
12	THRUST SEGMENT	SS AISI 304
13	THRUSTING BEARING PLATE	CI FG-260
14	ADJUSTING STUD	DUPLEX
15	DIAPHRAGM	EPDM
16	DIAPHRAGM SPRING	SPRING STEEL
17	MOTOR BASE	CI FG-260

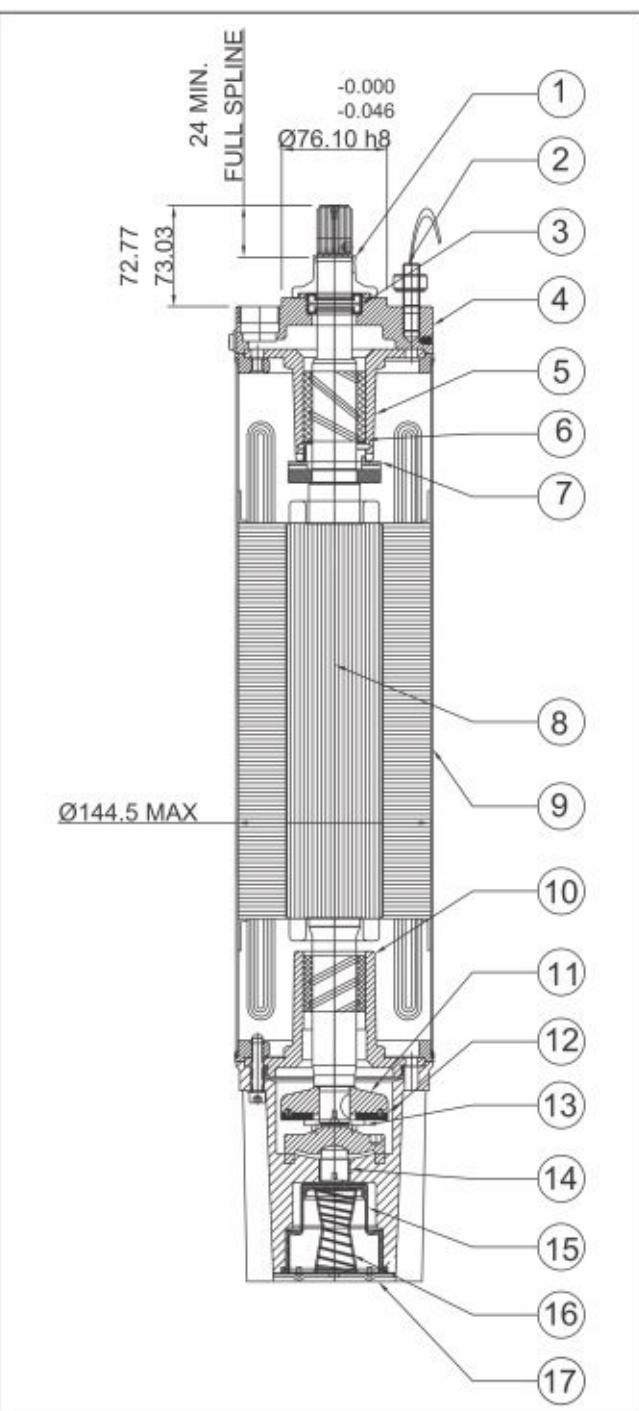
SECTIONAL VIEW OF 6" SML

SUBMERSIBLE MOTORS

MATERIAL SPECIFICATION 8" MTSF

SR.NO.	COMPONENT	MATERIAL
1	SAND SLINGER	NBR
2	DUST COVER	CI FG-260
3	STUD	SS AISI 304
4	MECH SEAL	STD
5	UPPER HOUSING	CI FG-260
6	END BELL UPPER	CI FG-260
7	BUSH	METAL IMPREGNATED ANTI-MONY
8	END LAMINATION	PPS
9	STATOR SUB ASSY	N/A
10	ROTOR SUB ASSY	N/A
11	END BELL LOWER	CI FG-260
12	REVOLVING PLATE ASSY	N/A
13	THRUST HOUSING BEARING	CI FG-260
14	THRUST BEARING SUPPORT	CI FG-260
15	ADJUSTING STUD	DUPLEX
16	DIAPHRAGM	EPDM
17	DIAPHRAGM SPRING	SPRING STEEL
18	MOTOR BASE	CI FG-260


SECTION VIEW 8" MTSF

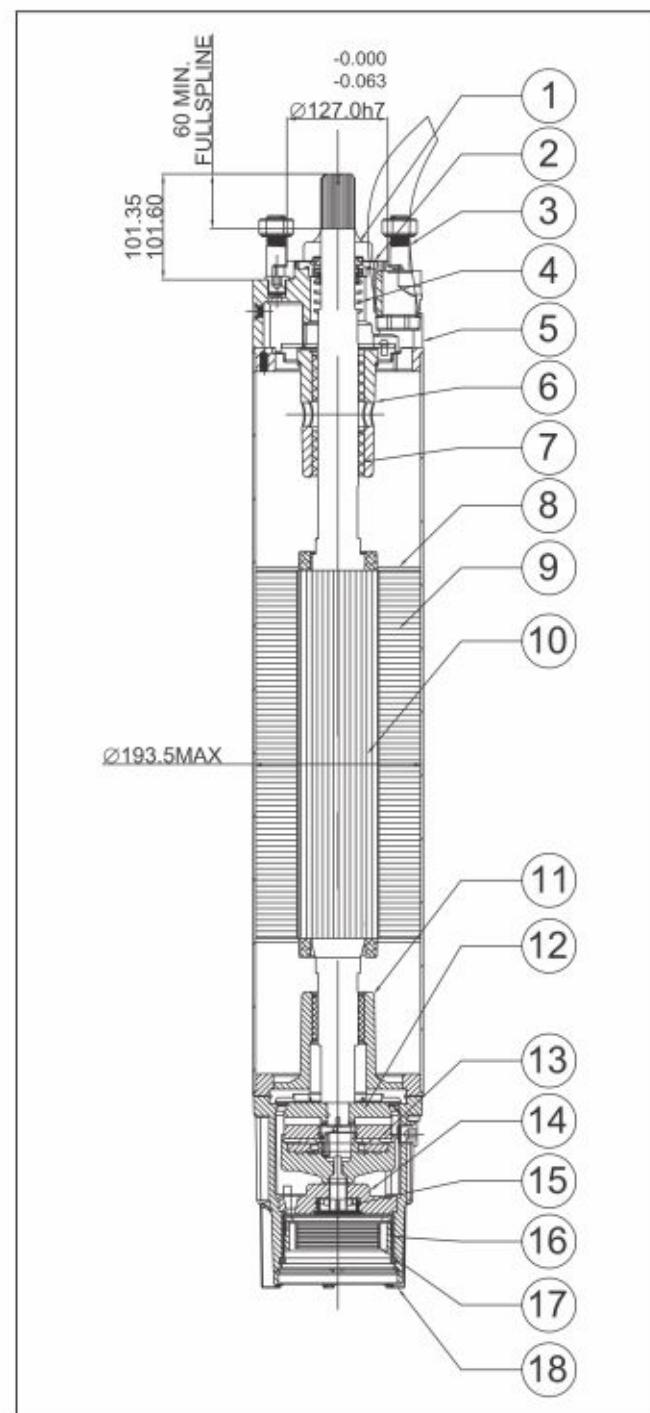

MATERIAL SPECIFICATION 10" MTSF

SR.NO.	COMPONENT	MATERIAL
1	SEND SLINGER	NBR
2	DUST COVER	MS
3	MECH SEAL	STD
4	ADOPTER	CI FG-260
5	BEARING BODY UPPER	CI FG-260
6	BUSH	CARBON
7	WINDING WIRE	STD
8	AUXILLIARY IMPELLER	PPS
9	END LAMINATION	MS
10	STATOR SUB ASSY	N/A
11	ROTOR SUB ASSY	N/A
12	BEARING BODY LOWER	CIFG-260
13	THRUST BEARING ASSY	CIFG-260
14	SEGMENT	SS AISI 420
15	BEARING SEGMENT CARRIER	CI FG-260
16	THRUST SUPPORT	CI FG-260
17	DIAPHRAGM	EPDM
18	SPRING BASE CUP	ABS
19	DIAPHRAGM SPRING	SS AISI 304
20	DIAPHRAGM COVER	SS AISI 304
21	THRUST HOUSING	CIFG-260
22	CIRCLIP	SS AISI 302


SECTIONAL VIEW OF 10" MTSF

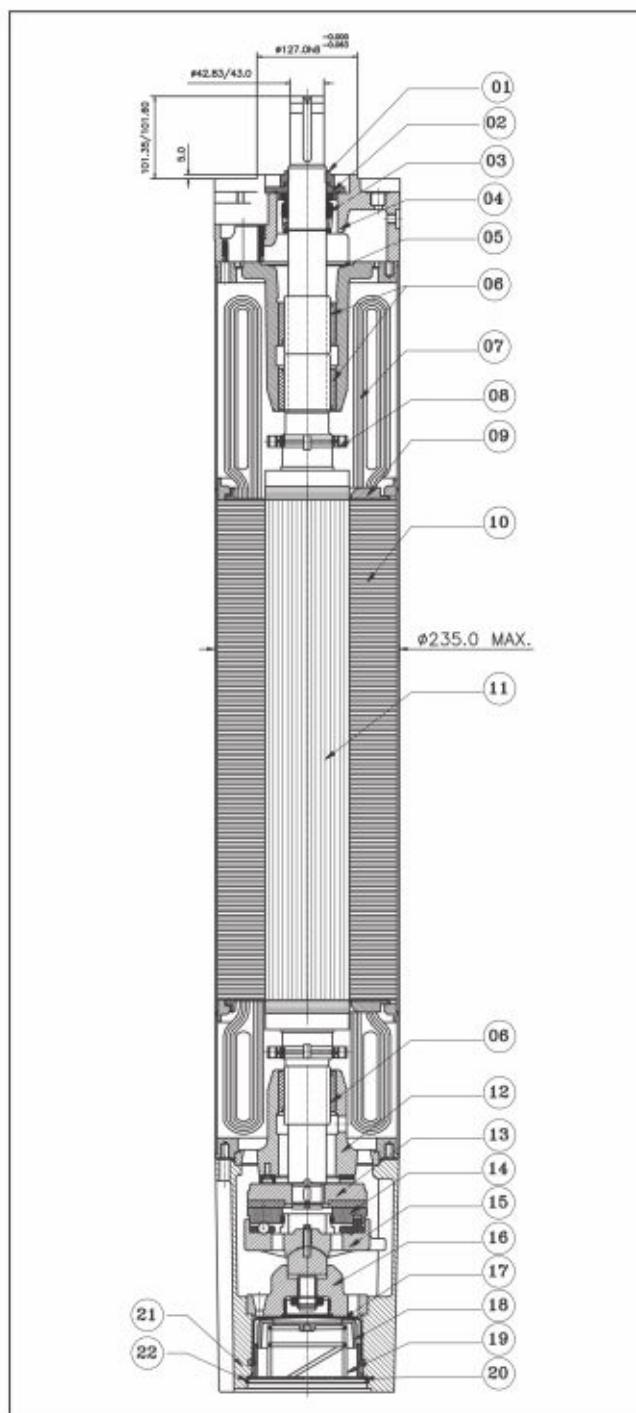

PERFORMANCE CURVE


TECHNICAL DATA

SUBMERSIBLE PUMP Q 3

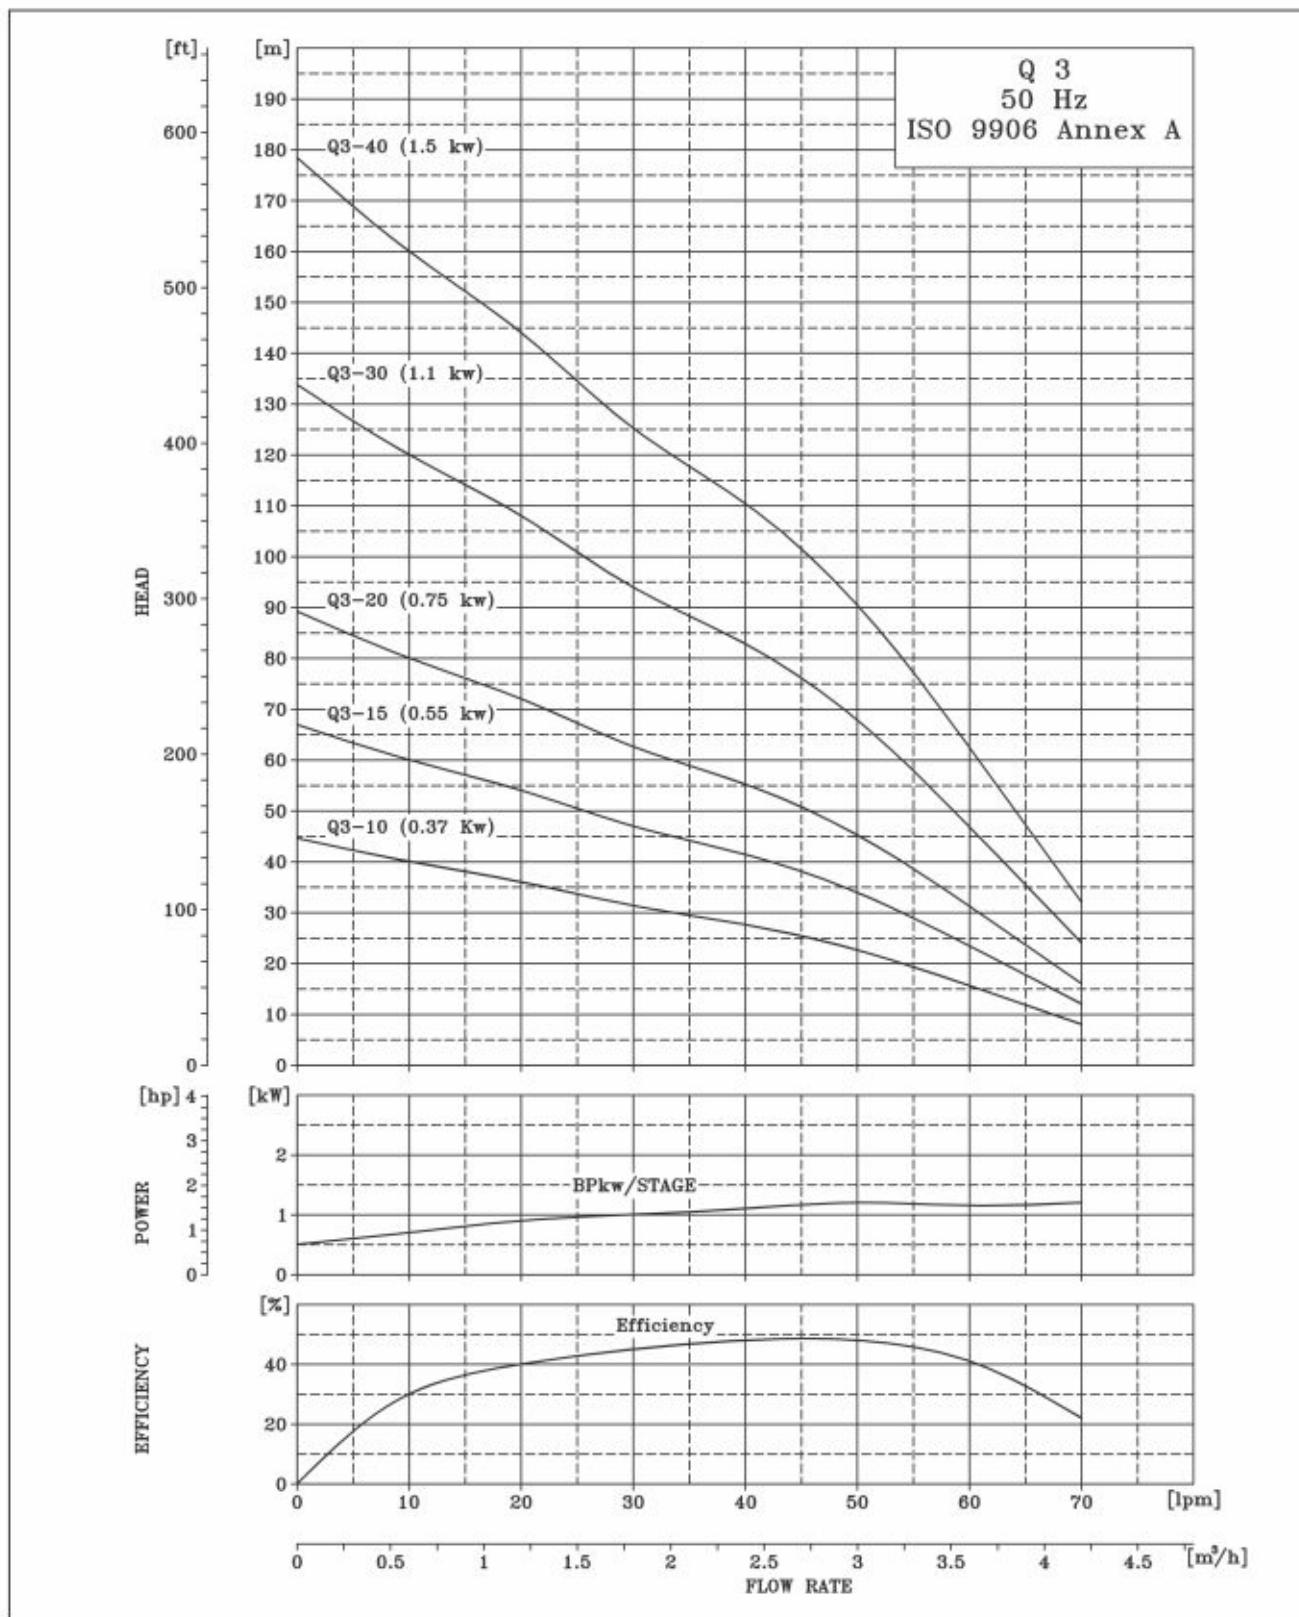

SUBMERSIBLE PUMP Q 3

DIMENSIONS AND WEIGHTS

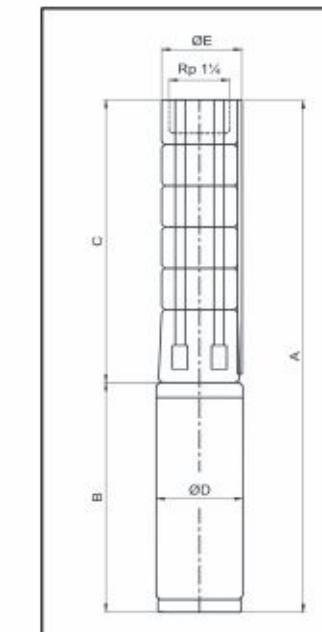

E = Maximum diameter of pump inclusive of cable guard & motor.

TECHNICAL DATA Q 3

PUMP TYPE	MOTOR		DIMENSIONS (MM)				NET WEIGHT (KG)		
	TYPE*	POWER (kW)	C	B	A	D	E	PUMP	MOTOR
		1x230V	1x230V					1x230V	
Q3 - 10	V3 MOTOR	0.37	402	501	903	73	3	3	9
Q3 - 15	V3 MOTOR	0.55	507	501	1008	73	83	4	10
Q3 - 20	V3 MOTOR	0.75	612	551	1163	73	83	5	12
Q3 - 30	V3 MOTOR	1.1	822	601	1423	73	83	7	15
Q3 - 40	V3 MOTOR	1.5	1032	-	-	73	83	8	18

* Motor type may change as per requirement.


PERFORMANCE TABLE Q 3

QF-3			DISCHARGE (Q)										
			m ³ /h	0.6	1.2	1.8	2.4	3	4.2				
MODEL	CONNECTION	MATERIAL CODE (4x4)	MOTOR RATING	I~	3~	TOTAL HEAD IN (m)							
			[kW]	[HP]	[A]	[A]							
			9000017891	0.37	0.5	4.1	-	40	36	32	27	23	10
			9000018520	0.55	0.75	6.2	-	60	53	47	41	34	15
			9000018521	0.75	1	8.3	-	80	71	62	55	45	20
			-	0.93	1.25	10	-	104	93	81	72	59	26
			9000018522	1.1	1.5	12.5	-	120	107	94	83	68	24
			-	1.5	2	16.5	-	160	142	125	110	90	40

PERFORMANCE CURVE


TECHNICAL DATA

SUBMERSIBLE PUMP QF 1

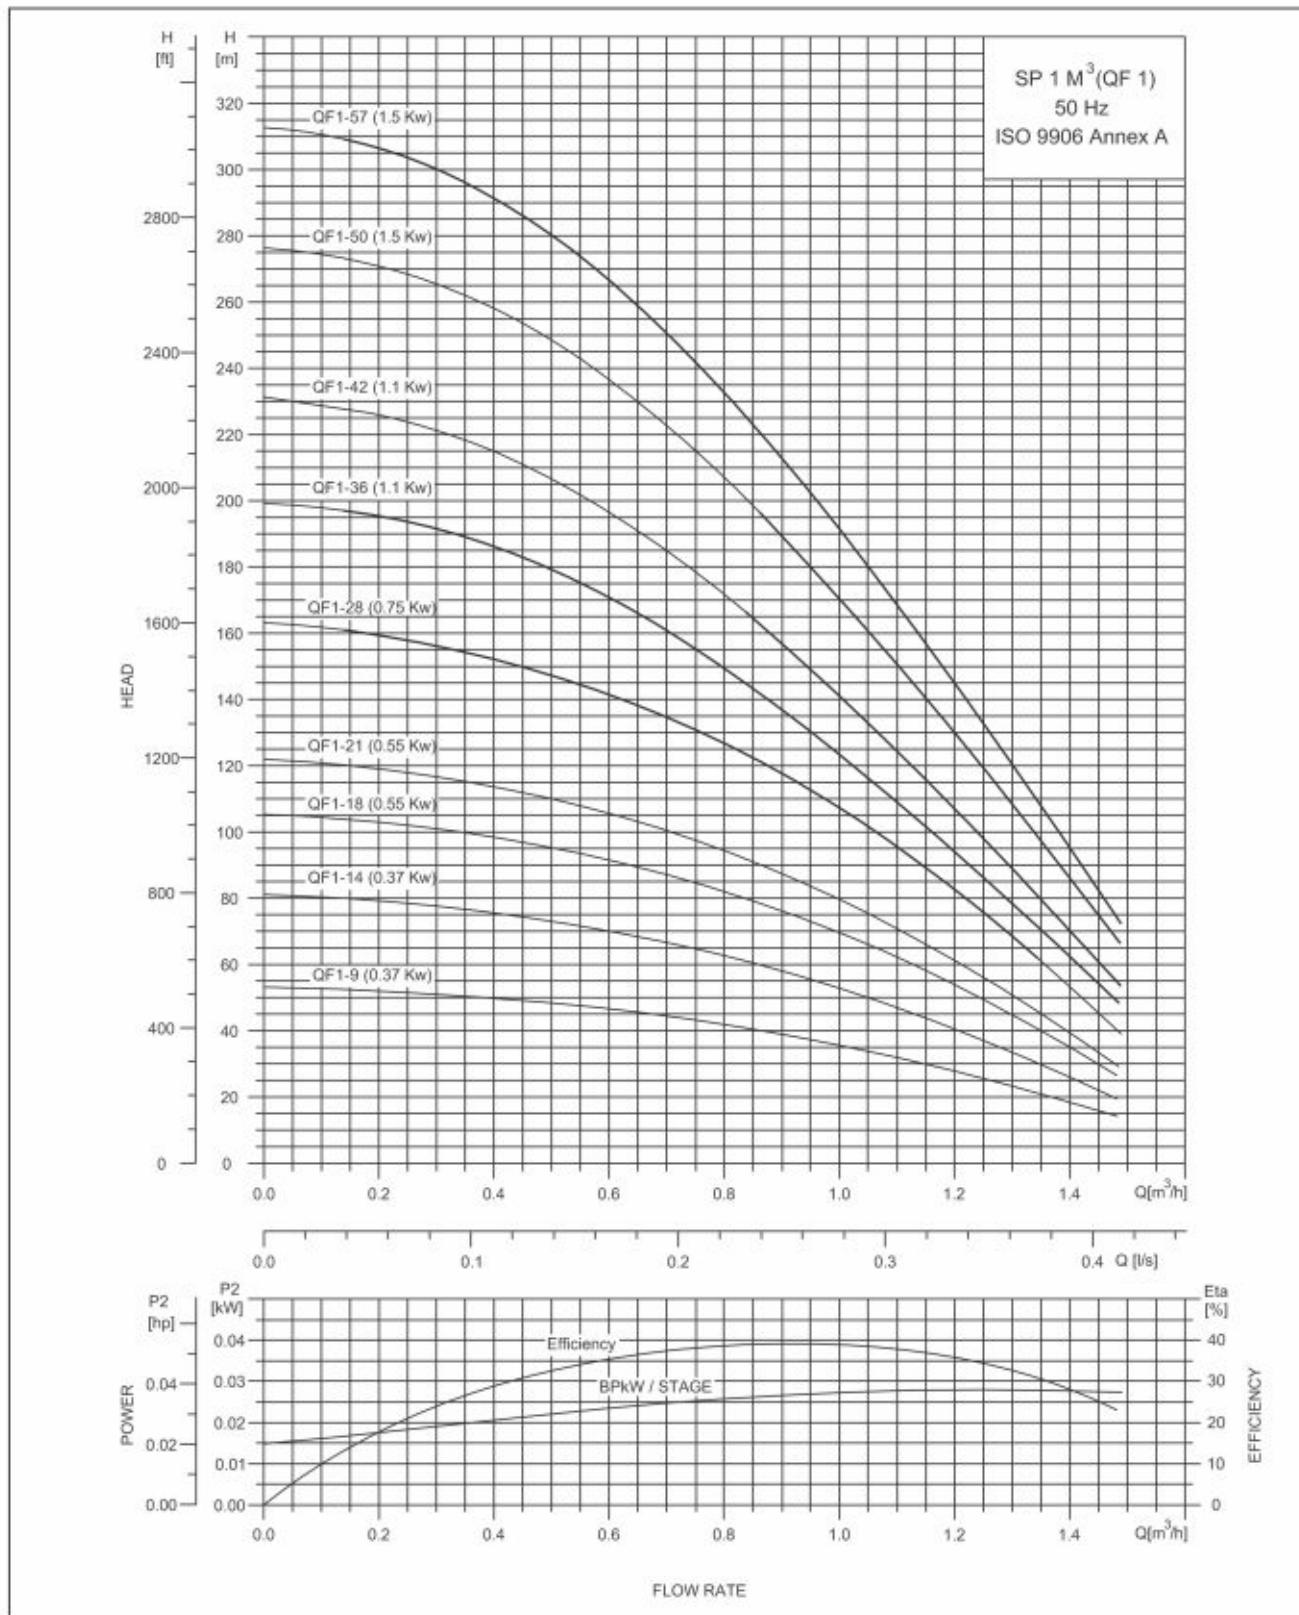

SUBMERSIBLE PUMP QF 1

DIMENSIONS AND WEIGHTS

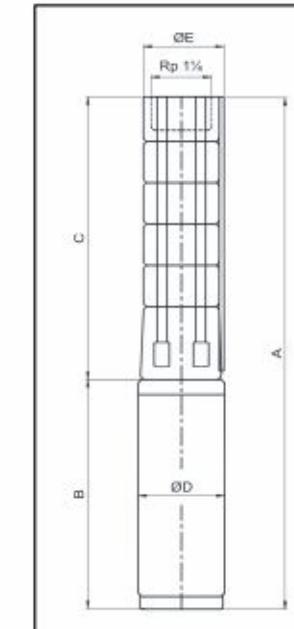

E = Maximum diameter of pump inclusive of cable guard & motor.

TECHNICAL DATA QF 1

PUMP TYPE	MOTOR		C	DIMENSIONS (MM)				NET WEIGHT (KG)			
	TYPE	POWER (kW)		1x230V	3x220V 3x400V	1x230V	3x220V 3x400V	D	E	PUMP	MOTOR
											1x230V
QF 1 - 9	4" PREMIUM 100	0.37	344	256	226	600	570	95	101	4	11
QF 1 - 14	4" PREMIUM 100	0.37	449	256	226	705	675	95	101	5	12
QF 1 - 18	4" PREMIUM 100	0.55	533	291	241	824	774	95	101	6	14
QF 1 - 21	4" PREMIUM 100	0.55	596	291	241	887	837	95	101	7	14
QF 1 - 28	4" PREMIUM 100	0.8	743	306	276	1049	1019	95	101	9	16
QF 1 - 36	4" PREMIUM 100	1.1	956	346	306	1302	1262	95	101	10	25
QF 1 - 42	4" PREMIUM 100	1.1	1082	346	306	1428	1388	95	101	13	27
QF 1 - 50	4" PREMIUM 100	1.5	1250	346	346	1596	1596	95	101	14	30
QF 1 - 57	4" PREMIUM 100	1.5	1397	346	346	1743	1743	95	101	15	32

* Motor type may change as per requirement.


PERFORMANCE TABLE QF 1

QF-1				DISCHARGE (Q)								TOTAL HEAD IN (m)			
MODEL	CONNECTION	MATERIAL CODE (4x4)	MOTOR RATING	I-		3-		TOTAL HEAD IN (m)							
				[kW]	[HP]	[A]	[A]	0	0.2	0.4	0.6	0.8	1	1.2	1.4
QF1-9	Rp1½	9000002475	0.37	0.5	2.9	1.4	53	52	50	46	42	36	27	18	
QF1-14		9000002460	0.37	0.5	2.9	1.4	82	79	75	70	63	53	40	26	
QF1-18		9000002462	0.55	0.75	4	2.2	105	103	98	92	82	69	53	35	
QF1-21		9000002463	0.55	0.75	4	2.2	122	118	113	105	95	80	61	40	
QF1-28		9000002466	0.75	1	5.5	2.3	163	159	151	142	126	106	82	53	
QF1-36		9000002468	1.1	1.5	8.2	3.4	199	195	186	170	149	123	94	62	
QF1-42		9000002470	1.1	1.5	8.2	3.4	231	226	215	196	171	140	106	70	
QF1-50		9000002472	1.5	2.0	10.2	4.2	276	271	257	236	206	170	130	86	
QF1-57		9000002473	1.5	2.0	10.2	4.2	313	306	291	266	233	192	145	95	

PERFORMANCE CURVE


TECHNICAL DATA

SUBMERSIBLE PUMP QF 2

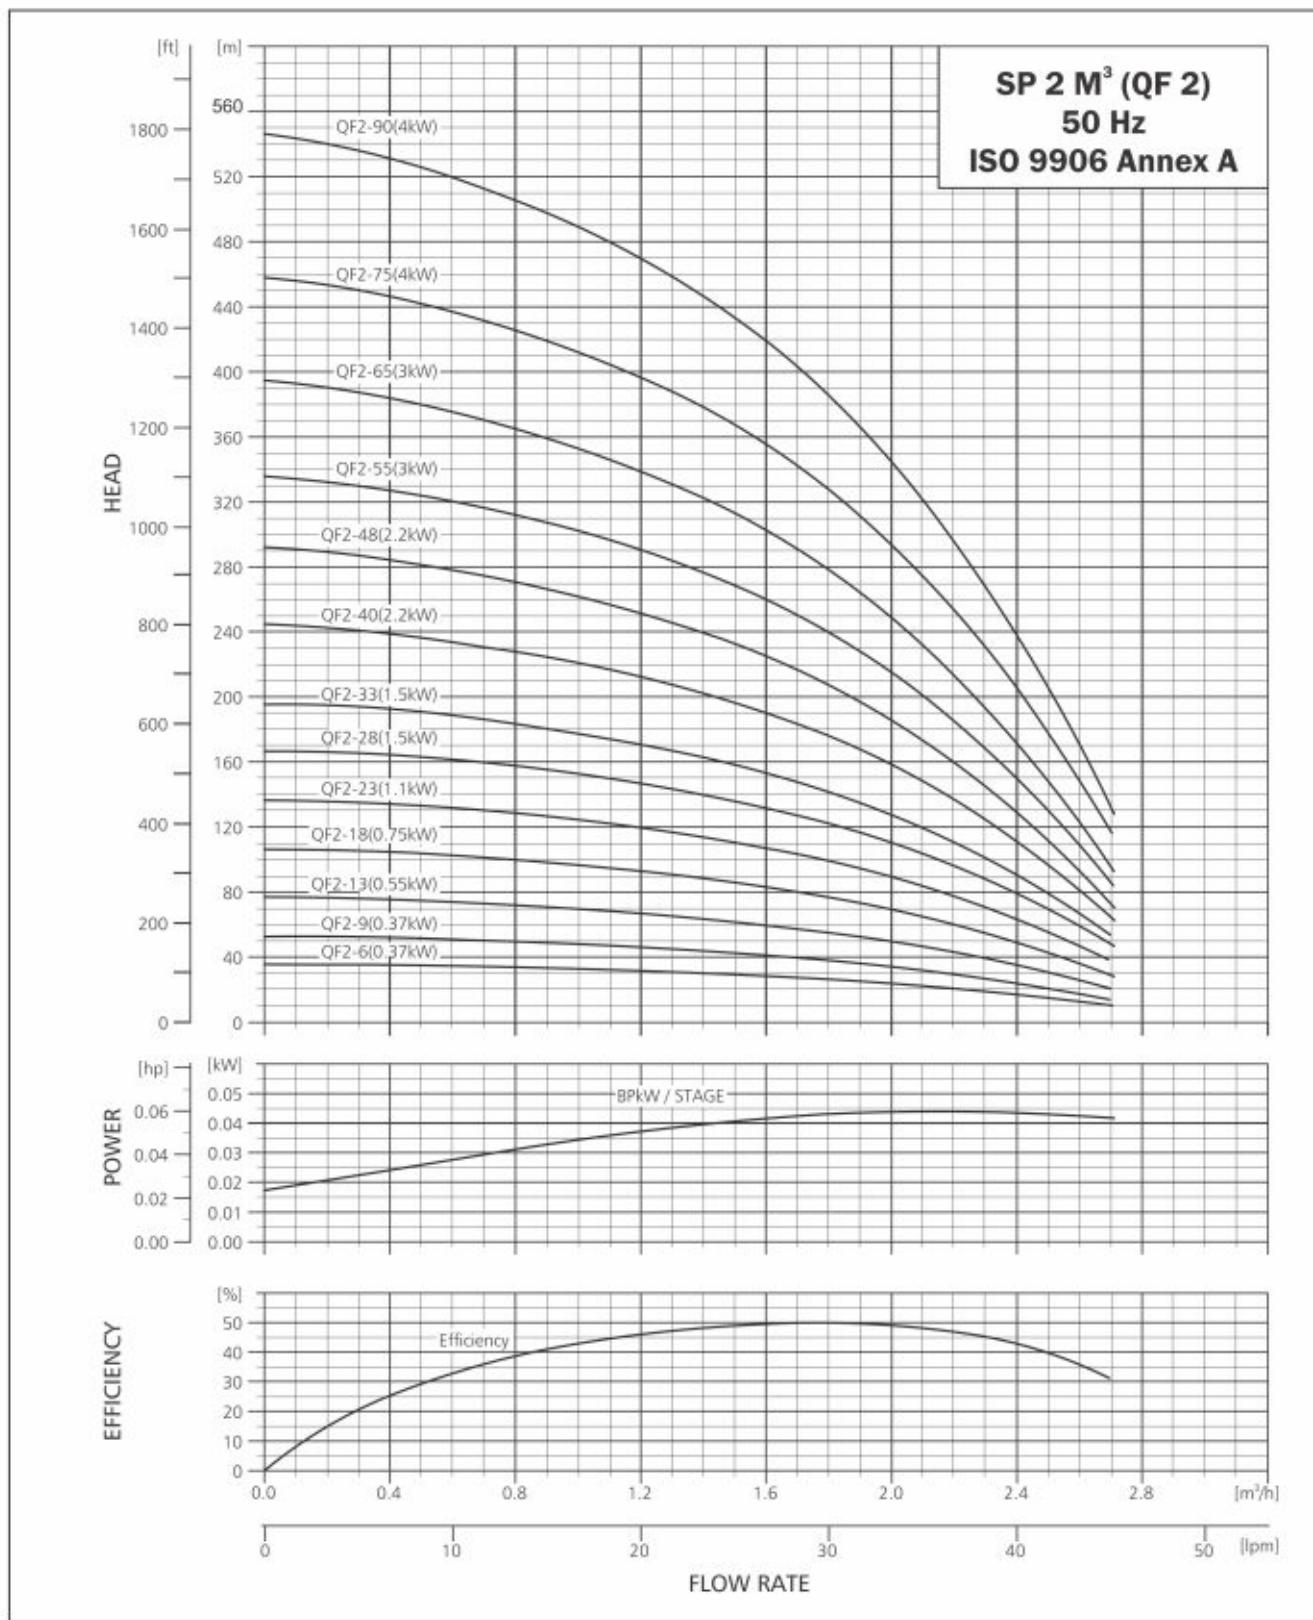

SUBMERSIBLE PUMP QF 2

DIMENSIONS AND WEIGHTS

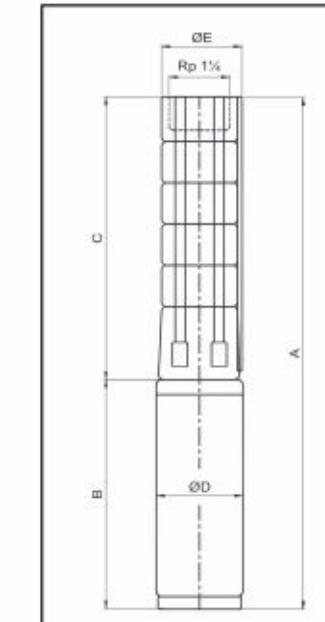

E = Maximum diameter of pump inclusive of cable guard & motor.

QF 2 -75 to QF 2-90 are mounted in sleeve for R 1 1/4" connection and with max. diameter 108 mm.

TECHNICAL DATA QF 2

PUMP TYPE	MOTOR		DIMENSIONS (MM)				NET WEIGHT (KG)		
	TYPE	POWER (kW)	C	B 1x230V 3x400V	A 3x220V 3x400V	D 1x230V 3x400V	E PUMP 1x230V 3x400V	MOTOR 1x220V 3x400V	
QF 2 - 6	PREMIUM 100	0.37	309	242	-	551	-	95	101
QF 2 - 9	PREMIUM 100	0.37	372	242	-	614	-	95	101
QF 2 - 13	PREMIUM 100	0.55	456	271	242	727	698	95	101
QF 2 - 18	PREMIUM 100	0.75	561	292	271	853	832	95	101
QF 2 - 23	PREMIUM 100	1.1	666	340	292	1006	958	95	101
QF 2 - 28	PREMIUM 100	1.5	771	405	340	1176	1111	95	101
QF 2 - 33	PREMIUM 100	1.5	876	405	340	1281	1216	95	101
QF 2 - 40	PREMIUM 100	2.2	1023	482	405	1505	1428	95	101
QF 2 - 48	PREMIUM 100	2.2	1191	482	405	1673	1596	95	101
QF 2 - 55	PREMIUM 100	3.0	1338	-	482	-	1820	95	101
QF 2 - 65	PREMIUM 100	3.0	1548	-	482	-	2030	95	101
QF 2 - 75	PREMIUM 101	4.0	1758	693	-	2451	-	95	101
QF 2 - 90	PREMIUM 101	4.0	2073	693	-	2766	-	95	101

* Motor type may change as per requirement.


PERFORMANCE TABLE QF 2

QF-2				DISCHARGE (Q)								TOTAL HEAD IN (m)			
MODEL	CONNECTION	MATERIAL CODE (4x4)	MOTOR RATING	I-		3-		TOTAL HEAD IN (m)							
				[kW]	[HP]	[A]	[A]	0	1	1.4	1.8	2	2.4	2.7	
QF2 - 6	Rp 1 1/4	9000002503	0.37	0.5	2.9	1.4	36	33	30	26	24	17	10		
QF2 - 9		9000002506	0.37	0.5	2.9	1.4	53	48	44	38	34	24	14		
QF2 - 13		9000002494	0.55	0.75	4.0	2.2	77	70	64	55	50	35	20		
QF2 - 18		9000002495	0.75	1.0	5.5	2.3	107	97	89	77	69	49	29		
QF2 - 23		9000002497	1.1	1.5	8.2	3.4	137	124	114	99	90	64	38		
QF2 - 28		9000002498	1.5	2.0	10.2	4.2	167	152	140	122	110	79	49		
QF2 - 33		9000002499	1.5	2.0	10.2	4.2	196	178	163	142	128	90	55		
QF2 - 40		9000002500	2.2	3.0	14.0	5.5	245	221	203	176	158	111	65		
QF2 - 48		9000002501	2.2	3.0	14.0	5.5	292	262	240	207	186	129	72		
QF2 - 55		9000002502	3.0	4.0	-	7.9	336	302	277	240	215	150	86		
QF2 - 65	sleeve	9000002504	3.0	4.0	-	7.9	395	352	323	280	250	170	94		
QF2 - 75		9000002505	4.0	5.5	-	9.6	457	412	378	328	292	205	118		
QF2 - 90		-	4.0	5.5	-	9.6	545	489	446	386	345	237	130		

PERFORMANCE CURVE


TECHNICAL DATA

SUBMERSIBLE PUMP QF 5

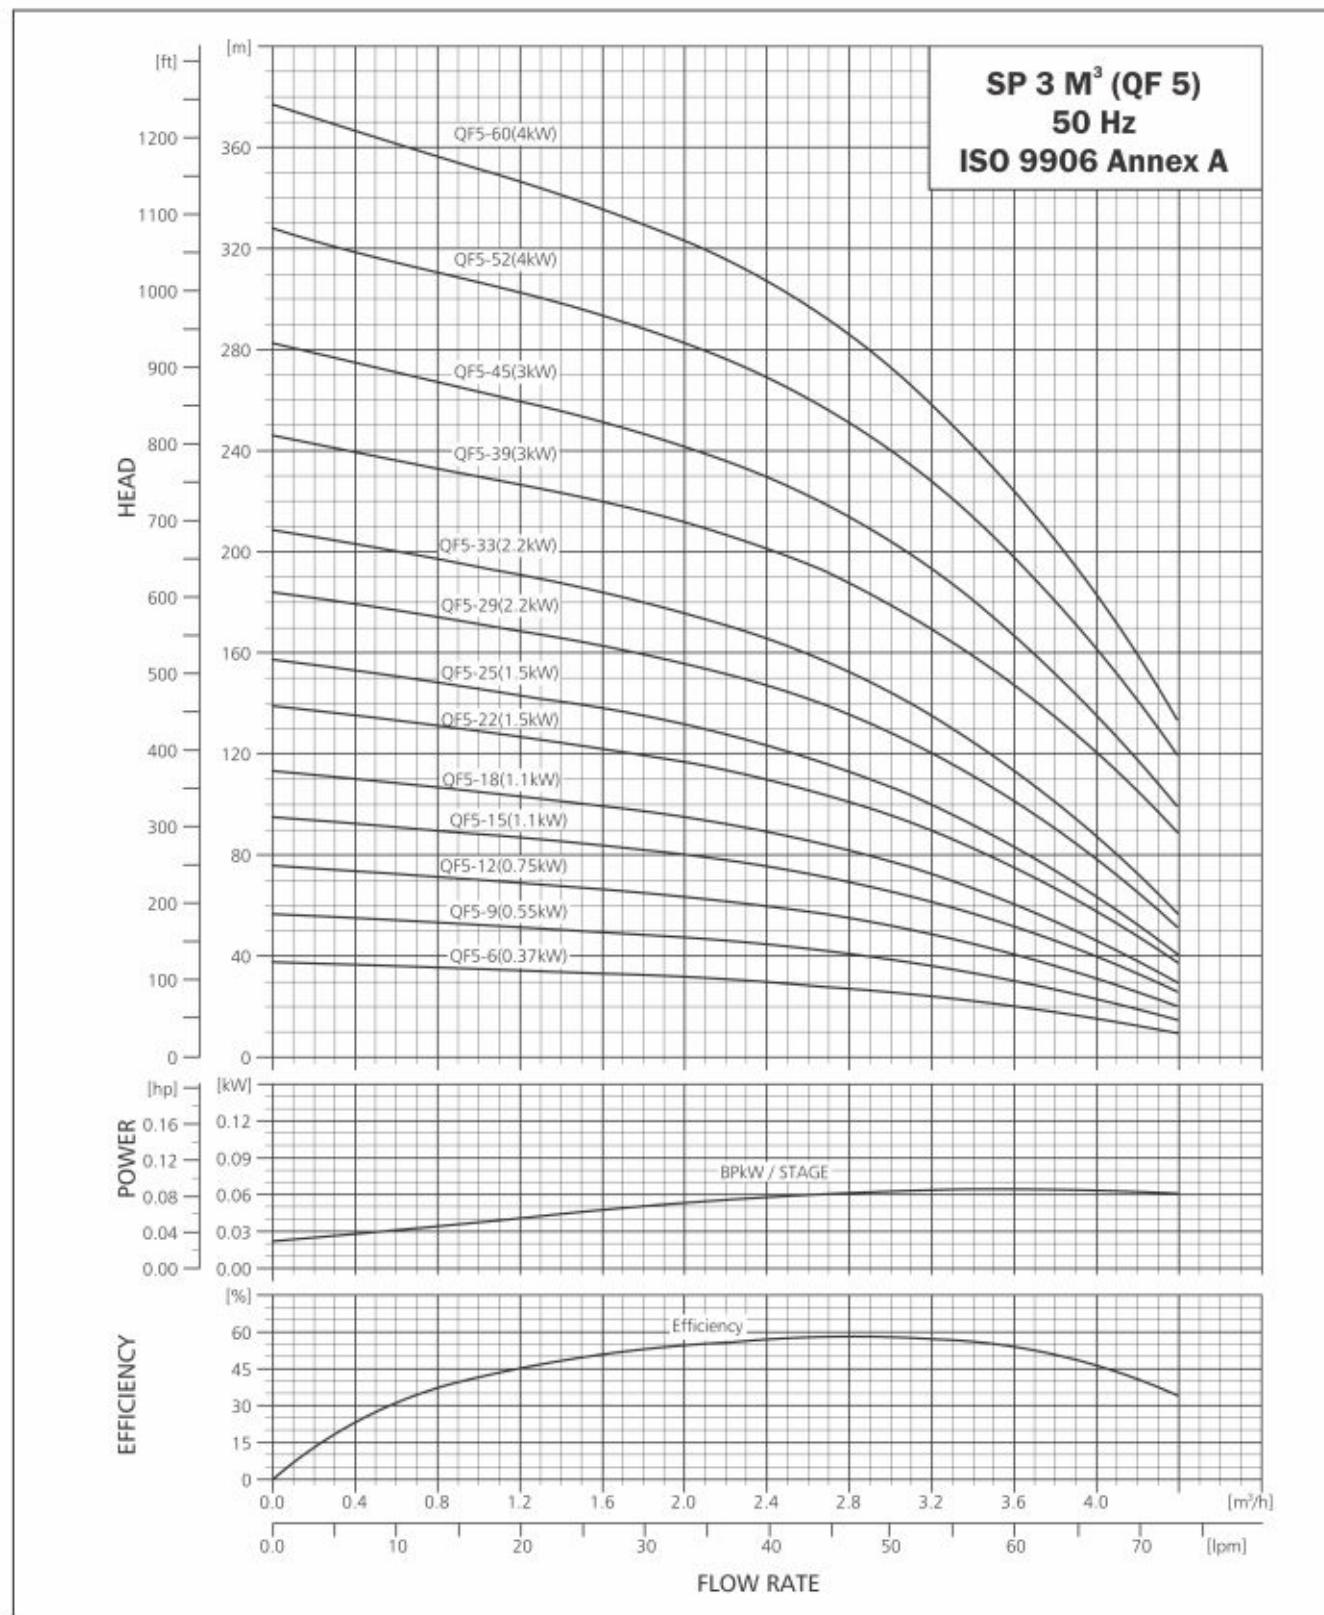

SUBMERSIBLE PUMP QF 5

DIMENSIONS AND WEIGHTS

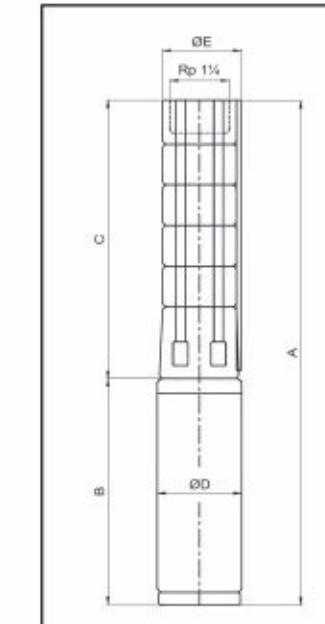

E = Maximum Dia of Pump inclusive of cable guard and motor.

TECHNICAL DATA QF 5

PUMP TYPE	MOTOR		C	DIMENSIONS (MM)				NET WEIGHT (KG)			
	TYPE	POWER (kW)		B		A		D	E	PUMP	
				1x230V	3x220V 3x400V	1x230V	3x220V 3x400V				
QF 5-6	PREMIUM 100	0.37	309	242	-	551	-	95	101	3 9 -	
QF 5-9	PREMIUM 100	0.55	372	271	242	643	614	95	101	4 10 9	
QF 5-12	PREMIUM 100	0.75	435	292	271	727	706	95	101	5 11 10	
QF 5-15	PREMIUM 100	1.1	498	340	292	838	790	95	101	5 13 11	
QF 5-18	PREMIUM 100	1.1	561	340	292	901	853	95	101	6 13 11	
QF 5-22	PREMIUM 100	1.5	645	405	340	1050	985	95	101	7 15 13	
QF 5-25	PREMIUM 100	1.5	708	405	340	1113	1048	95	101	8 15 13	
QF 5-29	PREMIUM 100	2.2	792	482	405	1274	1197	95	101	9 17 15	
QF 5-33	PREMIUM 100	2.2	876	482	405	1358	1281	95	101	10 17 15	
QF 5-39	PREMIUM 100	3.0	1002	-	480	-	1482	95	101	11 - 17	
QF 5-45	PREMIUM 100	3.0	1128	-	482	-	1610	95	101	13 - 17	
QF 5-52	PREMIUM 101	4.0	1275	-	693	-	1968	95	101	14 - 29	
QF 5-60	PREMIUM 101	4.0	1443	-	693	-	2136	95	101	16 - 29	

* Motor type may change as per requirement.


PERFORMANCE TABLE QF 5

QF-5				DISCHARGE (Q)								TOTAL HEAD IN (m)							
MODEL	CONNE-CTION	MATERIAL CODE		MOTOR RATING	I-		3~		TOTAL HEAD IN (m)								DISCHARGE (Q)		
		(4X4)	(6X4)		[kW]	[HP]	[A]	[A]	0	1	1.4	1.8	2	2.4	2.8	4	5	8	
QF5-6	Rp 1½	9000002539	-	0.37	0.5	2.9	1.4	38	35	34	32	31	30	27	22	15	10		
QF5-9	Rp 1½	9000002542	-	0.55	0.75	4	2.2	57	54	51	49	47	45	41	33	23	15		
QF5-12	Rp 1½	9000002524	-	0.75	1	5.5	2.3	76	70	68	65	64	60	55	45	31	20		
QF5-15	Rp 1½	9000002525	-	1.1	1.5	8.2	3.4	95	87	85	82	80	76	70	57	40	27		
QF5-18	Rp 1½	9000002526	-	1.1	1.5	8.2	3.4	113	105	101	97	95	89	82	67	46	30		
QF5-22	Rp 1½	9000002527	-	1.5	2.0	10.2	4.2	139	129	125	120	117	110	101	83	57	37		
QF5-25	Rp 1½	9000002529	-	1.5	2.0	10.2	4.2	157	145	140	135	131	124	113	92	63	41		
QF5-29	Rp 1½	9000002530	-	2.2	3.0	14	5.5	184	171	166	159	156	147	136	111	78	52		
QF5-33	Rp 1½	9000002534	-	2.2	3.0	14	5.5	209	194	187	180	176	166	152	125	87	58		
QF5-39	Rp 1½	9000002535	-	3.0	4.0	-	7.9	246	230	223	216	212	201	188	160	120	89		
QF5-45	Rp 1½	9000002536	-	3.0	4.0	-	7.9	283	264	255	247	242	229	214	181	135	99		
QF5-52	Rp 1½	9000002538	9000013541	4.0	5.5	-	9.6	328	308	298	289	283	269	251	214	161	120		
QF5-60	Rp 1½	9000002540	9000013542	4.0	5.5	-	9.6	377	350	341	330	323	307	286	242	182	135		

PERFORMANCE CURVE


TECHNICAL DATA

SUBMERSIBLE PUMP QF 6

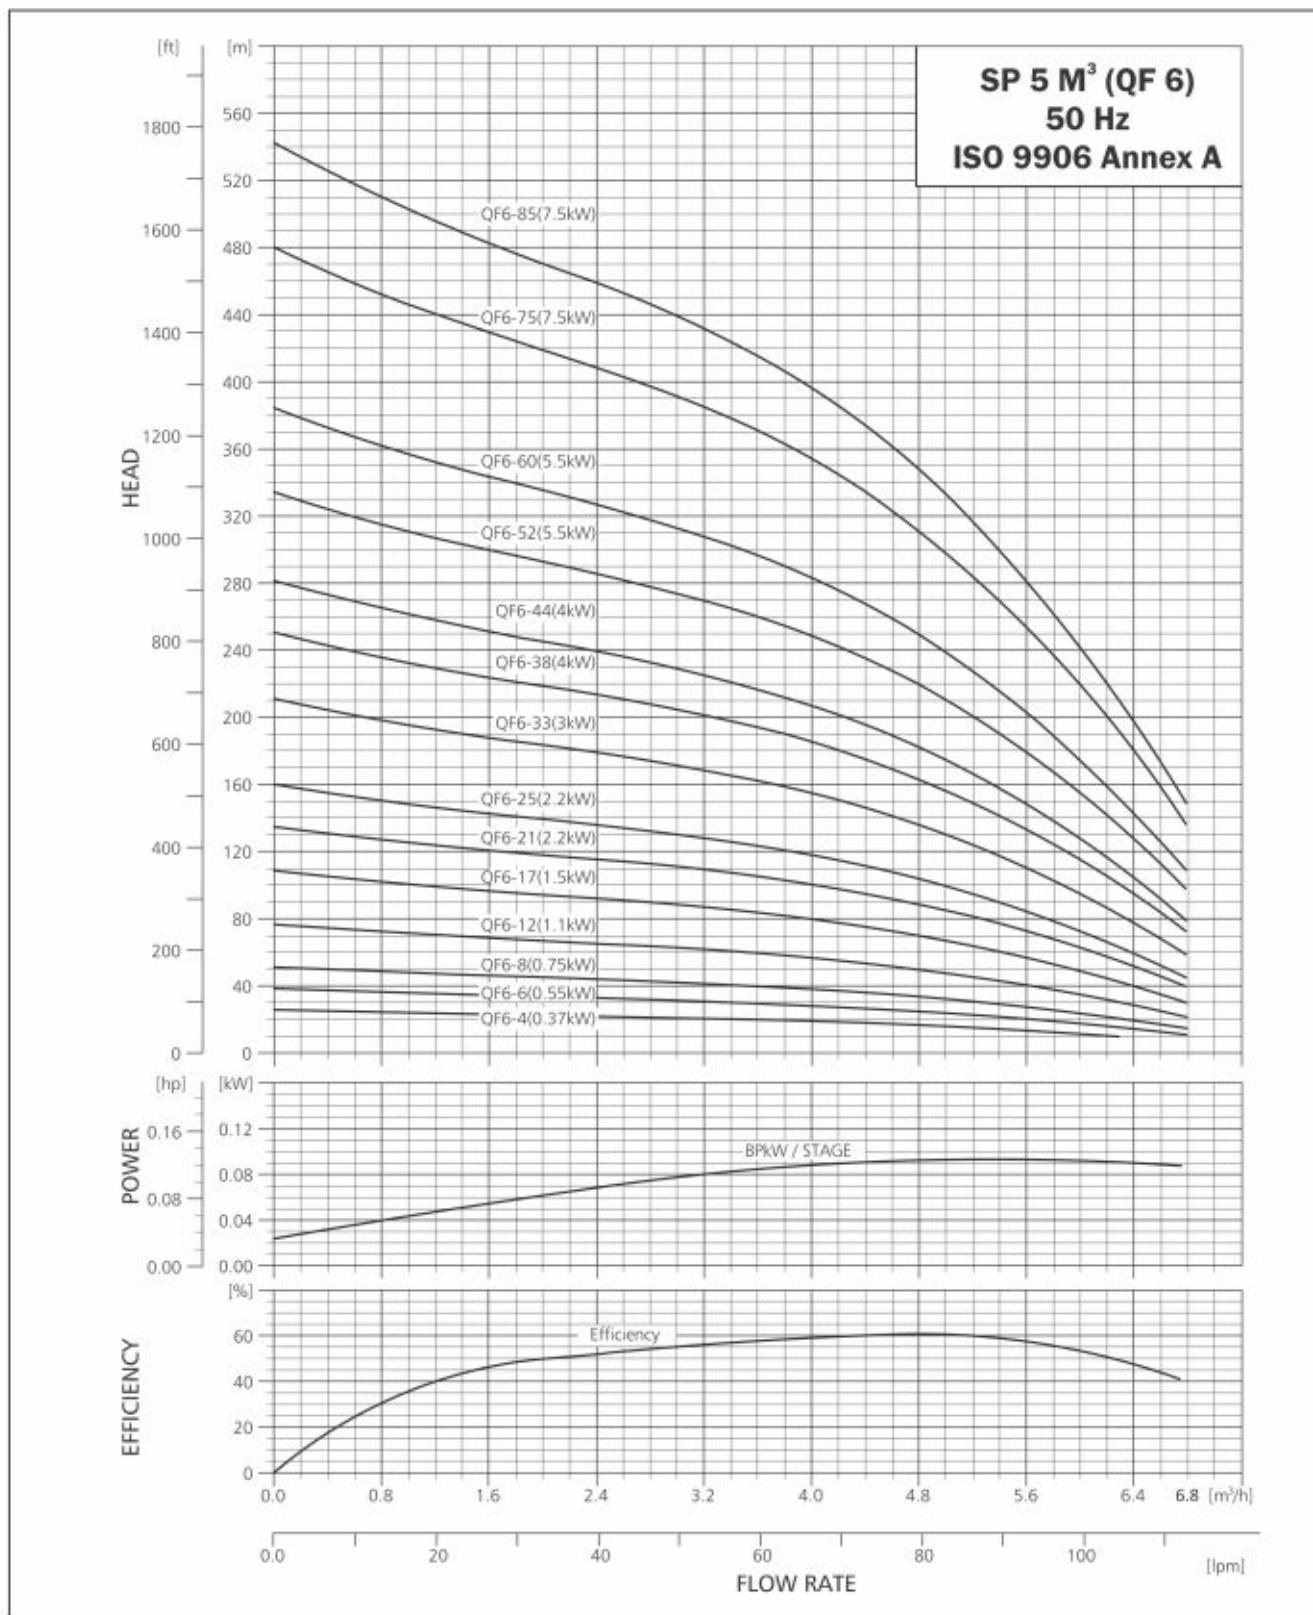

SUBMERSIBLE PUMP QF 6

DIMENSIONS AND WEIGHTS

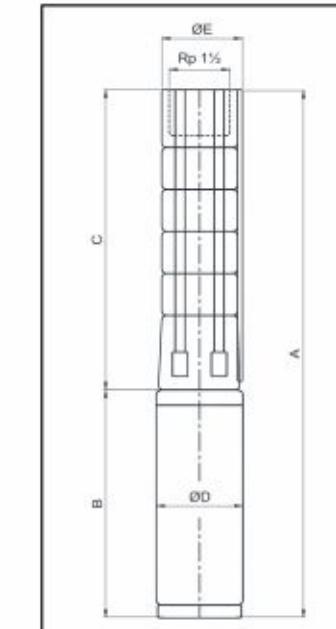

E = Maximum diameter of pump inclusive of cable guard & motor.

QF 6-75 to QF 2-85 are mounted in sleeve for Rp 1½" connection and with max. diameter 108 mm.

TECHNICAL DATA QF 6

PUMP TYPE	MOTOR		C	DIMENSIONS (MM)				NET WEIGHT (KG)			
	TYPE	POWER (kW)		B		A		D	E	PUMP	
				1x230V	3x220V 3x400V	1x230V	3x220V 3x400V				
QF 6-4	PREMIUM100	0.37	267	242	-	509	-	95	97	3 9	
QF 6-6	PREMIUM100	0.55	309	271	242	580	551	95	97	3 10 9	
QF 6-8	PREMIUM100	0.75	351	292	271	643	622	95	97	4 11 10	
QF 6-12	PREMIUM100	1.1	435	340	292	775	727	95	97	5 13 11	
QF 6-17	PREMIUM100	1.5	540	405	340	945	880	95	97	6 15 13	
QF 6-21	PREMIUM100	2.2	624	482	405	1106	1029	95	97	7 17 15	
QF 6-25	PREMIUM100	2.2	708	482	405	1190	1113	95	97	8 17 15	
QF 6-33	PREMIUM100	3	876	-	482	-	1358	95	97	10 - 17	
QF 6-38	PREMIUM101	4	981	693	-	1674	-	95	97	11 29 -	
QF 6-44	PREMIUM101	4	1107	693	-	1800	-	95	97	12 29 -	
QF 6-52	PREMIUM101	5.5	1275	-	693	-	1968	95	97	14 - 29	
QF 6-60	PREMIUM101	5.5	1443	-	693	-	2136	95	97	16 - 29	
QF 6-75	PREMIUM101	7.5	1758	-	770	-	2528	95	97	20 - 33	
QF 6-85	PREMIUM101	7.5	1968	-	770	-	2738	95	97	22 - 33	
QF 6-52	MATASF150	5.5	1275	-	699	-	1974	145	143	14 - 48	
QF 6-60	MATASF150	5.5	1443	-	699	-	2142	145	143	16 - 48	
QF 6-75	MATASF150	7.5	1758	-	719	-	2477	145	143	20 - 50	
QF 6-85	MATASF150	7.5	1968	-	719	-	2687	145	143	22 - 50	

* Motor type may change as per requirement.


PERFORMANCE TABLE QF 6

QF-6				DISCHARGE (Q)																
				m ³ /h	0	1	1.4	1.8	2	2.4	2.8	3.4	4	4.4	5	6	6.8			
MODEL	CONNE-CTION	MATERIAL CODE	MOTOR RATING	I-	3-	TOTAL HEAD IN (m)														
		4x4	6x4	[kW]	[HP]	[A]	[A]	[A]	[A]	[A]	[A]	[A]	[A]	[A]	[A]	[A]				
QF6-4		9000002563	-	0.37	0.5	2.9	1.4	26	24	23	23	22	22	21	20	19	18	16	11	9
QF6-6		9000002567	-	0.55	0.75	4	2.2	38	36	35	34	33	33	32	30	28	26	24	17	11
QF6-8		9000002573	-	0.75	1	5.5	2.3	51	48	47	46	45	44	43	40	38	36	32	23	15
QF6-12		9000002553	-	1.1	1.5	8.2	3.4	77	72	70	68	67	65	63	60	56	54	47	35	21
QF6-17		9000002554	-	1.5	2	10.2	4.2	109	100	97	96	94	92	90	85	80	75	67	49	30
QF6-21		9000002557	-	2.2	3	14	5.5	135	126	122	120	118	115	112	106	100	95	85	63	39
QF6-25	Rp1½	9000002558	-	2.2	3	14	5.5	160	150	145	141	139	135	131	125	118	112	99	72	45
QF6-33		9000002561	-	3	4	-	7.9	211	195	190	186	183	179	173	166	155	148	130	95	59
QF6-38		9000002562	90000011562	4	5.5	-	9.6	250	233	229	221	219	215	209	199	186	177	157	115	72
QF6-44		9000002564	90000011577	4	5.5	-	9.6	281	260	257	250	245	240	232	220	207	195	174	127	79
QF6-52		9000002565	9000002566	5.5	7.5	-	13.6	334	310	302	296	293	285	280	267	249	238	210	155	98
QF6-60		9000002568	9000002569	5.5	7.5	-	13.6	384	360	345	339	335	325	319	303	283	269	238	175	108
QF6-75		-	90000014918	7.5	10	-	-	480	450	431	424	418	405	397	379	353	337	300	212	138
QF6-85		-	9000002575	7.5	10	-	-	544	510	488	480	473	459	450	430	400	382	340	240	150

PERFORMANCE CURVE


TECHNICAL DATA

SUBMERSIBLE PUMP QF 12

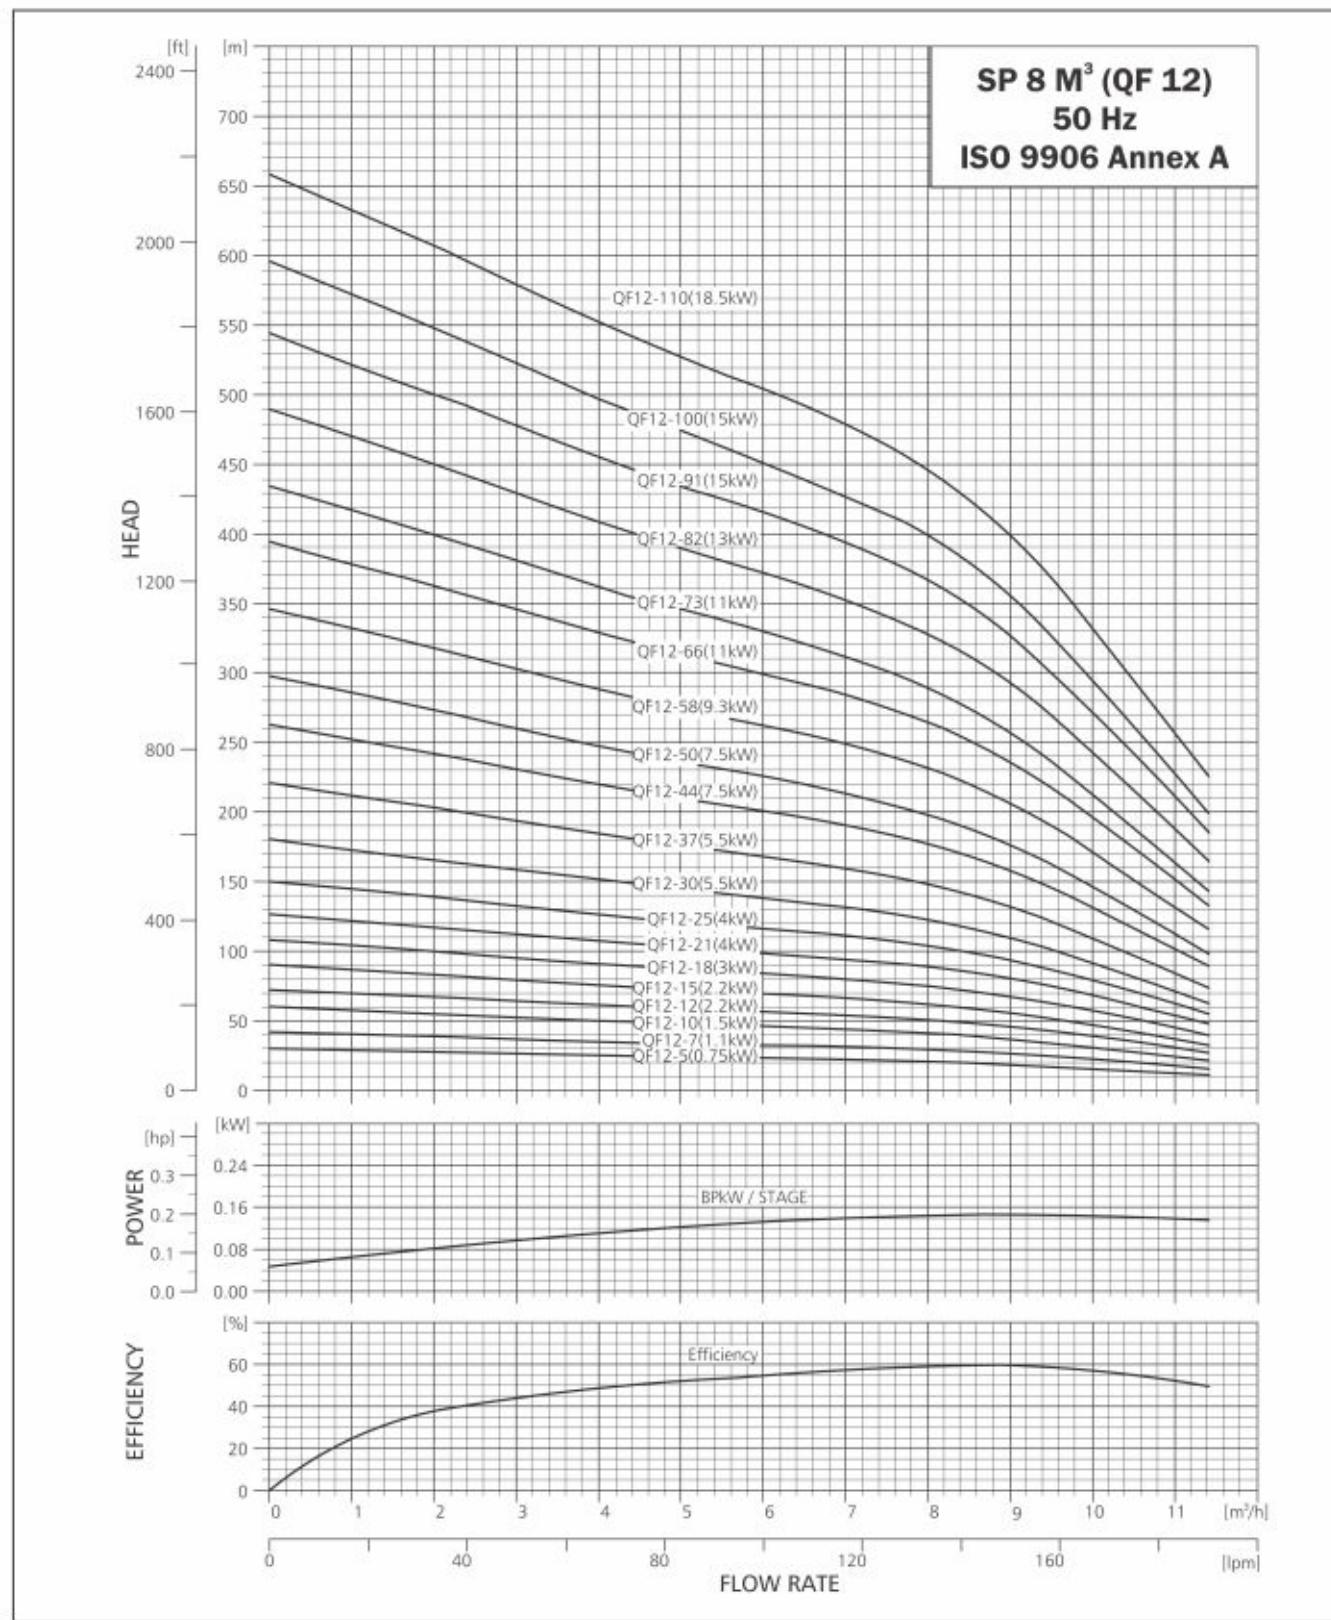

SUBMERSIBLE PUMP QF 12

DIMENSIONS AND WEIGHTS

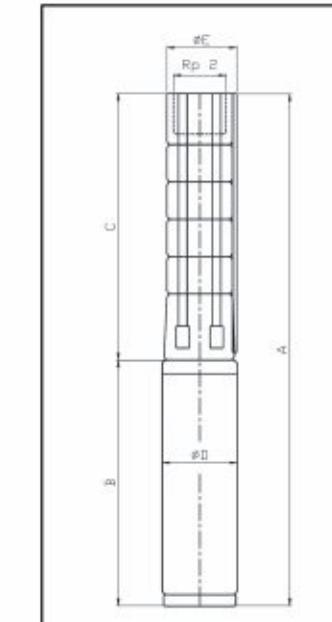

E = Maximum diameter of pump inclusive of cable guard & motor.

QF12 58 to QF12 110 are mounted in sleeve for R 2" connection

TECHNICAL DATA QF 12

PUMP TYPE	MOTOR		DIMENSIONS (MM)				NET WEIGHT (KG)					
	TYPE	POWER (kW)	C	B		A		D	E	PUMP	MOTOR	
				1x230V	3x220V 3x400V	1x230V	3x220V 3x400V				1x230V	
QF12-5	4"PREMIUM 100	0.75	415	292	271	707	686	95	101	4	11	10
QF12-7	4"PREMIUM 100	1.1	499	340	292	839	791	95	101	5	13	11
QF12-10	4"PREMIUM 100	1.5	625	405	340	1030	965	95	101	6	15	13
QF12-12	4"PREMIUM 100	2.2	709	482	405	1191	1114	95	101	7	17	15
QF12-15	4"PREMIUM 100	2.2	835	482	405	1317	1240	95	101	9	17	15
QF12-18	4"PREMIUM 100	3	961	-	482	-	1443	95	101	10	-	17
QF12-21	4"PREMIUM 101	4	1087	-	579	-	1666	95	101	11	-	23
QF12-25	4"PREMIUM 101	4	1255	-	579	-	1834	95	101	13	-	23
QF12-30	4"PREMIUM 101	5.5	1465	-	693	-	2158	95	101	15	-	29
QF12-37	4"PREMIUM 101	5.5	1759	-	693	-	2452	95	101	18	-	29
QF12-44	4"PREMIUM 101	7.5	2053	-	770	-	2823	95	101	21	-	33
QF12-50	4"PREMIUM 101	7.5	2305	-	770	-	3075	95	101	24	-	33
QF12-30	6"MTSF	5.5	1465	-	699	-	2164	143	145	15	-	48
QF12-37	6"MTSF	5.5	1759	-	699	-	2458	143	145	18	-	48
QF12-44	6"MTSF	7.5	2053	-	719	-	2772	143	145	21	-	50
QF12-50	6"MTSF	7.5	2305	-	719	-	3024	143	145	24	-	50
QF12-58	6"MTSF	9.3	2641	-	749	-	3390	143	145	27	-	53
QF12-66	6"MTSF	11	2977	-	779	-	3756	143	145	31	-	53
QF12-73	6"MTSF	11	3271	-	779	-	4050	143	145	34	-	56
QF12-82	6"MTSF	13	3649	-	829	-	4478	143	145	38	-	61
QF12-91	6"MTSF	15	4027	-	874	-	4901	143	145	42	-	66
QF12-100	6"MTSF	15	4405	-	874	-	5279	143	143	45	-	66
QF12-110	6"MTSF	18.5	4825	-	919	-	5744	143	143	50	-	70

* Motor type may change as per requirement.


PERFORMANCE TABLE QF 12

QF-12				DISCHARGE (Q)													
				m ³ /h	0	1.4	2	4	6	8	9	10	11				
MODEL	CONNE-CTION	MATERIAL CODE		MOTOR RATING	I~ 3~		TOTAL HEAD IN (m)										
		6x4	4x4		[kW]	[HP]	[A]	[A]	30	29	27	25	23	21	19	16	12
		9000002616	-	0.75	1.0	5.5	2.3	-	30	29	27	25	23	21	19	16	12
		9000002626	-	1.1	1.5	8.2	3.4	42	40	38	35	32	29	26	22	17	
		9000002581	-	1.5	2.0	10.2	4.2	60	57	55	50	46	41	37	32	24	
		9000002585	-	2.2	3.0	14.0	5.5	72	68	68	61	57	51	46	39	31	
		9000002588	-	2.2	3.0	14.0	5.5	90	85	82	76	70	62	56	47	37	
		9000002592	-	3.0	4.0	-	7.9	108	102	100	91	84	75	67	57	45	
		9000002596	9000011469	4.0	5.5	-	9.6	127	120	117	107	99	89	80	68	53	
		9000002600	9000008265	4.0	5.5	-	9.6	150	142	139	126	116	104	94	79	62	
		9000002606	900002607	5.5	7.5	-	13.6	180	170	165	151	138	123	110	92	71	
		9000002609	9000002610	5.5	7.5	-	13.6	221	210	202	184	168	148	132	110	84	
		-	9000002614	7.5	10.0	-	-	264	246	238	220	202	185	167	141	106	
		-	9000002619	7.5	10.0	-	-	300	279	270	250	230	210	190	160	120	
		-	9000012044	9.3	12.5	-	-	348	324	314	290	266	244	220	186	140	
		-	9000002624	11	15.0	-	-	396	369	357	330	303	277	250	211	159	
		-	9000002627	11	15.0	-	-	438	408	395	365	335	307	277	234	176	
		-	9000002629	13.0	17.5	-	-	492	458	443	410	376	345	311	263	197	
		-	9000002631	15.0	20.0	-	-	546	509	492	455	418	383	345	292	219	
		-	9000002582	15.0	20.0	-	-	600	559	541	500	459	420	379	320	241	
		-	9000013726	18.5	25.0	-	-	660	615	595</							

PERFORMANCE CURVE


TECHNICAL DATA

SUBMERSIBLE PUMP QF 20

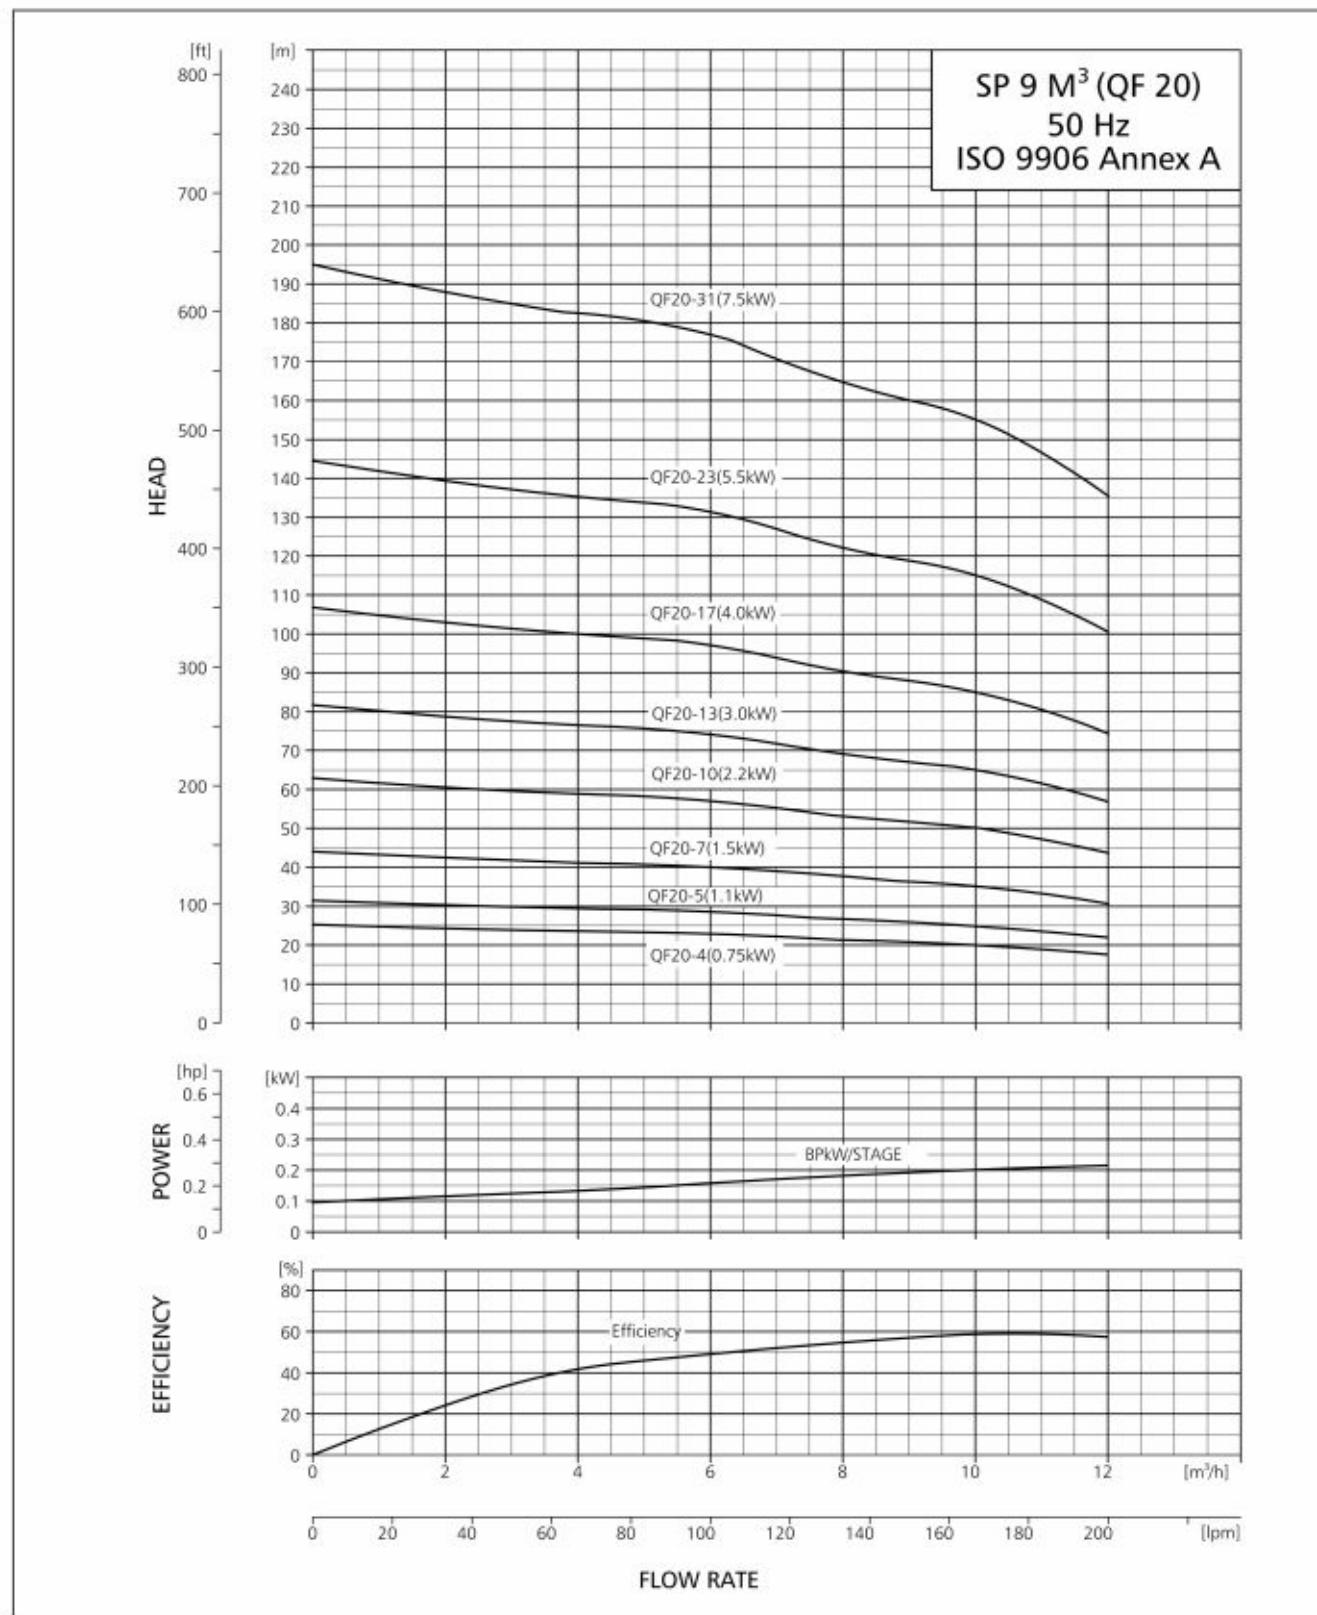

SUBMERSIBLE PUMP QF 20

DIMENSIONS AND WEIGHTS

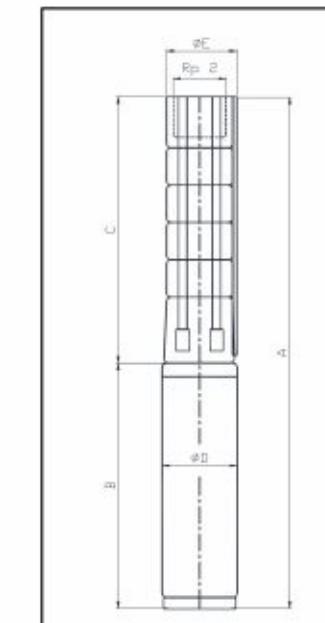

TECHNICAL DATA QF 20

PUMP TYPE	MOTOR		DIMENSIONS (MM)					NET WEIGHT (KG)		
	TYPE	POWER (kW)	C	B 1x230V 3x220V 3x400V	A 3x230V 3x400V	D	E	PUMP 1x230V 3x220V 3x400V	MOTOR 1x230V 3x220V 3x400V	
QF 20-4	PREMIUM 100	1.1	445	340	292	785	737	95	101	6
QF 20-5	PREMIUM 100	1.1	510	340	292	850	802	95	101	6
QF 20-7	PREMIUM 100	1.5	640	405	340	1045	980	95	101	7
QF 20-10	PREMIUM 100	2.2	835	482	405	1317	1240	95	101	8
QF 20-13	PREMIUM 100	3	1030	-	482	-	1512	95	101	11
QF 20-17	PREMIUM 101	4	1290	-	579	-	1869	95	101	14
QF 20-23	PREMIUM 101	5.5	1680	-	693	-	2373	95	101	19
QF 20-31	PREMIUM 101	7.5	2200	-	770	-	2970	95	101	24
QF 20-23	MATASF 150	5.5	1750	-	699	-	2449	145	143	19
QF 20-31	MATASF 150	7.5	2270	-	719	-	2989	145	143	24

* Motor type may change as per requirement.

E = Maximum diameter of pump inclusive of cable guard & motor.


PERFORMANCE TABLE QF 20

QF-20			DISCHARGE (Q)							
			m ³ /h	0	2	4	6	8	10	12
MODEL	CONNE-CTION	MATERIAL CODE	MOTOR RATING		TOTAL HEAD IN (m)					
			6x4	4x4	[kW]	[HP]				
QF 20 - 4	Rp2	9000002644	-	-	0.75	1	26	24	23	22
		9000011470	-	-	1.1	1.5	32	31	29	28
		9000011471	-	-	1.5	2	44	43	41	38
		9000011862	-	-	2.2	3	63	61	59	57
		9000011473	-	-	3	4	82	78	76	74
		9000011861	-	-	4	5.5	107	103	100	97
		9000011863	-	-	5.5	7.5	145	139	135	132
QF 20 - 31		9000011864	9000016485	7.5	10	195	188	182	177	165
										155
										135

PERFORMANCE CURVE


TECHNICAL DATA

SUBMERSIBLE PUMP QF 25

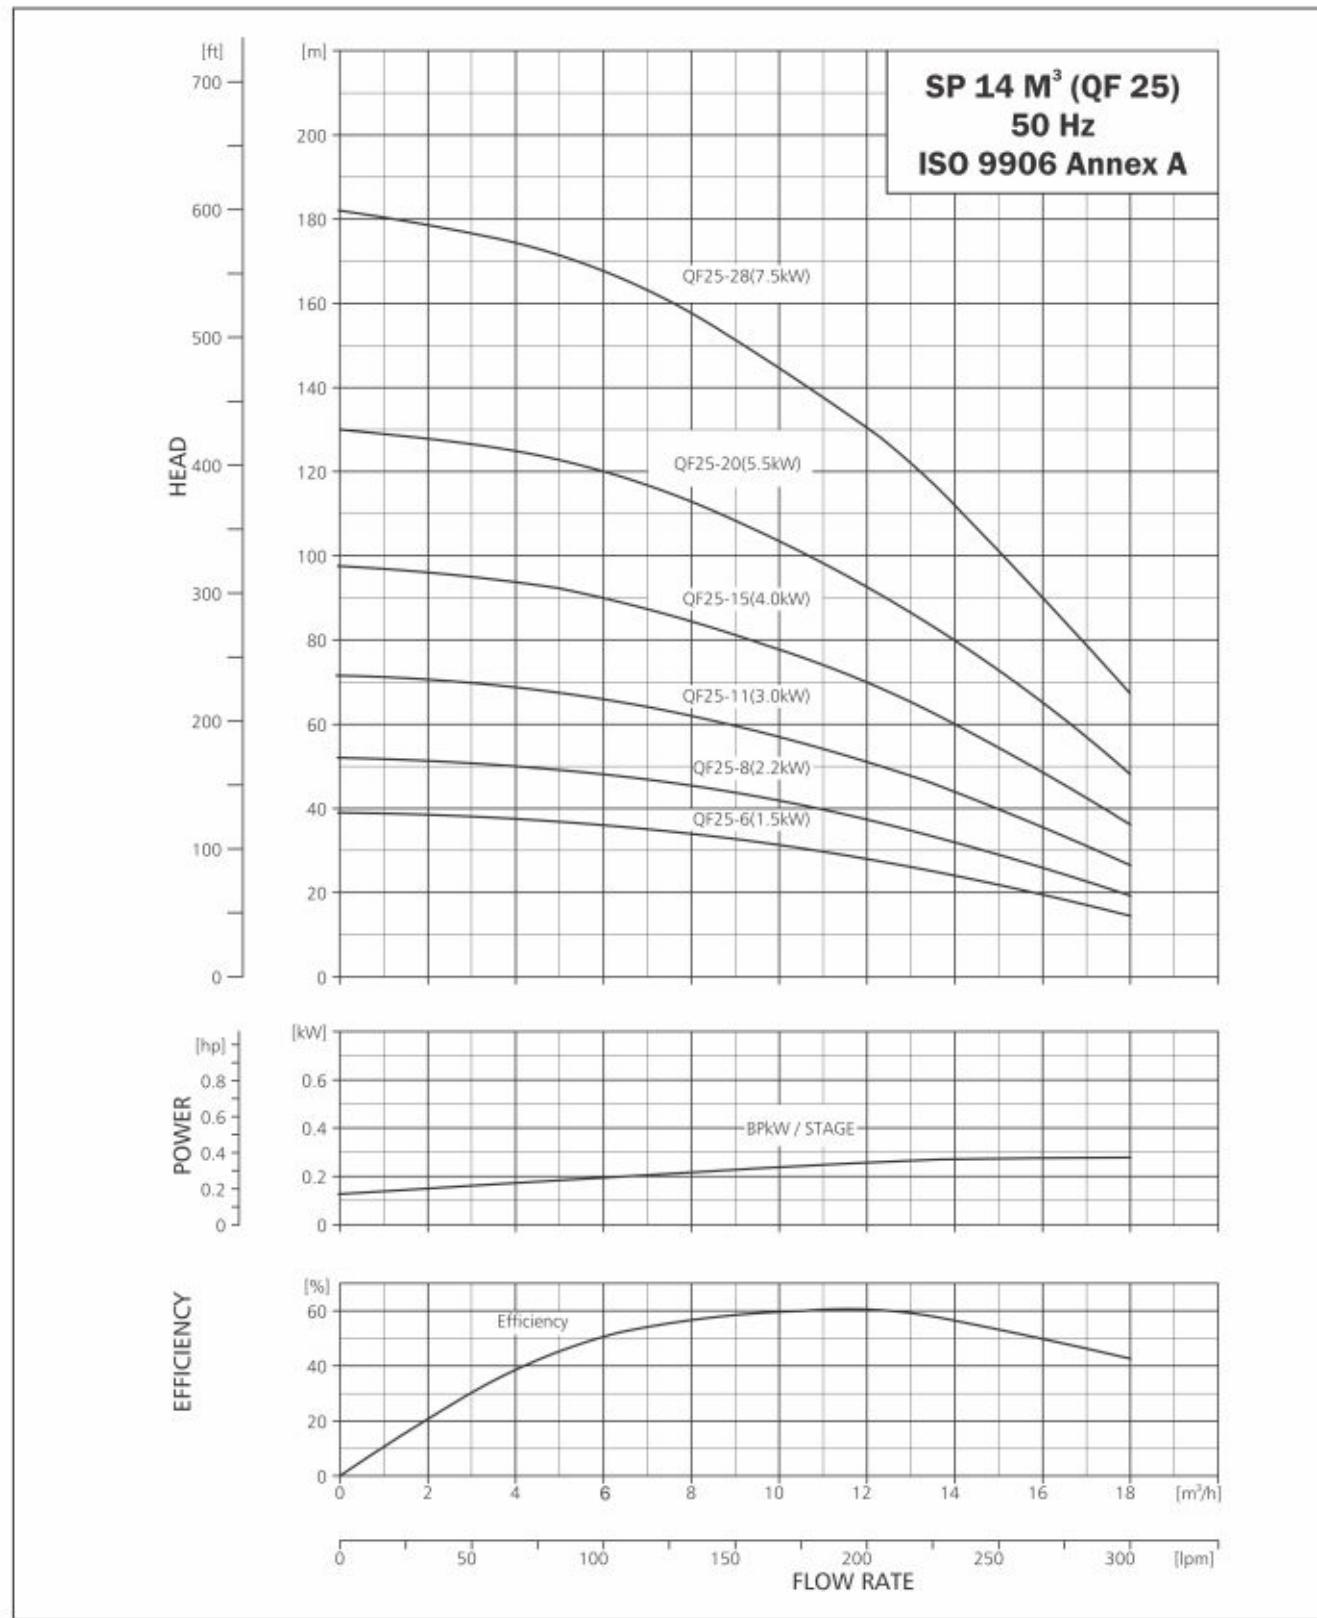

SUBMERSIBLE PUMP QF 25

DIMENSIONS AND WEIGHTS

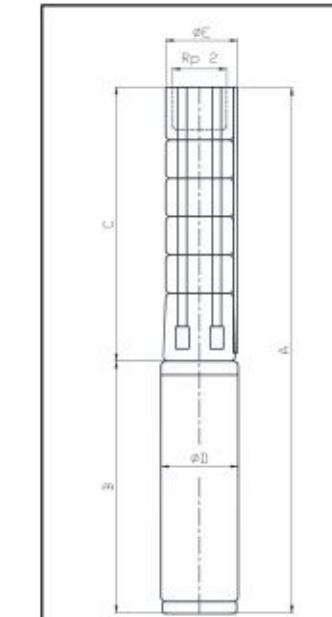

TECHNICAL DATA QF 25

PUMP TYPE	MOTOR		DIMENSIONS (MM)				NET WEIGHT (KG)					
	TYPE	POWER (kW)	C	B 1x230V 3x400V	A 3x220V 3x400V	D	E	PUMP 1x230V 3x400V	MOTOR 1x220V 3x400V			
QF 25-6	PREMIUM100	1.5	575	405	340	980	915	95	101	3	15	13
QF 25-8	PREMIUM100	2.2	705	482	405	1187	1110	95	101	4	17	15
QF 25-11	PREMIUM100	3	900	-	482	-	1382	95	101	4	-	17
QF 25-15	PREMIUM101	4	1160	-	579	-	1739	95	101	5	-	23
QF 25-20	PREMIUM101	5.5	1485	-	693	-	2178	95	101	7	-	29
QF 25-28	PREMIUM101	7.5	2005	-	770	-	2775	95	101	9	-	33
QF 25-20	MATASF150	5.5	1555	-	699	-	2254	145	143	7	-	48
QF 25-28	MATASF150	7.5	2075	-	719	-	2794	145	143	9	-	50


E = Maximum diameter of pump inclusive of cable guard & motor.

PERFORMANCE TABLE QF 25

QF-25			DISCHARGE (Q)										
			m ³ /h	0	6	9	11	12	14	18			
MODEL	CONNE-CTION	Rp 2	MATERIAL CODE		MOTOR RATING		TOTAL HEAD IN (m)						
			6x4	4x4	[kW]	[HP]	0	100.2	150	183.7	200.4	233.8	300.6
QF 25 - 6			9000011848	-	1.5	2	39	36	32	29	28	24	14
QF 25 - 8			9000008189	-	2.2	3	52	48	42	39	37	32	19
QF 25 - 11			9000011850	-	3	4	72	66	58	54	51	44	26
QF 25 - 15			9000011852	-	4	5.5	98	90	82	74	70	60	36
QF 25 - 20			9000011854	9000012090	5.5	7.5	130	120	108	98	93	80	48
QF 25 - 28			9000011856	9000013213	7.5	10	182	168	152	137	131	112	67


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 10

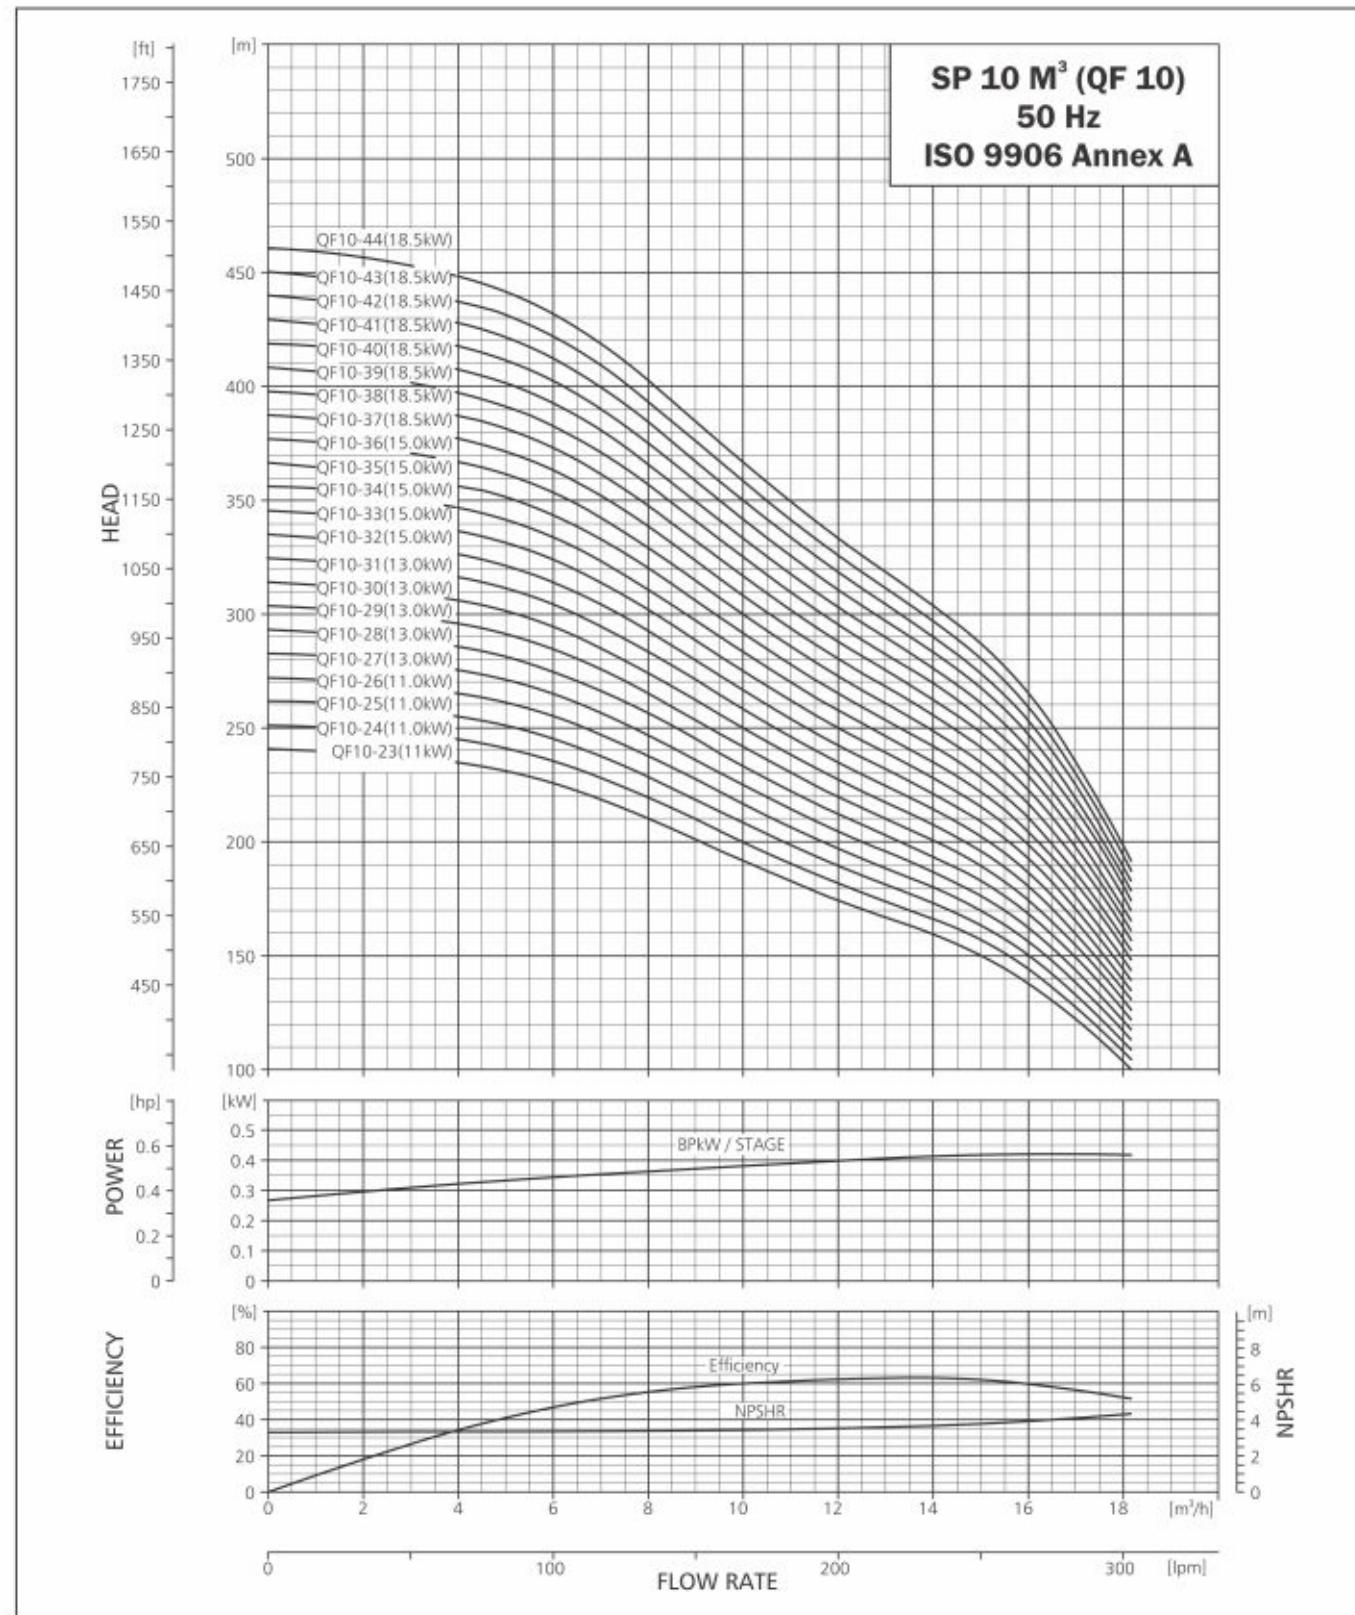

PERFORMANCE CURVE


SUBMERSIBLE PUMP QF 10

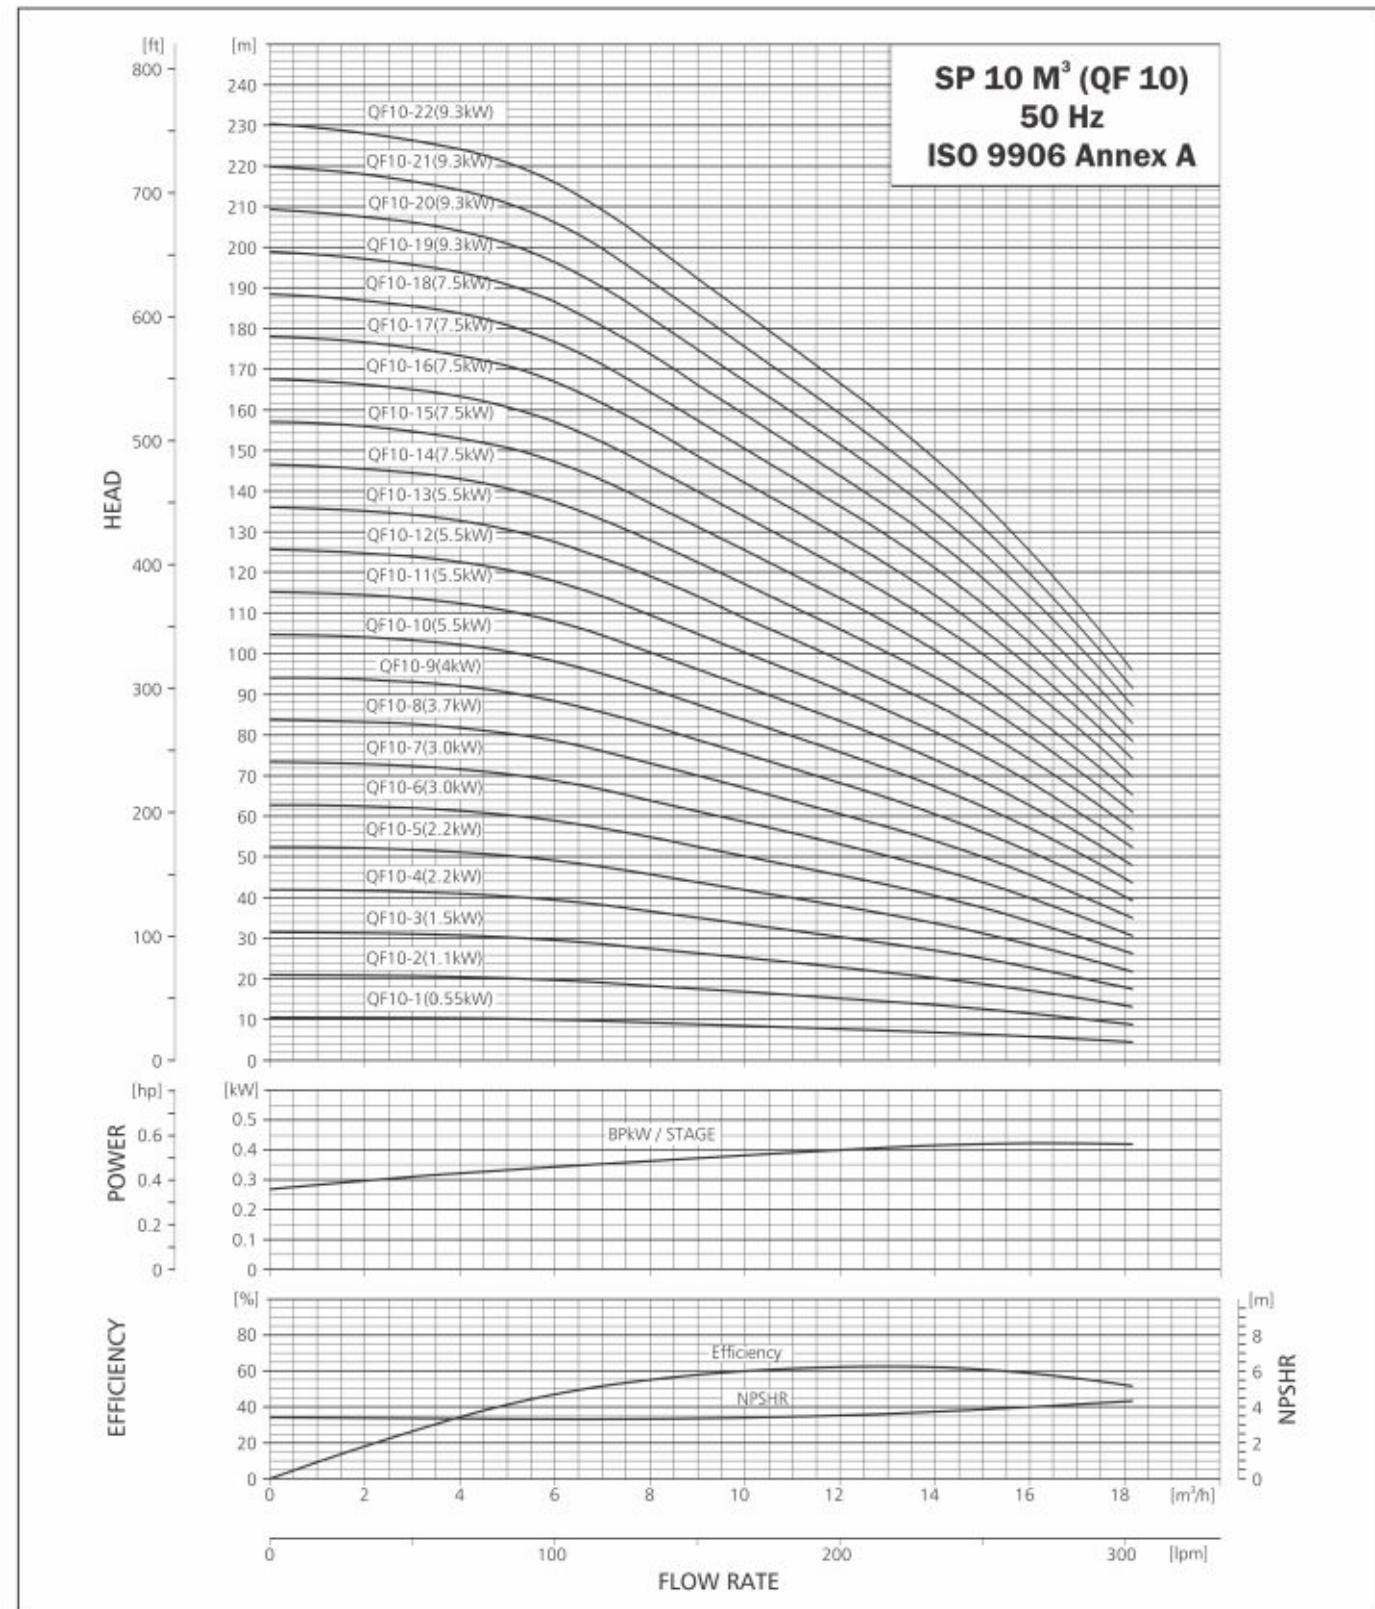

TECHNICAL DATA

SUBMERSIBLE PUMP QF 10

DIMENSIONS AND WEIGHTS

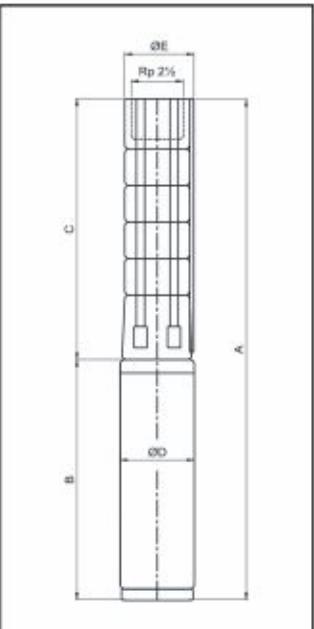

E = Maximum diameter of pump inclusive of cable guard & motor.

TECHNICAL DATA QF 10

PUMP TYPE	MOTOR		DIMENSIONS (MM)						NET WEIGHT (KG)				
	TYPE	POWER (kW)	C	B		A		D	E*	E**	MOTOR		
				1x230V 3x400V	3x220V 3x400V	1x230V 3x400V	3x220V 3x400V				1x230V	3x220V	
QF 10-1	PREMIUM 100	0.55	330	271	242	601	572	95	143	-	5	10	9
QF 10-2	PREMIUM 100	1.1	390	340	292	730	682	95	143	-	6	13	11
QF 10-3	PREMIUM 100	1.5	451	405	340	856	791	95	143	-	7	15	13
QF 10-4	PREMIUM 100	2.2	511	482	405	993	916	95	143	-	9	17	15
QF 10-5	PREMIUM 100	2.2	572	482	405	1054	977	95	143	-	10	17	15
QF 10-6	PREMIUM 100	3	632	-	482	-	1114	95	143	-	11	-	17
QF 10-7	PREMIUM 100	3	693	-	482	-	1175	95	143	-	12	-	17
QF 10-8	PREMIUM 101	3.7	753	693	-	1446	-	95	143	-	14	29	-
QF 10-9	PREMIUM 101	4	814	-	579	-	1393	95	143	-	15	-	23
QF 10-10	PREMIUM 101	5.5	874	-	693	-	1567	95	143	-	16	-	29
QF 10-11	PREMIUM 101	5.5	935	-	693	-	1628	95	143	-	17	-	29
QF 10-12	PREMIUM 101	5.5	995	-	693	-	1688	95	143	-	18	-	29
QF 10-13	PREMIUM 101	5.5	1056	-	693	-	1749	95	143	-	20	-	29
QF 10-14	PREMIUM 101	7.5	1116	-	770	-	1886	95	143	-	21	-	33
QF 10-15	PREMIUM 101	7.5	1177	-	770	-	1947	95	143	-	22	-	33
QF 10-16	PREMIUM 101	7.5	1237	-	770	-	2007	95	143	-	23	-	33
QF 10-17	PREMIUM 101	7.5	1298	-	770	-	2068	95	143	-	25	-	33
QF 10-18	PREMIUM 101	7.5	1358	-	770	-	2128	95	143	-	26	-	33
QF 10-12	MATASF 150	5.5	995	-	699	-	1694	143	145	-	18	-	48
QF 10-13	MATASF 150	5.5	1056	-	699	-	1755	143	145	-	20	-	48
QF 10-14	MATASF 150	7.5	1116	-	719	-	1835	143	145	145	21	-	50
QF 10-15	MATASF 150	7.5	1177	-	719	-	1896	143	145	145	22	-	50
QF 10-16	MATASF 150	7.5	1237	-	719	-	1956	143	145	145	23	-	50
QF 10-17	MATASF 150	7.5	1298	-	719	-	2017	143	145	145	25	-	50
QF 10-18	MATASF 150	7.5	1358	-	719	-	2077	143	145	145	26	-	50
QF 10-19	MATASF 150	9.3	1419	-	749	-	2168	143	145	145	27	-	53
QF 10-20	MATASF 150	9.3	1479	-	749	-	2228	143	145	145	28	-	53
QF 10-21	MATASF 150	9.3	1540	-	749	-	2289	143	145	145	29	-	53
QF 10-22	MATASF 150	9.3	1600	-	749	-	2349	143	145	145	31	-	53
QF 10-23	MATASF 150	11	1661	-	779	-	2440	143	145	145	32	-	56
QF 10-24	MATASF 150	11	1721	-	779	-	2500	143	145	145	33	-	56
QF 10-25	MATASF 150	11	1782	-	779	-	2561	143	145	145	34	-	56
QF 10-26	MATASF 150	11	1842	-	779	-	2621	143	145	145	36	-	56
QF 10-27	MATASF 150	13	1903	-	829	-	2732	143	145	145	37	-	61
QF 10-28	MATASF 150	13	1963	-	829	-	2792	143	145	145	38	-	61
QF 10-29	MATASF 150	13	2024	-	829	-	2853	143	145	145	39	-	61
QF 10-30	MATASF 150	13	2084	-	829	-	2913	143	145	145	41	-	61
QF 10-31	MATASF 150	13	2145	-	829	-	2974	143	145	145	42	-	61
QF 10-32	MATASF 150	15	2205	-	874	-	3079	143	145	145	43	-	66
QF 10-33	MATASF 150	15	2266	-	874	-	3140	143	145	145	44	-	66
QF 10-34	MATASF 150	15	2326	-	874	-	3200	143	145	145	45	-	66
QF 10-35	MATASF 150	15	2387	-	874	-	3261	143	145	145	47	-	66
QF 10-36	MATASF 150	15	2447	-	874	-	3321	143	145	145	48	-	66
QF 10-37	MATASF 150	18.5	2508	-	919	-	3427	143	145	145	49	-	70
QF 10-38	MATASF 150	18.5	2568	-	919	-	3487	143	145	145	50	-	70
QF 10-39	MATASF 150	18.5	2629	-	919	-	3548	143	145	145	52	-	70
QF 10-40	MATASF 150	18.5	2689	-	919	-	3608	143	145	145	53	-	70
QF 10-41	MATASF 150	18.5	2750	-	919	-	3669	143	145	145	54	-	70
QF 10-42	MATASF 150	18.5	2810	-	919	-	3729	143	145	145	55	-	70
QF 10-43	MATASF 150	18.5	2871	-	919	-	3790	143	145	145	57	-	70
QF 10-44	MATASF 150	18.5	2931	-	919	-	3850	143	145	145	58	-	70

* Motor type may change as per requirement .

TECHNICAL DATA

SUBMERSIBLE PUMP QF 10


PERFORMANCE TABLE QF 10

QF-10			MATERIAL CODE		MOTOR RATING		DISCHARGE (Q)																
m³/h		1/min.		0		2		4		6		8		10		12		14		16		18	
MODEL	CONNE- CTION	4x6	4x4	[kW]	[HP]	TOTAL HEAD IN (m)																	

<tbl_r cells="10" ix="4" maxcspan="1" maxrspan="


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 15

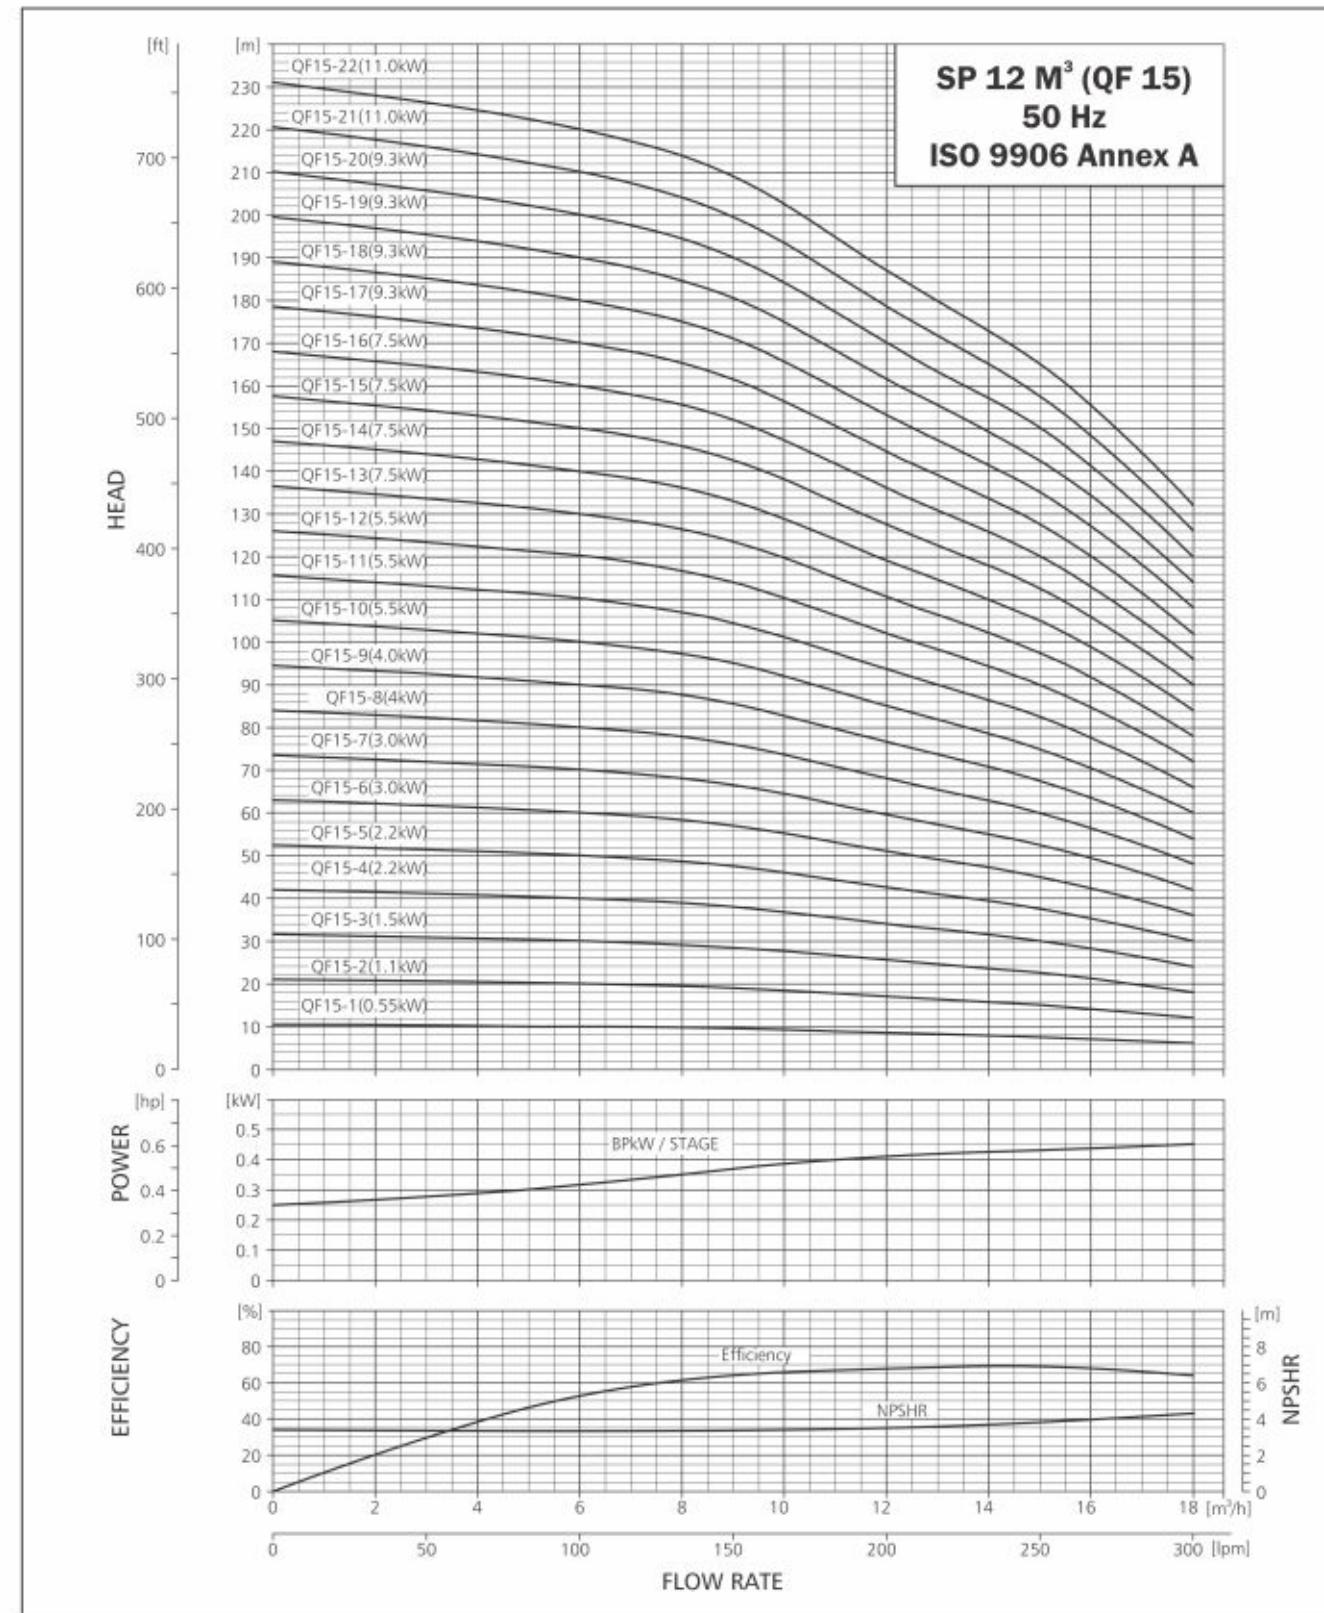

PERFORMANCE CURVE


SUBMERSIBLE PUMP QF 15

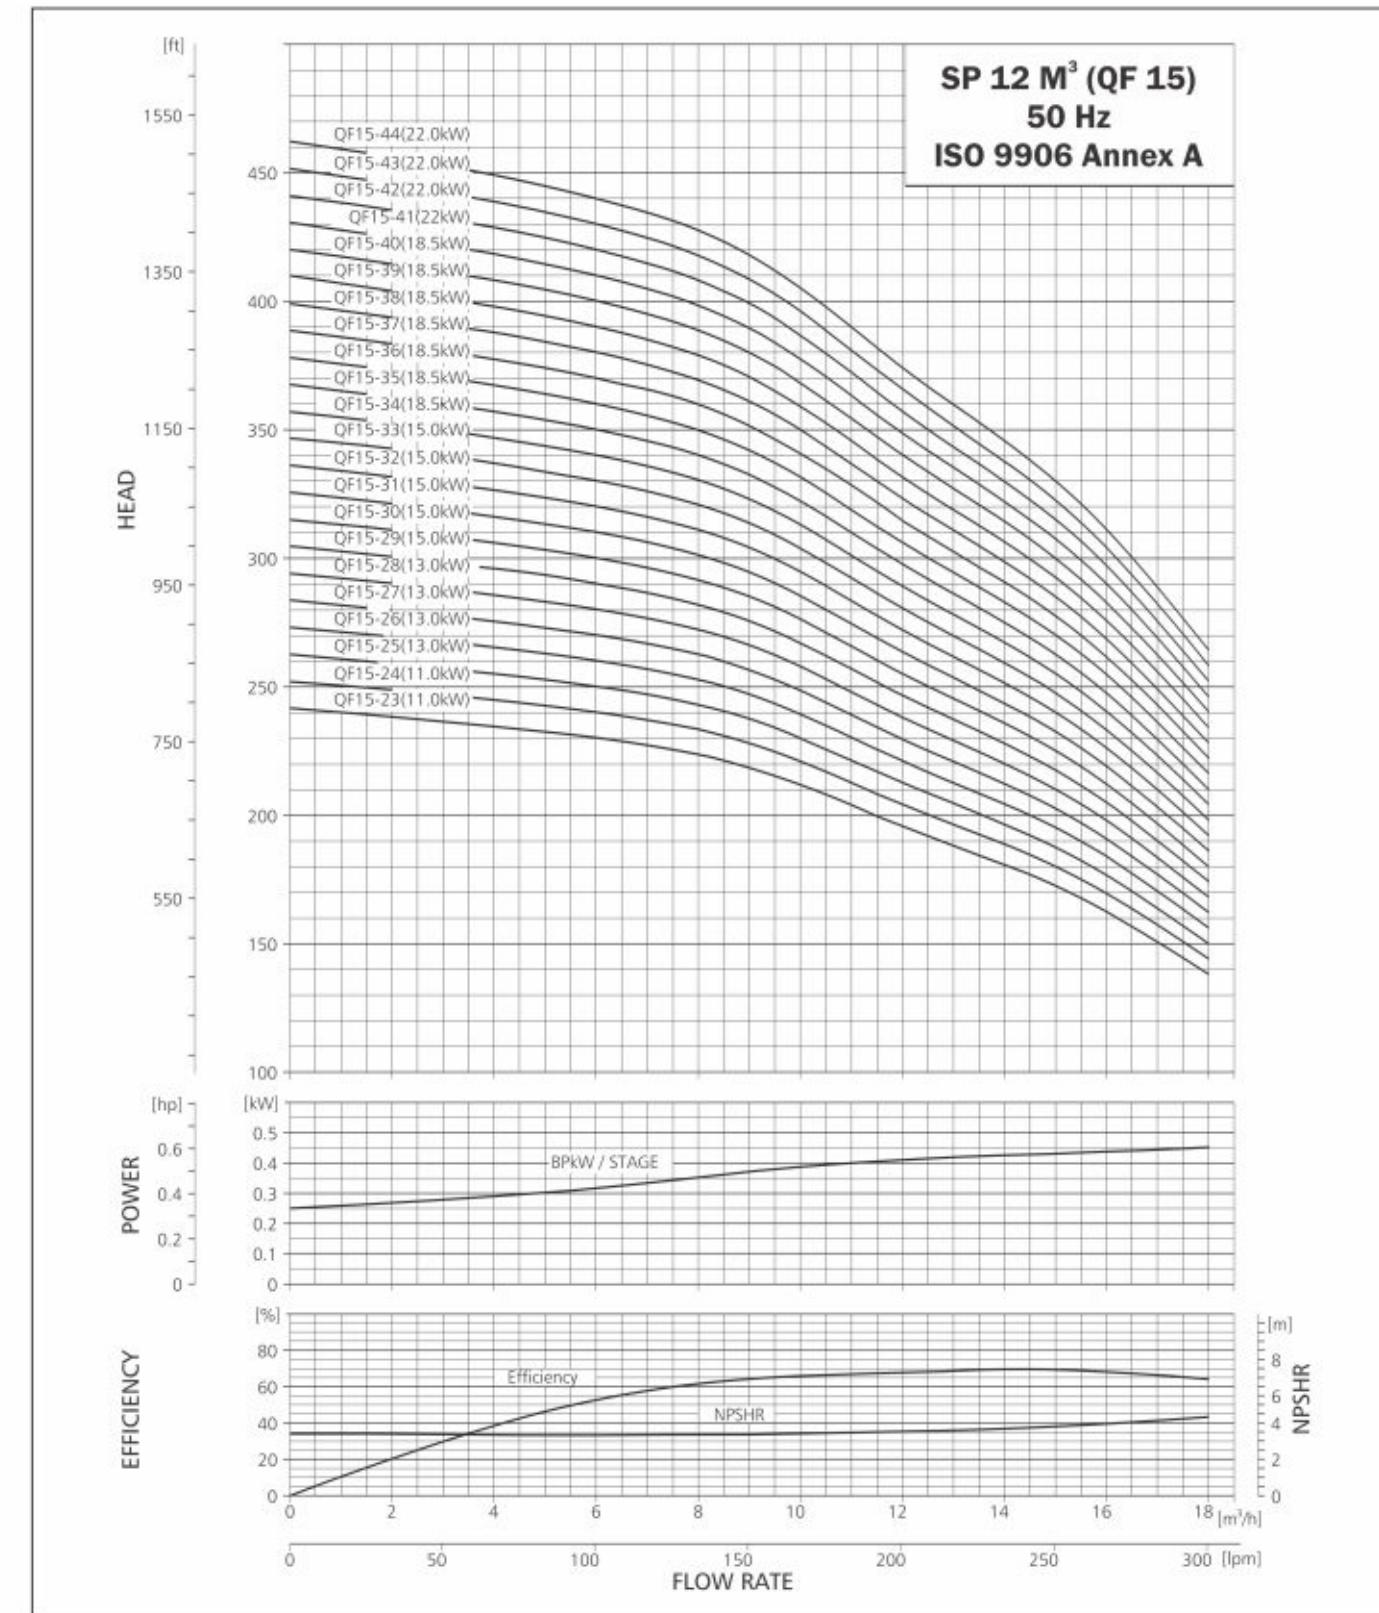

TECHNICAL DATA

SUBMERSIBLE PUMP QF 15

DIMENSIONS AND WEIGHTS

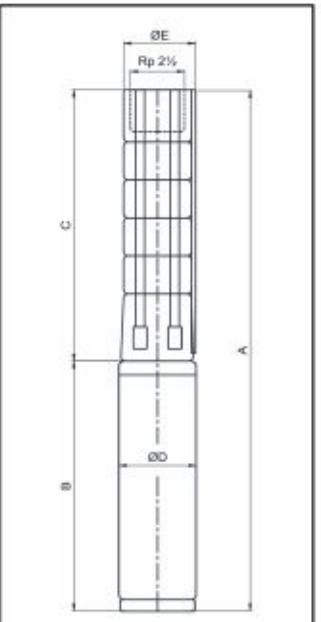

E = Maximum diameter of pump inclusive of cable guard & motor.

TECHNICAL DATA QF 15

PUMP TYPE	MOTOR		DIMENSIONS (MM)						NET WEIGHT (KG)				
	TYPE	POWER (kW)	C	B		A		D	E*	E**	MOTOR		
				1x230V 3x400V	3x220V 3x400V	1x230V 3x400V	3x220V 3x400V				1x230V	3x220V	
QF 15-1	PREMIUM 100	0.55	330	271	242	601	572	95	143	-	5	10	9
QF 15-2	PREMIUM 100	1.1	390	340	292	730	682	95	143	-	6	13	11
QF 15-3	PREMIUM 100	1.5	451	405	340	856	791	95	143	-	7	15	13
QF 15-4	PREMIUM 100	2.2	511	482	405	993	916	95	143	-	9	17	15
QF 15-5	PREMIUM 100	2.2	572	482	405	1054	977	95	143	-	10	17	15
QF 15-6	PREMIUM 100	3	632	-	482	-	1114	95	143	-	11	-	17
QF 15-7	PREMIUM 100	3	693	-	482	-	1175	95	143	-	12	-	17
QF 15-8	PREMIUM 101	4	753	-	579	-	1332	95	143	-	14	-	23
QF 15-9	PREMIUM 101	4	814	-	579	-	1393	95	143	-	15	-	23
QF 15-10	PREMIUM 101	5.5	874	-	693	-	1567	95	143	-	16	-	29
QF 15-11	PREMIUM 101	5.5	935	-	693	-	1628	95	143	-	17	-	29
QF 15-12	PREMIUM 101	5.5	995	-	693	-	1688	95	143	-	18	-	29
QF 15-13	PREMIUM 101	7.5	1056	-	770	-	1826	95	143	-	20	-	33
QF 15-14	PREMIUM 101	7.5	1116	-	770	-	1886	95	143	-	21	-	33
QF 15-15	PREMIUM 101	7.5	1177	-	770	-	1947	95	143	-	22	-	33
QF 15-16	PREMIUM 101	7.5	1237	-	770	-	2007	95	143	-	23	-	33
QF 15-11	MATASF 150	5.5	935	-	699	-	1634	145	143	-	17	-	48
QF 15-12	MATASF 150	5.5	995	-	699	-	1694	145	143	-	18	-	48
QF 15-13	MATASF 150	7.5	1056	-	719	-	1775	145	143	145	20	-	50
QF 15-14	MATASF 150	7.5	1116	-	719	-	1835	145	143	145	21	-	50
QF 15-15	MATASF 150	7.5	1177	-	719	-	1896	145	143	145	22	-	50
QF 15-16	MATASF 150	7.5	1237	-	719	-	1956	145	143	145	23	-	50
QF 15-17	MATASF 150	9.3	1298	-	749	-	2047	145	143	145	25	-	53
QF 15-18	MATASF 150	9.3	1358	-	749	-	2107	145	143	145	26	-	53
QF 15-19	MATASF 150	9.3	1419	-	749	-	2168	145	143	145	27	-	53
QF 15-20	MATASF 150	9.3	1479	-	749	-	2228	145	143	145	28	-	53
QF 15-21	MATASF 150	11	1540	-	779	-	2319	145	143	145	29	-	56
QF 15-22	MATASF 150	11	1600	-	779	-	2379	145	143	145	31	-	56
QF 15-23	MATASF 150	11	1661	-	779	-	2440	145	143	145	32	-	56
QF 15-24	MATASF 150	11	1721	-	779	-	2500	145	143	145	33	-	56
QF 15-25	MATASF 150	13	1782	-	829	-	2611	145	143	145	34	-	61
QF 15-26	MATASF 150	13	1842	-	829	-	2671	145	143	145	36	-	61
QF 15-27	MATASF 150	13	1903	-	829	-	2732	145	143	145	37	-	61
QF 15-28	MATASF 150	13	1963	-	829	-	2792	145	143	145	38	-	61
QF 15-29	MATASF 150	15	2024	-	874	-	2898	145	143	145	39	-	66
QF 15-30	MATASF 150	15	2084	-	874	-	2958	145	143	145	41	-	66
QF 15-31	MATASF 150	15	2145	-	874	-	3019	145	143	145	42	-	66
QF 15-32	MATASF 150	15	2205	-	874	-	3079	145	143	145	43	-	66
QF 15-33	MATASF 150	15	2266	-	874	-	3140	145	143	145	44	-	66
QF 15-34	MATASF 150	18.5	2326	-	919	-	3245	145	143	145	45	-	70
QF 15-35	MATASF 150	18.5	2387	-	919	-	3306	145	143	145	47	-	70
QF 15-36	MATASF 150	18.5	2447	-	919	-	3366	145	143	145	48	-	70
QF 15-37	MATASF 150	18.5	2508	-	919	-	3427	145	143	145	49	-	70
QF 15-38	MATASF 150	18.5	2568	-	919	-	3487	145	143	145	50	-	70
QF 15-39	MATASF 150	18.5	2629	-	919	-	3548	145	143	145	52	-	70
QF 15-40	MATASF 150	18.5	2689	-	919	-	3608	145	143	145	53	-	70
QF 15-41	MATASF 150	22	2750	-	1009	-	3759	145	143	145	54	-	79
QF 15-42	MATASF 150	22	2810	-	1009	-	3819	145	143	145	55	-	79
QF 15-43	MATASF 150	22	2871	-	1009	-	3880	145	143	145	57	-	79
QF 15-44	MATASF 150	22	2931	-	1009	-	3940	145	143	145	58	-	79

* Maximum diameter of pump with one motor cable.

** Maximum diameter of pump with two motor cable.

Motor type may change as per requirement.

TECHNICAL DATA




SUBMERSIBLE PUMP QF 15

PERFORMANCE TABLE QF 15

<table border="


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 30

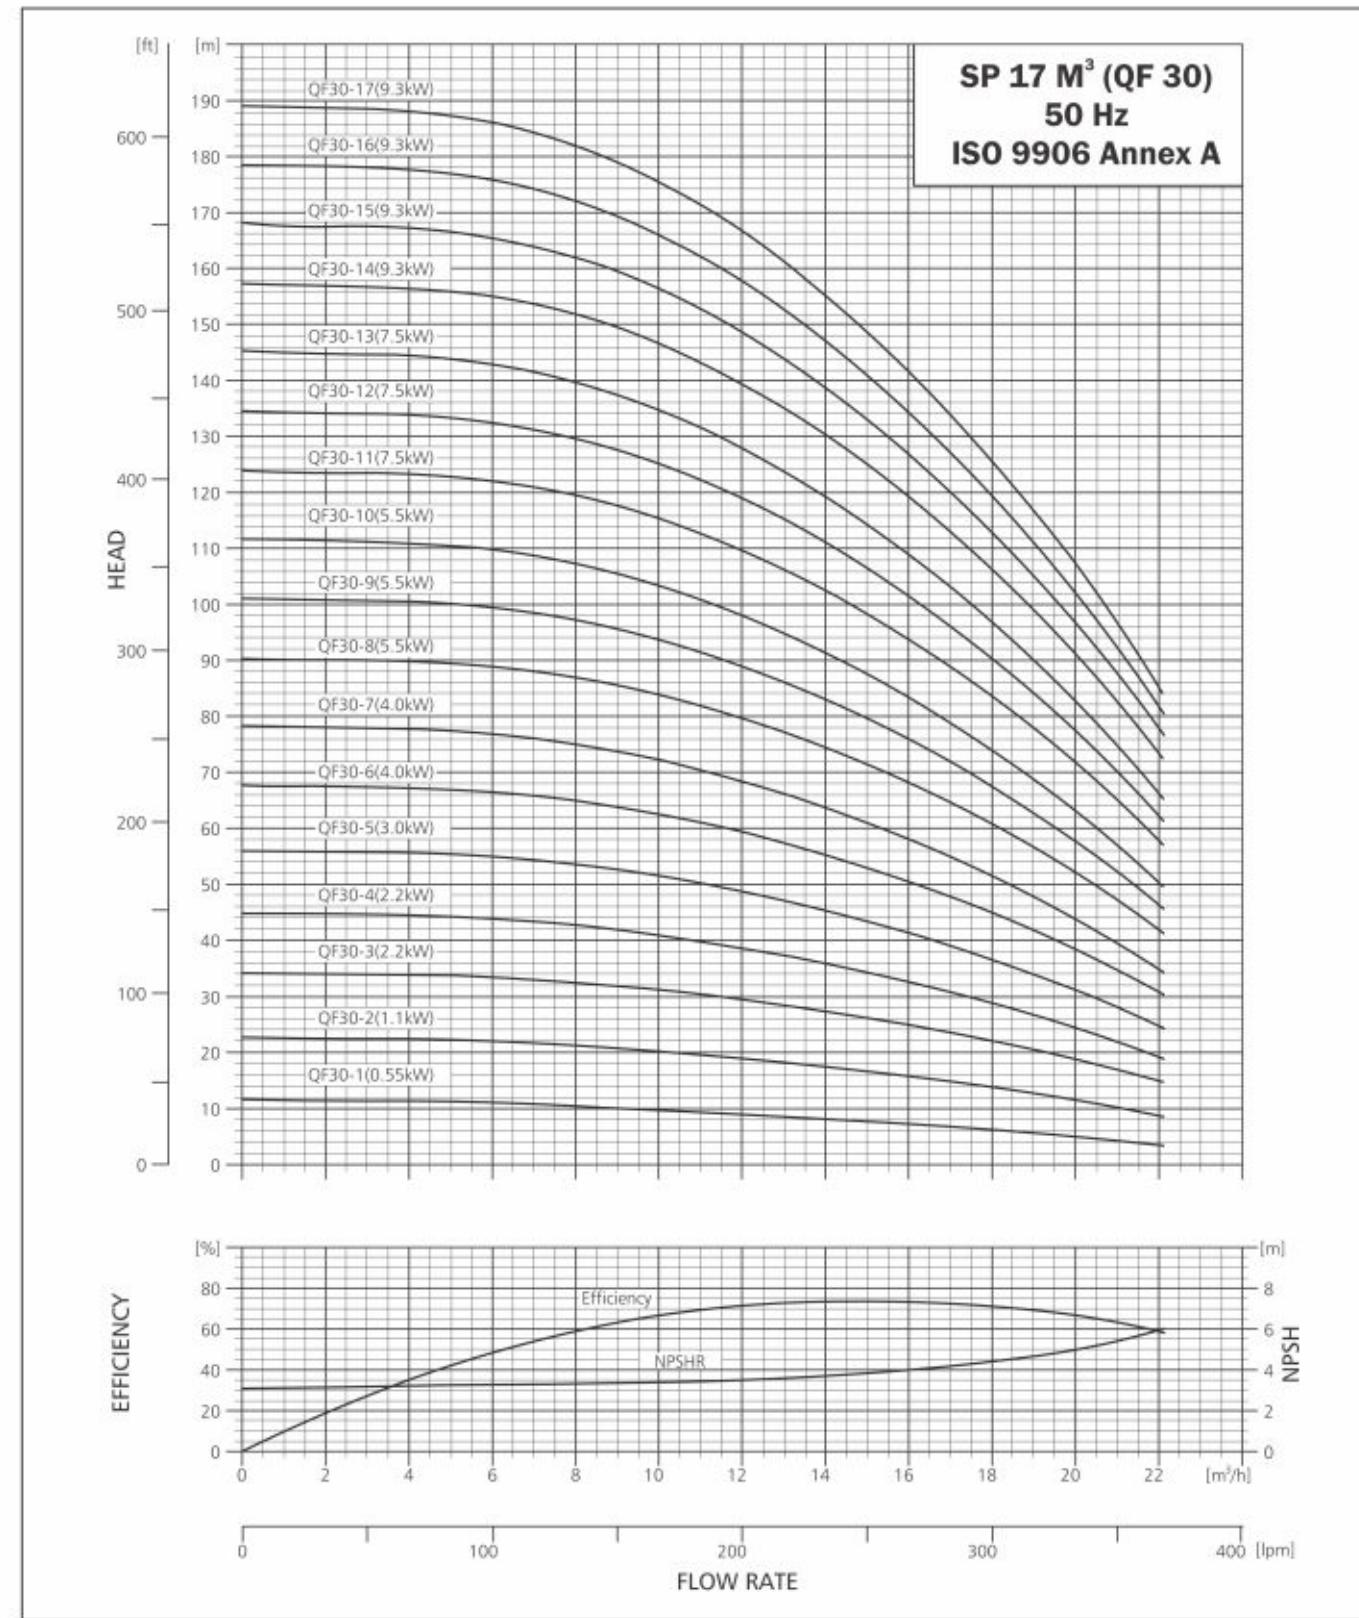

PERFORMANCE CURVE


SUBMERSIBLE PUMP QF 30

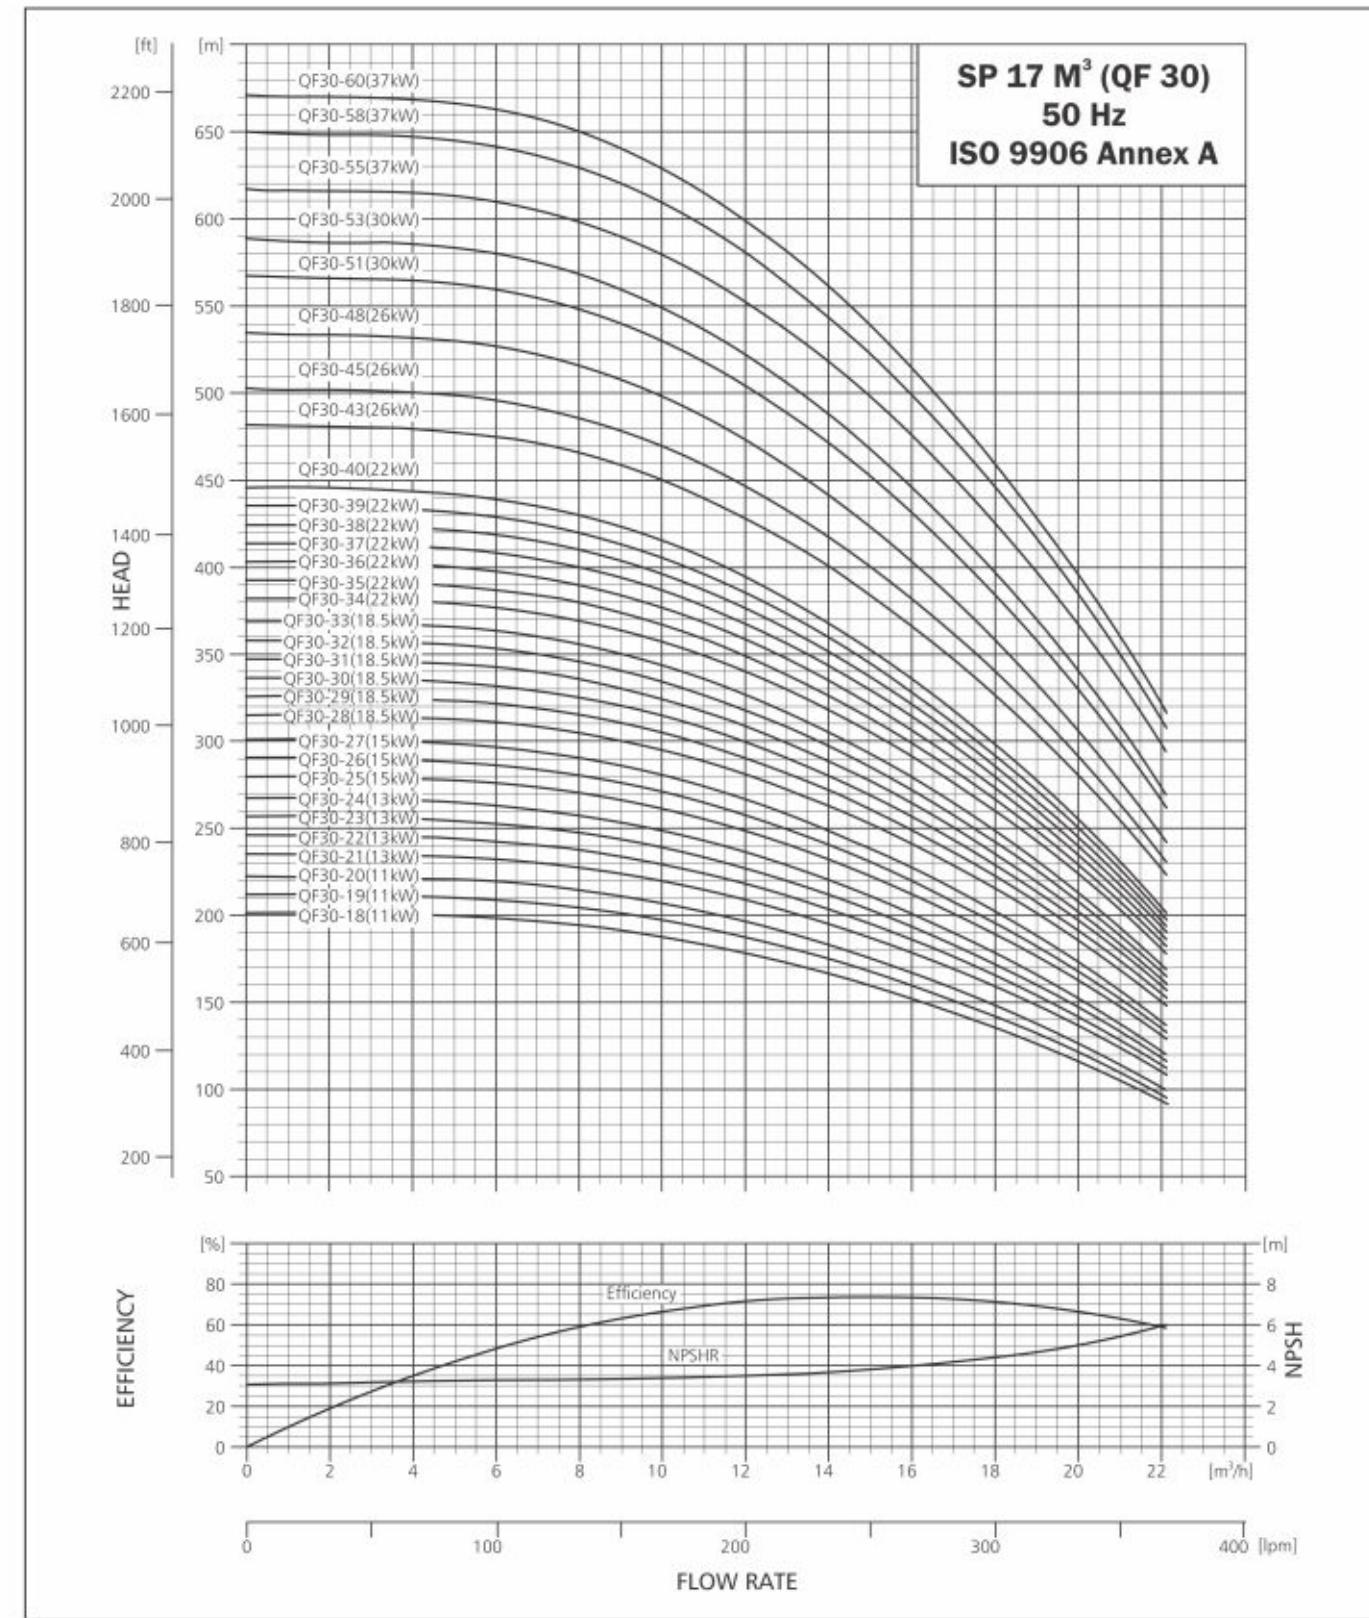

TECHNICAL DATA

SUBMERSIBLE PUMP QF 30

DIMENSIONS AND WEIGHTS

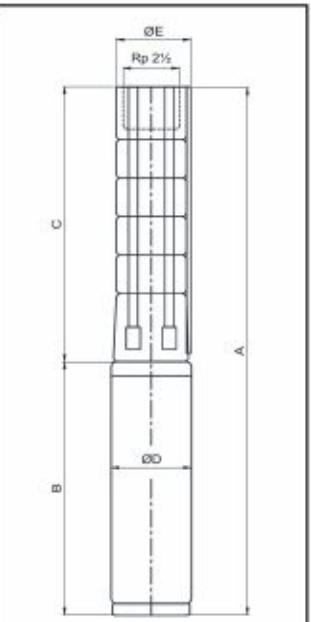

E = Maximum diameter of pump inclusive of cable guard & motor.


TECHNICAL DATA QF 30

PUMP TYPE	MOTOR		DIMENSIONS (MM)						NET WEIGHT (KG)				
	TYPE	POWER (kW)	C	B		A		D	E*	E**	MOTOR		
				1x230V	3x220V 3x400V	1x230V	3x220V 3x400V				1x230V	3x220V 3x400V	
QF30 1	PREMIUM 100	0.55	330	271	242	670	572	95	143	-	7	10	9
QF30 2	PREMIUM 100	1.1	390	340	292	802	682	95	143	-	9	13	11
QF30 3	PREMIUM 100	2.2	451	482	405	1024	856	95	143	-	10	17	15
QF30 4	PREMIUM 100	2.2	511	482	405	1084	916	95	143	-	11	17	15
QF30 5	PREMIUM 100	3	572	-	482	-	1054	95	143	-	12	-	17
QF30 6	PREMIUM 101	4	632	-	579	-	1211	95	143	-	14	-	23
QF30 7	PREMIUM 101	4	693	-	579	-	1272	95	143	-	15	-	23
QF30 8	PREMIUM 101	5.5	753	-	693	-	1446	95	143	-	16	-	29
QF30 9	PREMIUM 101	5.5	814	-	693	-	1507	95	143	-	17	-	29
QF30 10	PREMIUM 101	5.5	874	-	693	-	1567	95	143	-	18	-	29
QF30 11	PREMIUM 101	7.5	935	-	770	-	1705	95	143	-	20	-	33
QF30 12	PREMIUM 101	7.5	995	-	770	-	1765	95	143	-	21	-	33
QF30 13	PREMIUM 101	7.5	1056	-	770	-	1826	95	143	-	22	-	33
QF30 8	MATASF 150	5.5	753	-	699	-	1452	145	143	145	16	-	48
QF30 9	MATASF 150	5.5	814	-	699	-	1513	145	143	145	17	-	48
QF30 10	MATASF 150	5.5	874	-	699	-	1573	145	143	145	18	-	48
QF30 11	MATASF 150	7.5	935	-	719	-	1654	145	143	145	20	-	50
QF30 12	MATASF 150	7.5	995	-	719	-	1714	145	143	145	21	-	50
QF30 13	MATASF 150	7.5	1056	-	719	-	1775	145	143	145	22	-	50
QF30 14	MATASF 150	9.3	1116	-	749	-	1865	145	143	145	23	-	53
QF30 15	MATASF 150	9.3	1177	-	749	-	1926	145	143	145	25	-	53
QF30 16	MATASF 150	9.3	1237	-	749	-	1986	145	143	145	26	-	53
QF30 17	MATASF 150	9.3	1298	-	749	-	2047	145	143	145	27	-	53
QF30 18	MATASF 150	11	1358	-	779	-	2137	145	143	145	28	-	56
QF30 19	MATASF 150	11	1419	-	779	-	2198	145	143	145	30	-	56
QF30 20	MATASF 150	11	1479	-	779	-	2258	145	143	145	31	-	56
QF30 21	MATASF 150	13	1540	-	829	-	2369	145	143	145	32	-	61
QF30 22	MATASF 150	13	1600	-	829	-	2429	145	143	145	33	-	61
QF30 23	MATASF 150	13	1661	-	829	-	2490	145	143	145	34	-	61
QF30 24	MATASF 150	13	1721	-	829	-	2550	145	143	145	36	-	61
QF30 25	MATASF 150	15	1782	-	874	-	2656	145	143	145	37	-	66
QF30 26	MATASF 150	15	1842	-	874	-	2716	145	143	145	38	-	66
QF30 27	MATASF 150	15	1903	-	874	-	2777	145	143	145	39	-	66
QF30 28	MATASF 150	18.5	1963	-	919	-	2882	145	143	145	41	-	70
QF30 29	MATASF 150	18.5	2024	-	919	-	2943	145	143	145	42	-	70
QF30 30	MATASF 150	18.5	2084	-	919	-	3003	145	143	145	43	-	70
QF30 31	MATASF 150	18.5	2145	-	919	-	3064	145	143	145	44	-	70
QF30 32	MATASF 150	18.5	2205	-	919	-	3124	145	143	145	46	-	70
QF30 33	MATASF 150	18.5	2266	-	919	-	3185	145	143	145	47	-	70
QF30 34	MATASF 150	22	2326	-	1009	-	3335	145	143	145	48	-	79
QF30 35	MATASF 150	22	2387	-	1009	-	3396	145	143	145	49	-	79
QF30 36	MATASF 150	22	2447	-	1009	-	3456	145	143	145	50	-	79
QF30 37	MATASF 150	22	2508	-	1009	-	3517	145	143	145	52	-	79
QF30 38	MATASF 150	22	2568	-	1009	-	3577	145	143	145	53	-	79
QF30 39	MATASF 150	22	2629	-	1009	-	3638	145	143	145	54	-	79
QF30 40	MATASF 150	22	2689	-	1009	-	3698	145	143	145	55	-	79
QF30 43	MATASF 150	26	2871	-	1114	-	3985	145	143	145	59	-	90
QF30 45	MATASF 150	26	2992	-	1114	-	4106	145	143	145	62	-	90
QF30 48	MATASF 150	26	3173	-	1114	-	4287	145	143	145	65	-	90
QF30 51	MATASF 150	30	3355	-	1214	-	4569	145	143	145	69	-	100
QF30 53	MATASF 150	30	3476	-	1214	-	4690	145	143	145	71	-	100
QF30 55	MATASF 150	37	3597	-	1294	-	4891	145	143	145	74	-	106
QF30 51	MATASF 200	30	3355	-	1140	-	4495	194	194	194	69	-	130
QF30 53	MATASF 200	30	3476	-	1140	-	4616	194	194	194	71	-	130
QF30 55	MATASF 200	37	3597	-	1140	-	4737	194	194	194	74	-	145
QF30 58	MATASF 200	37	3778	-	1140	-	4918	194	194	194	78	-	145
QF30 60	MATASF 200	37	3899	-	1140	-	5039	194	194	194	80	-	145

* Maximum diameter of pump with one motor cable.


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 30

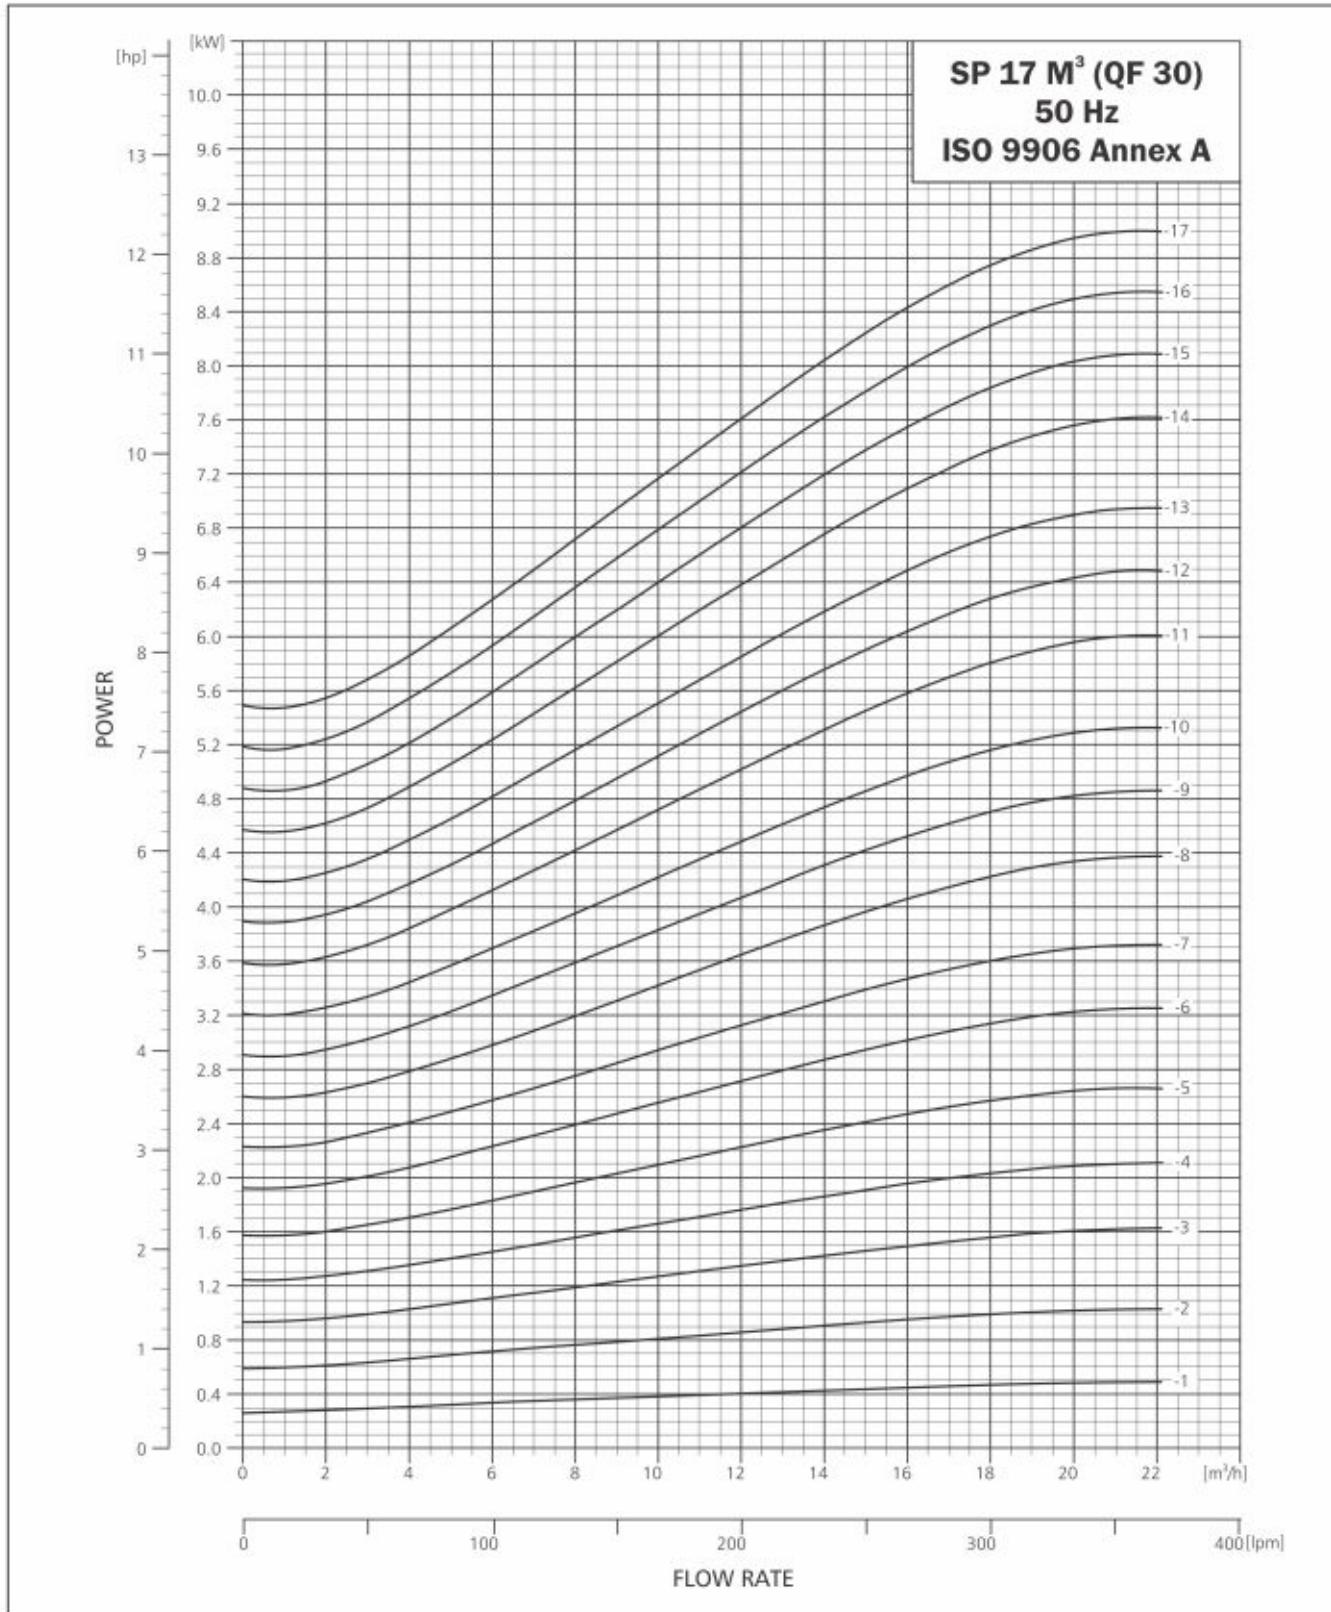


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 30

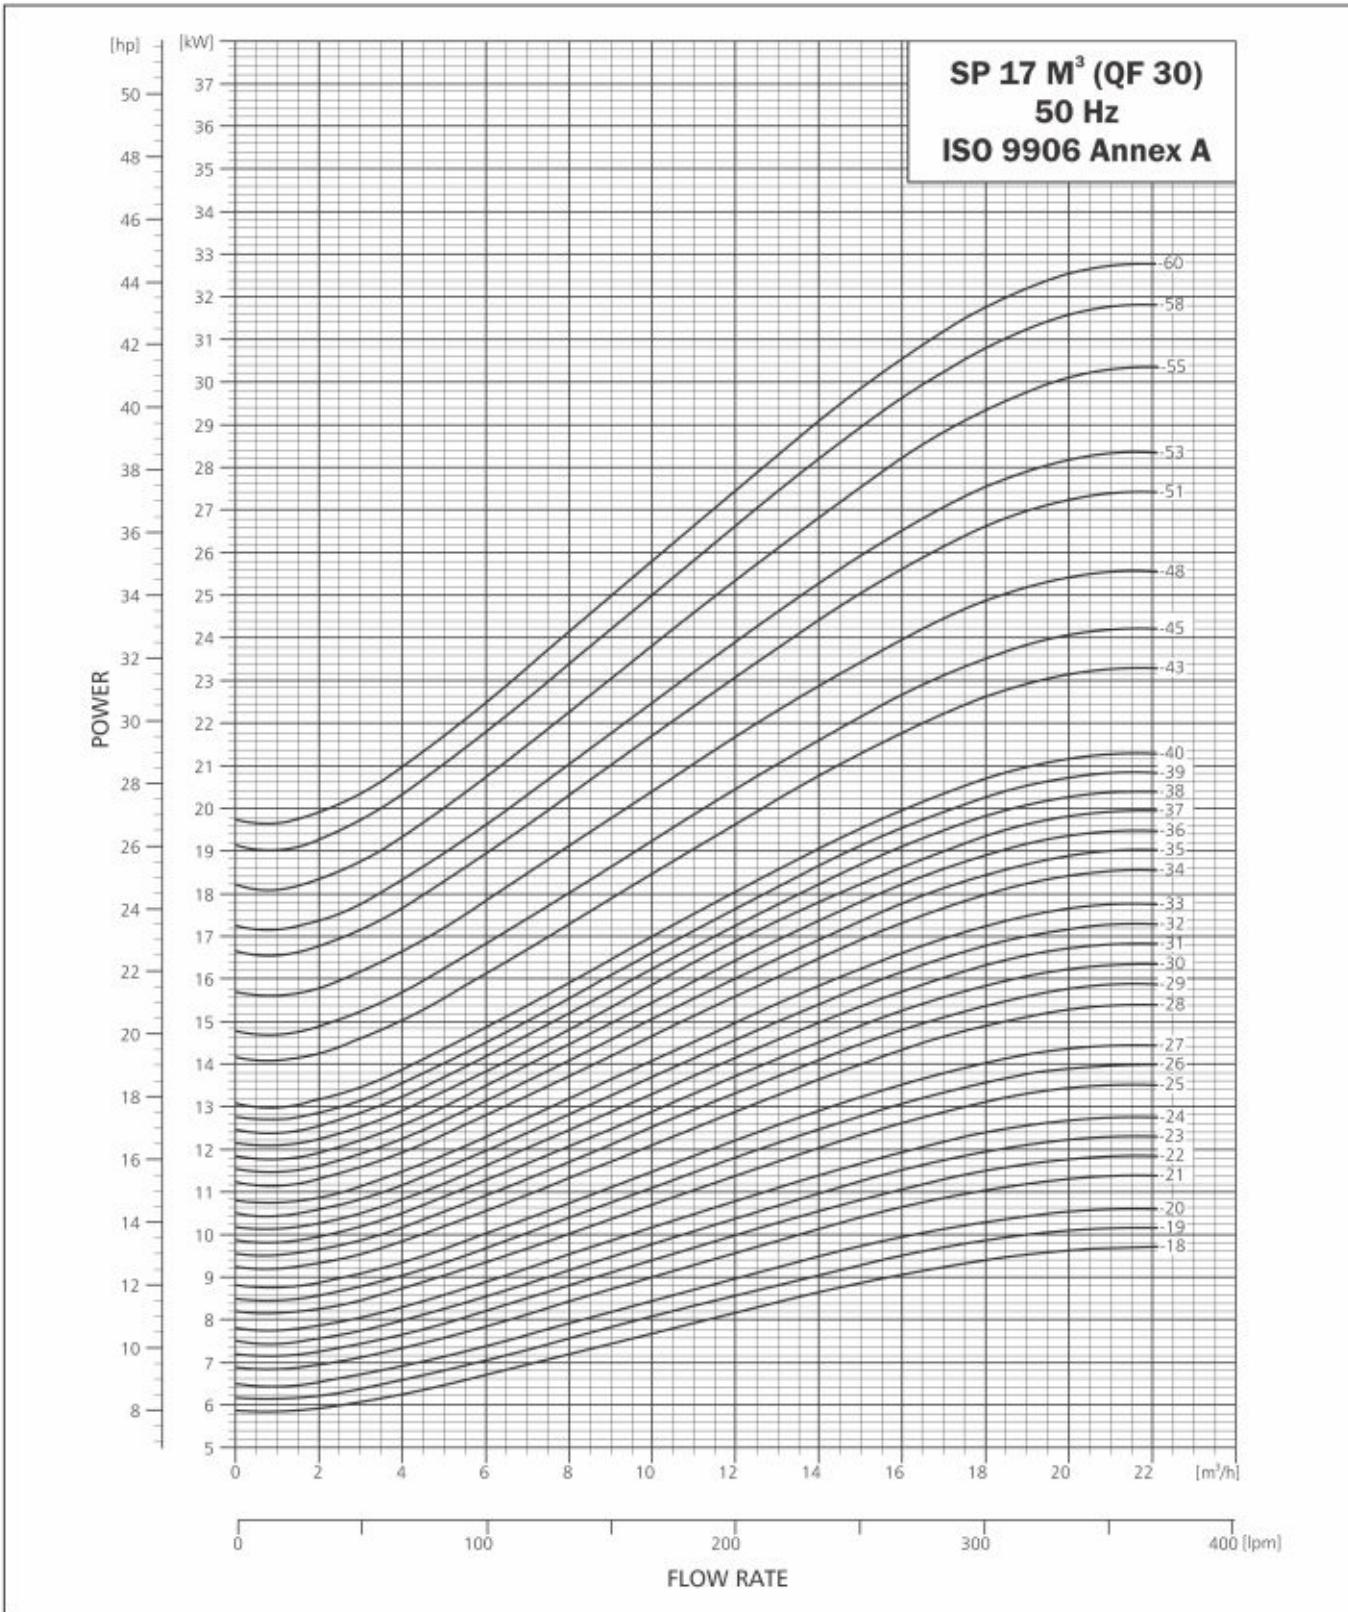


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 50

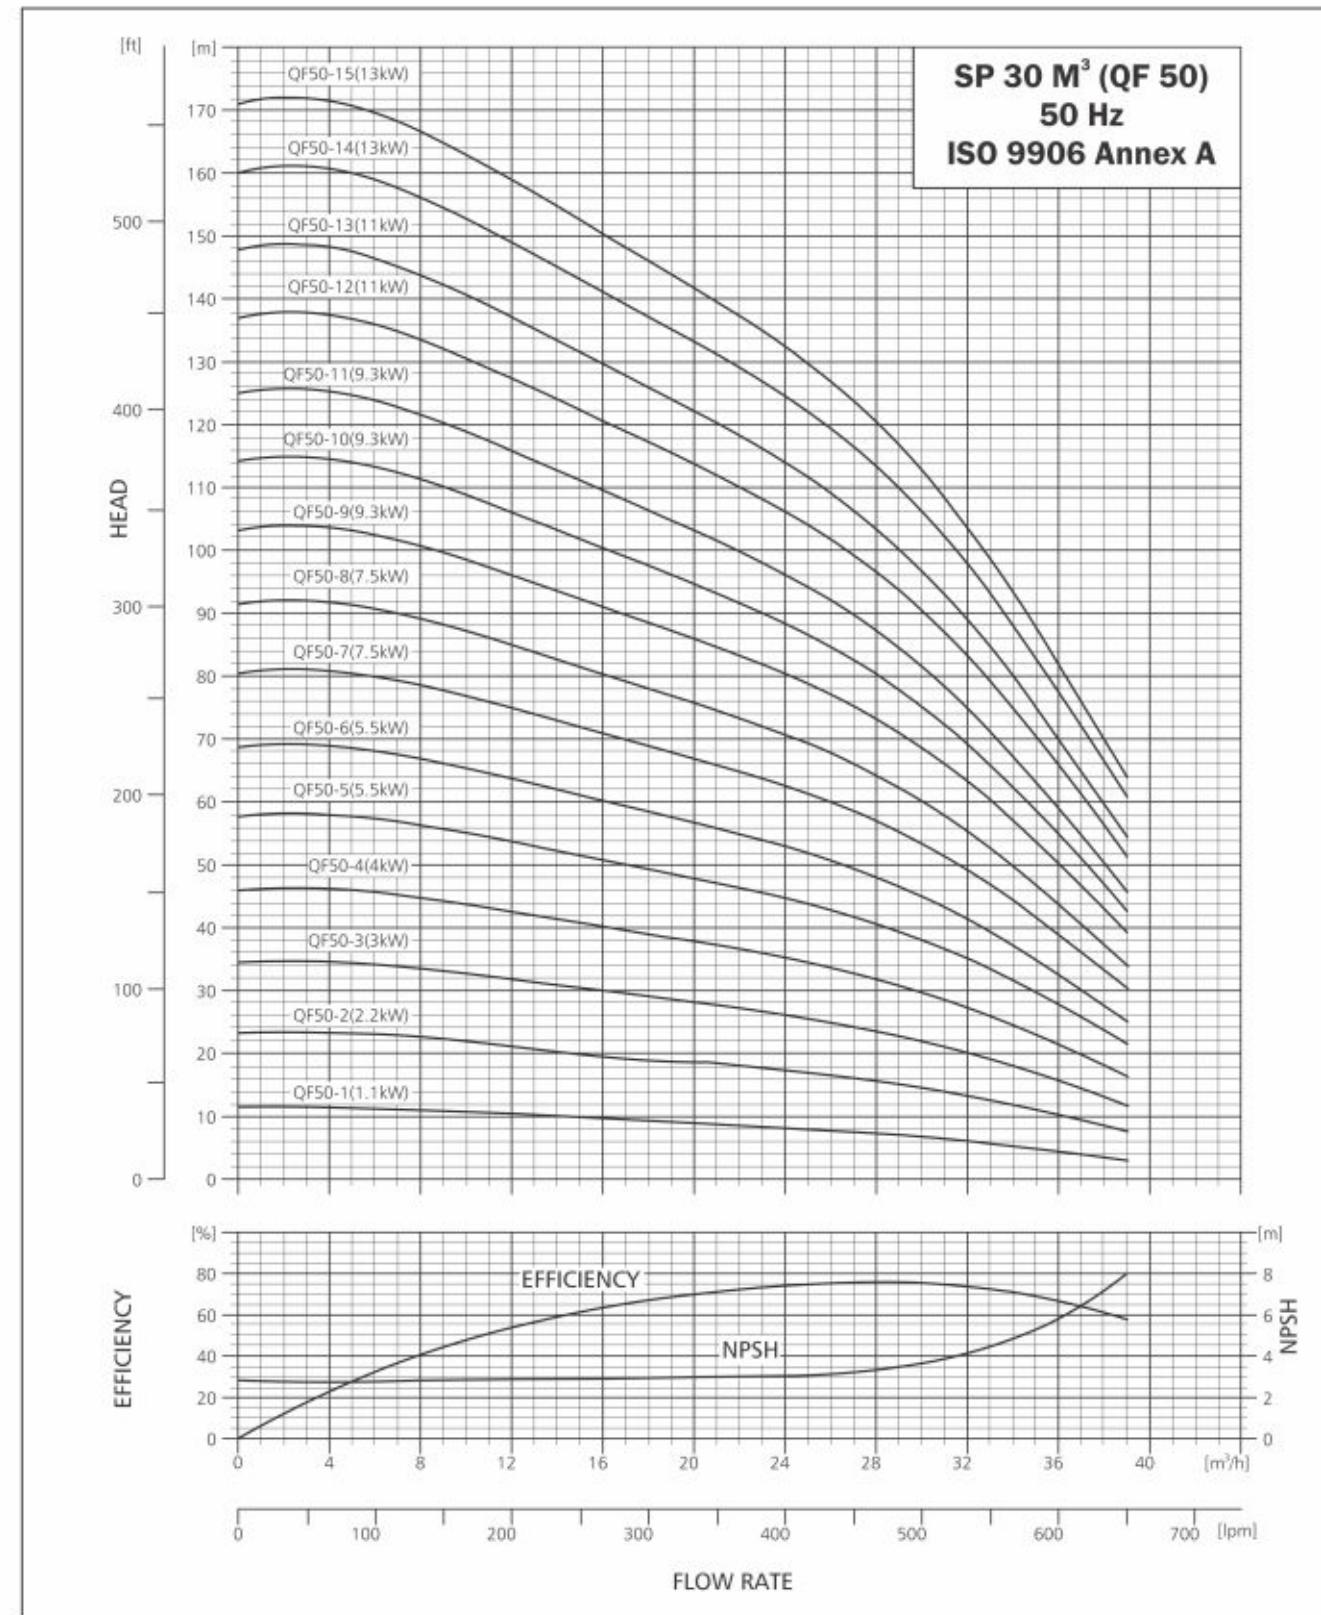

PERFORMANCE CURVE


SUBMERSIBLE PUMP QF 50

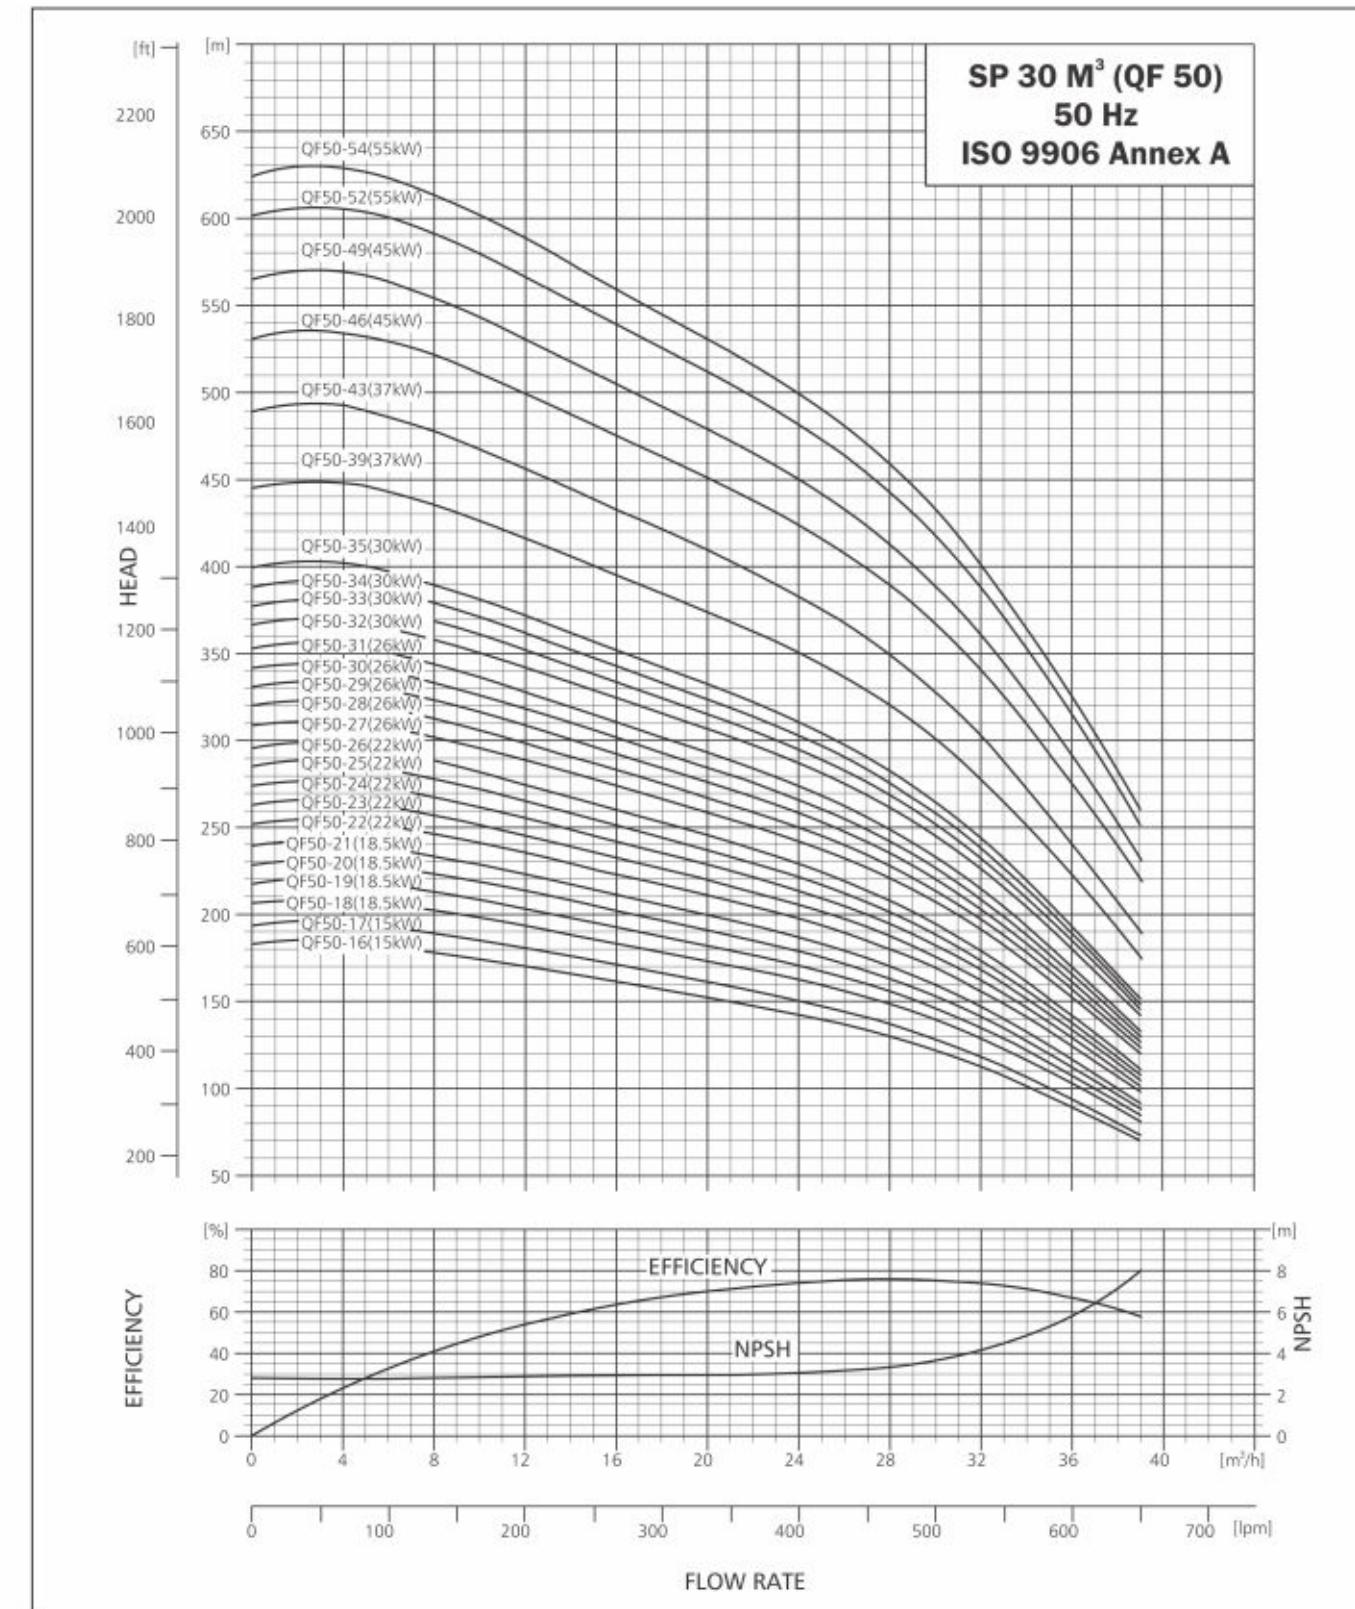

TECHNICAL DATA

SUBMERSIBLE PUMP QF 50

DIMENSIONS AND WEIGHTS

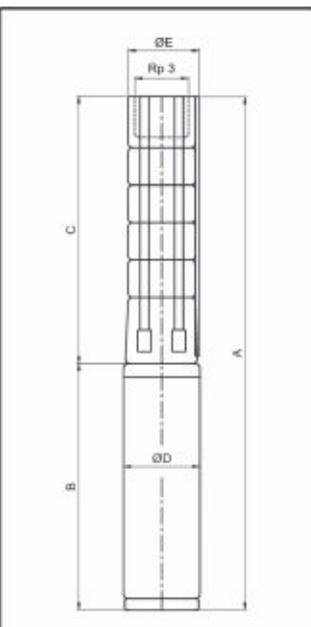

E = Maximum diameter of pump inclusive of cable guard & motor.

TECHNICAL DATA QF 50

PUMP TYPE	MOTOR		DIMENSIONS (MM)						NET WEIGHT (KG)		
	TYPE	POWER (kW)	C	B		A		D	E*	E**	MOTOR
				1x230V 3x400V	3x220V 3x400V	1x230V 3x400V	3x220V 3x400V				1x230V 3x400V
QF50 1	PREMIUM 100	1.1	366	340	292	706	658	95	143	-	8
QF50 2	PREMIUM 100	2.2	462	482	340	944	802	95	143	-	10
QF50 3	PREMIUM 100	3	558	-	482	-	1040	95	143	-	12
QF50 4	PREMIUM 101	4	654	-	579	-	1233	95	143	-	14
QF50 5	PREMIUM 101	5.5	750	-	693	-	1443	95	143	-	16
QF50 6	PREMIUM 101	5.5	846	-	693	-	1539	95	143	-	18
QF50 7	PREMIUM 101	7.5	942	-	770	-	1712	95	143	-	20
QF50 8	PREMIUM 101	7.5	1038	-	770	-	1808	95	143	-	22
QF50 9	MATASF 150	5.5	750	-	699	-	1449	145	143	145	16
QF50 10	MATASF 150	5.5	846	-	699	-	1545	145	143	145	18
QF50 11	MATASF 150	7.5	942	-	719	-	1661	145	143	145	20
QF50 12	MATASF 150	7.5	1038	-	719	-	1757	145	143	145	22
QF50 13	MATASF 150	9.3	1134	-	749	-	1883	145	143	145	24
QF50 14	MATASF 150	9.3	1230	-	749	-	1979	145	143	145	25
QF50 15	MATASF 150	9.3	1326	-	749	-	2075	145	143	145	27
QF50 16	MATASF 150	11	1422	-	779	-	2201	145	143	145	29
QF50 17	MATASF 150	11	1518	-	779	-	2297	145	143	145	31
QF50 18	MATASF 150	13	1614	-	829	-	2443	145	143	145	33
QF50 19	MATASF 150	13	1710	-	829	-	2539	145	143	145	35
QF50 20	MATASF 150	15	1806	-	874	-	2680	145	143	145	37
QF50 21	MATASF 150	15	1902	-	874	-	2776	145	143	145	39
QF50 22	MATASF 150	18.5	1998	-	919	-	2917	145	143	145	41
QF50 23	MATASF 150	18.5	2094	-	919	-	3013	145	143	145	42
QF50 24	MATASF 150	22	2574	-	1009	-	3583	145	143	145	52
QF50 25	MATASF 150	22	2670	-	1009	-	3679	145	143	145	54
QF50 26	MATASF 150	22	2766	-	1009	-	3775	145	143	145	56
QF50 27	MATASF 150	26	2862	-	1114	-	3976	145	143	145	58
QF50 28	MATASF 150	26	2958	-	1114	-	4072	145	143	145	59
QF50 29	MATASF 150	26	3054	-	1114	-	4168	145	143	145	61
QF50 30	MATASF 150	26	3150	-	1114	-	4264	145	143	145	63
QF50 31	MATASF 150	26	3246	-	1114	-	4360	145	143	145	65
QF50 32	MATASF 150	30	3342	-	1214	-	4556	145	143	145	67
QF50 33	MATASF 150	30	3438	-	1214	-	4652	145	143	145	69
QF50 34	MATASF 150	30	3534	-	1214	-	4748	145	143	145	71
QF50 35	MATASF 150	30	3630	-	1214	-	4844	145	143	145	73
QF50 36	MATASF 200	30	3342	-	1140	-	4482	194	194	194	67
QF50 37	MATASF 200	30	3438	-	1140	-	4578	194	194	194	69
QF50 38	MATASF 200	30	3534	-	1140	-	4674	194	194	194	71
QF50 39	MATASF 200	30	3630	-	1140	-	4770	194	194	194	73
QF50 40	MATASF 200	37	4014	-	1140	-	5154	194	194	194	80
QF50 41	MATASF 200	37	4398	-	1140	-	5538	194	194	194	88
QF50 42	MATASF 200	45	4686	-	1230	-	5916	194	194	194	93
QF50 43	MATASF 200	45	4974	-	1230	-	6204	194	194	194	99
QF50 44	MATASF 200	55	5262	-	1340	-	6602	194	194	194	105
QF50 45	MATASF 200	55	5454	-	1340	-	6794	194	194	194	109
QF50 46	MATASF 200	55	5454	-	1340	-	6794	194	194	194	109
QF50 47	MATASF 200	55	5454	-	1340	-	6794	194	194	194	109
QF50 48	MATASF 200	55	5454	-	1340	-	6794	194	194	194	109
QF50 49	MATASF 200	55	5454	-	1340	-	6794	194	194	194	109
QF50 50	MATASF 200	55	5454	-	1340	-	6794	194	194	194	109
QF50 51	MATASF 200	55	5454	-	1340	-	6794	194	194	194	109
QF50 52	MATASF 200	55	5454	-	1340	-	6794	194	194	194	109
QF50 53	MATASF 200	55	5454	-	1340	-	6794	194	194	194	109
QF50 54	MATASF 200	55	5454	-	1340	-	6794	194	194	194	109

* Maximum diameter of pump with one motor cable.

** Maximum diameter of pump with two motor cable.

Motor type may change as per requirement.

TECHNICAL DATA


SUBMERSIBLE PUMP QF 50

PERFORMANCE TABLE QF 50

MODEL	QF-50			m³/h		DISCHARGE (Q)	
-------	-------	--	--	------	--	---------------	--


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 50

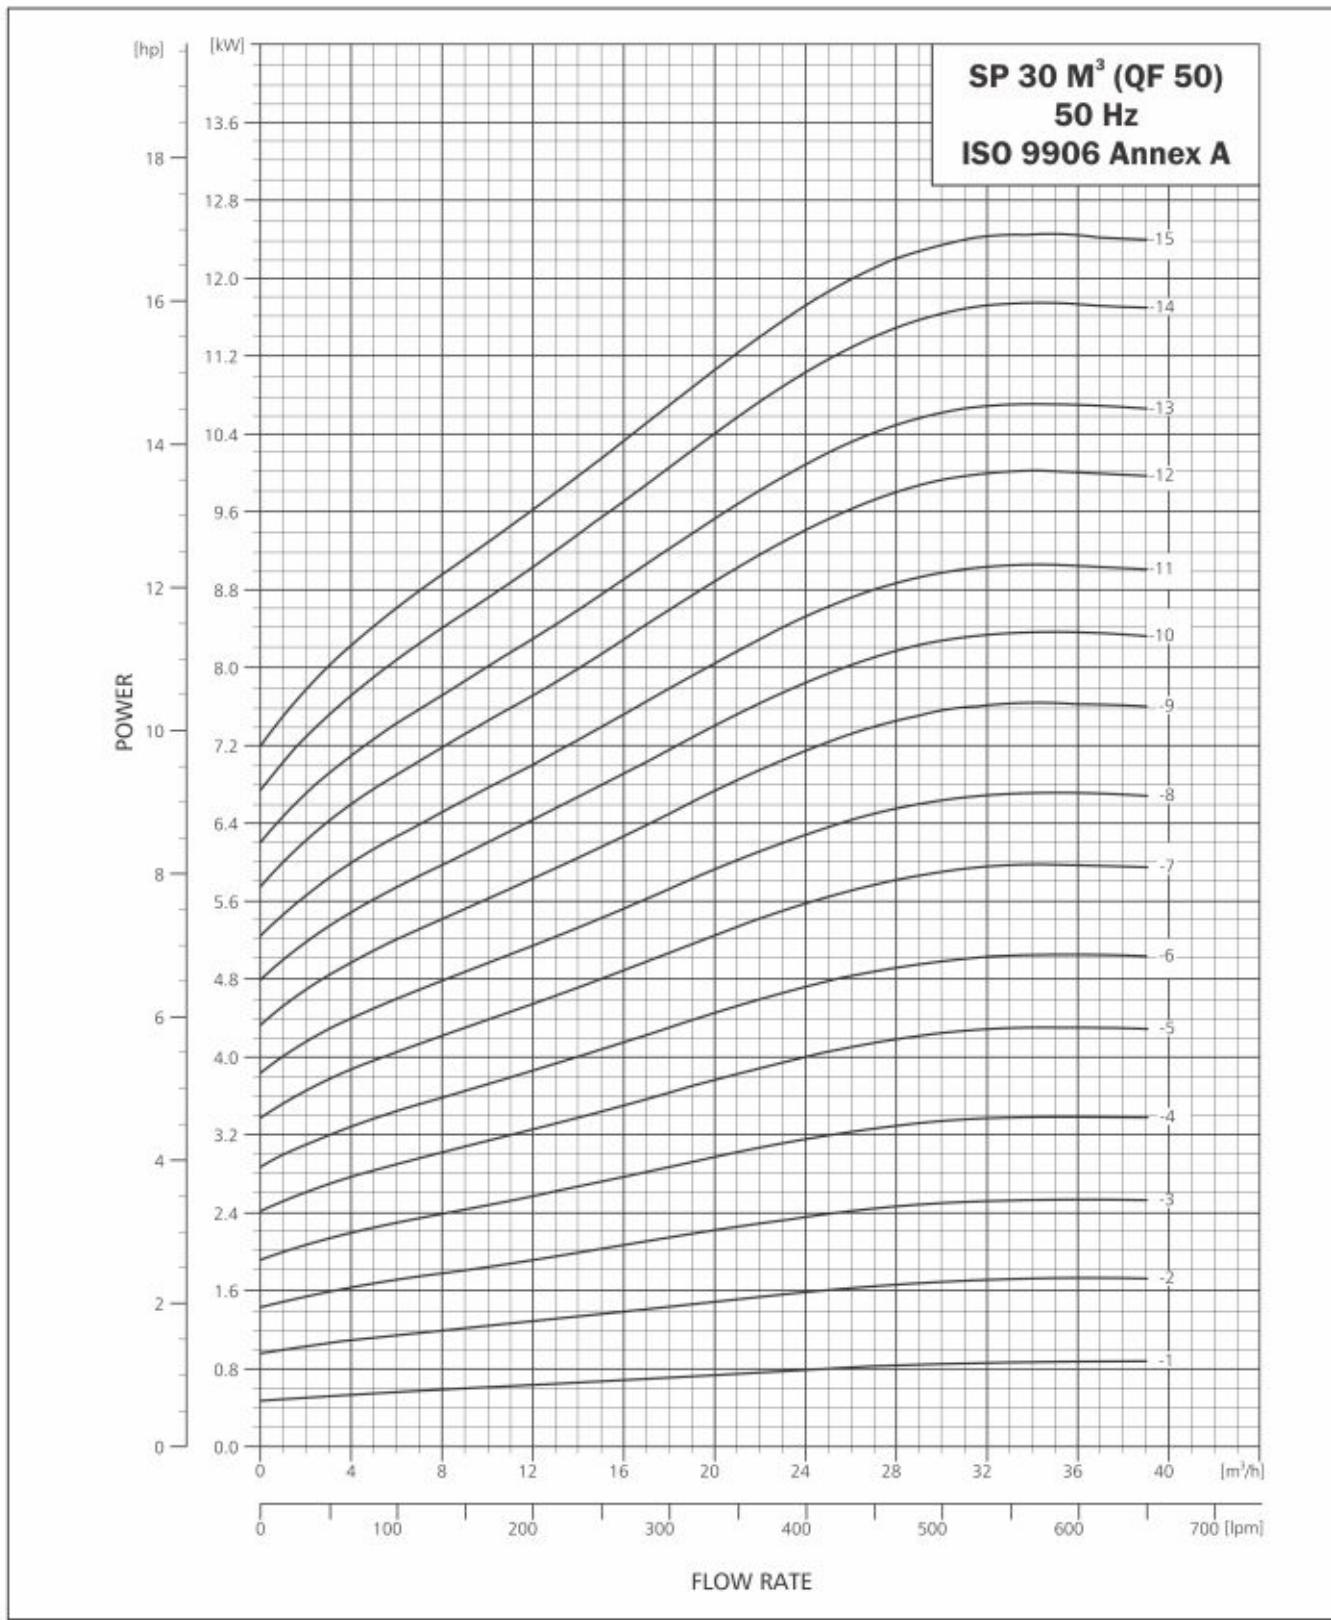


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 50

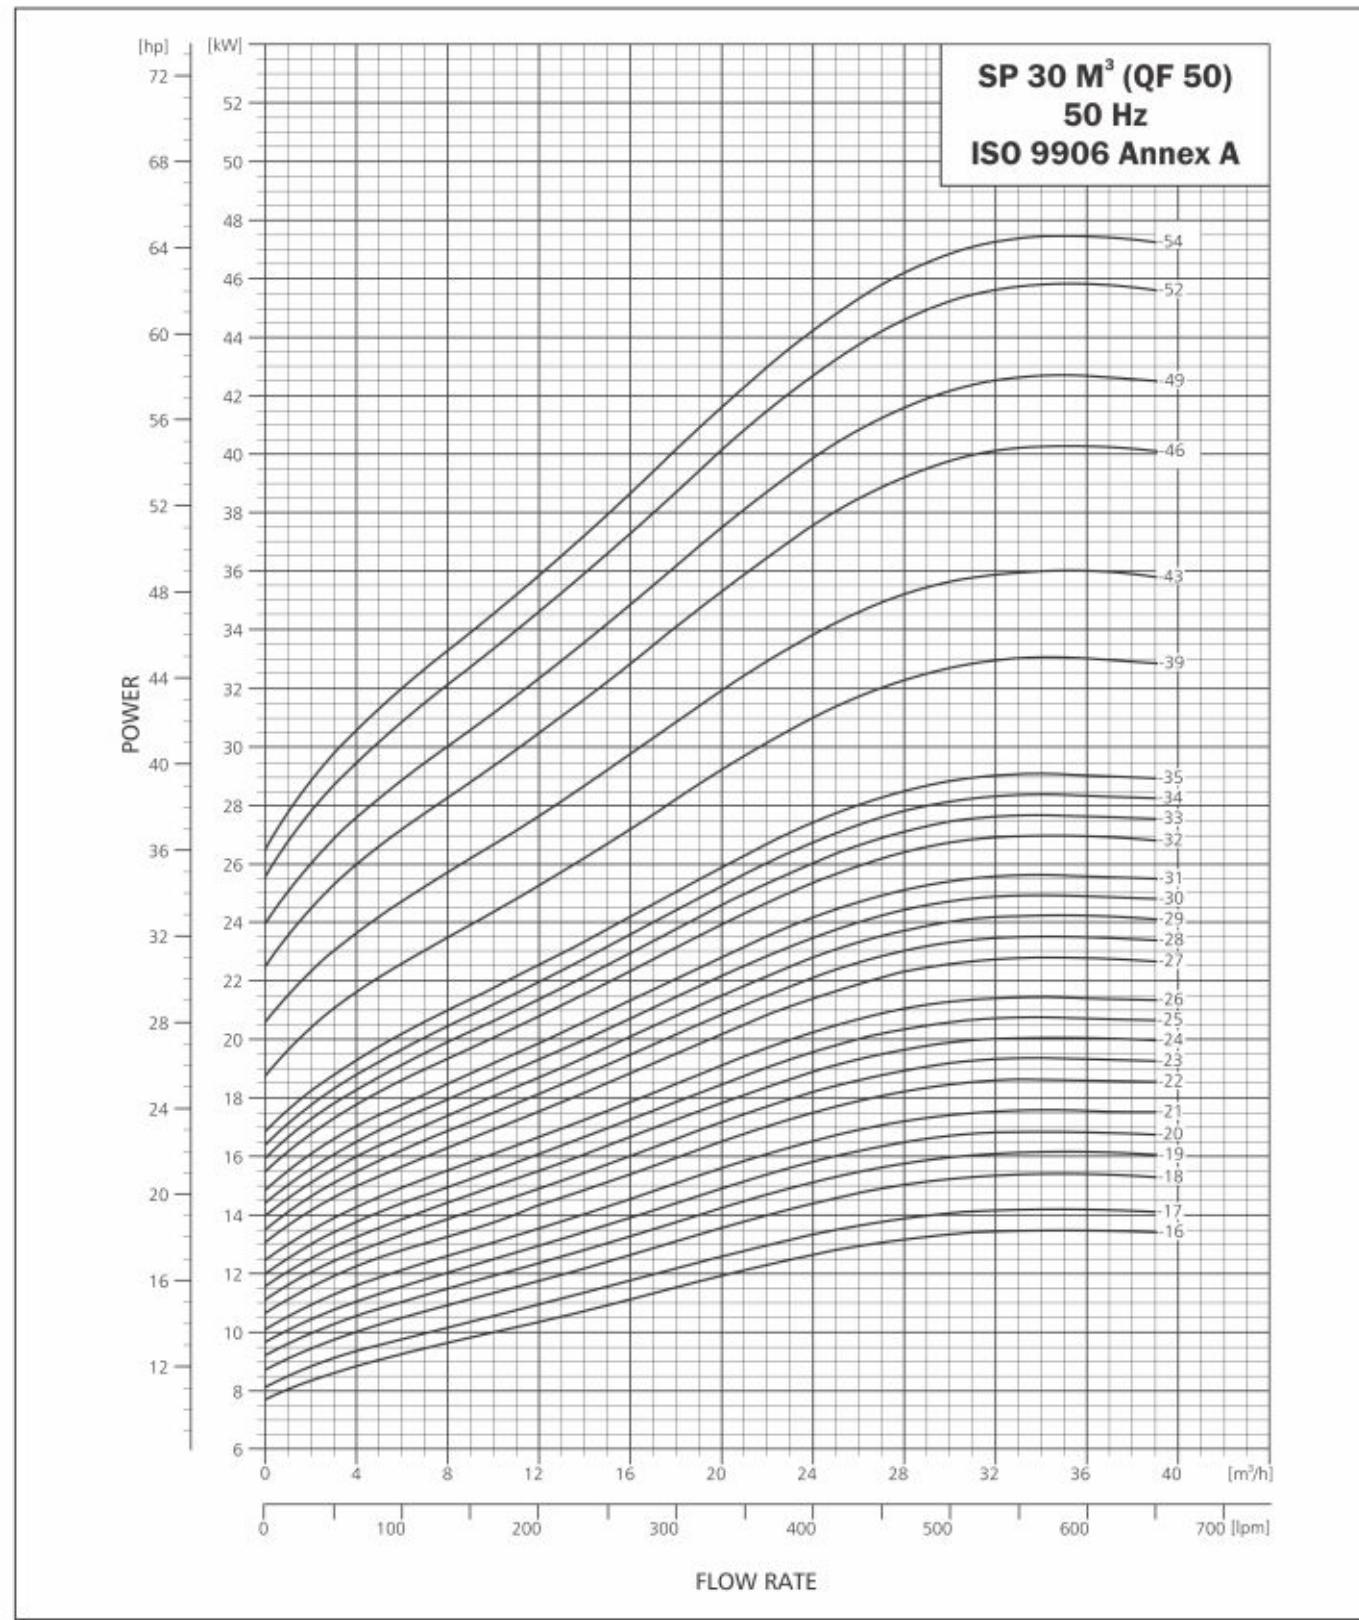


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 75

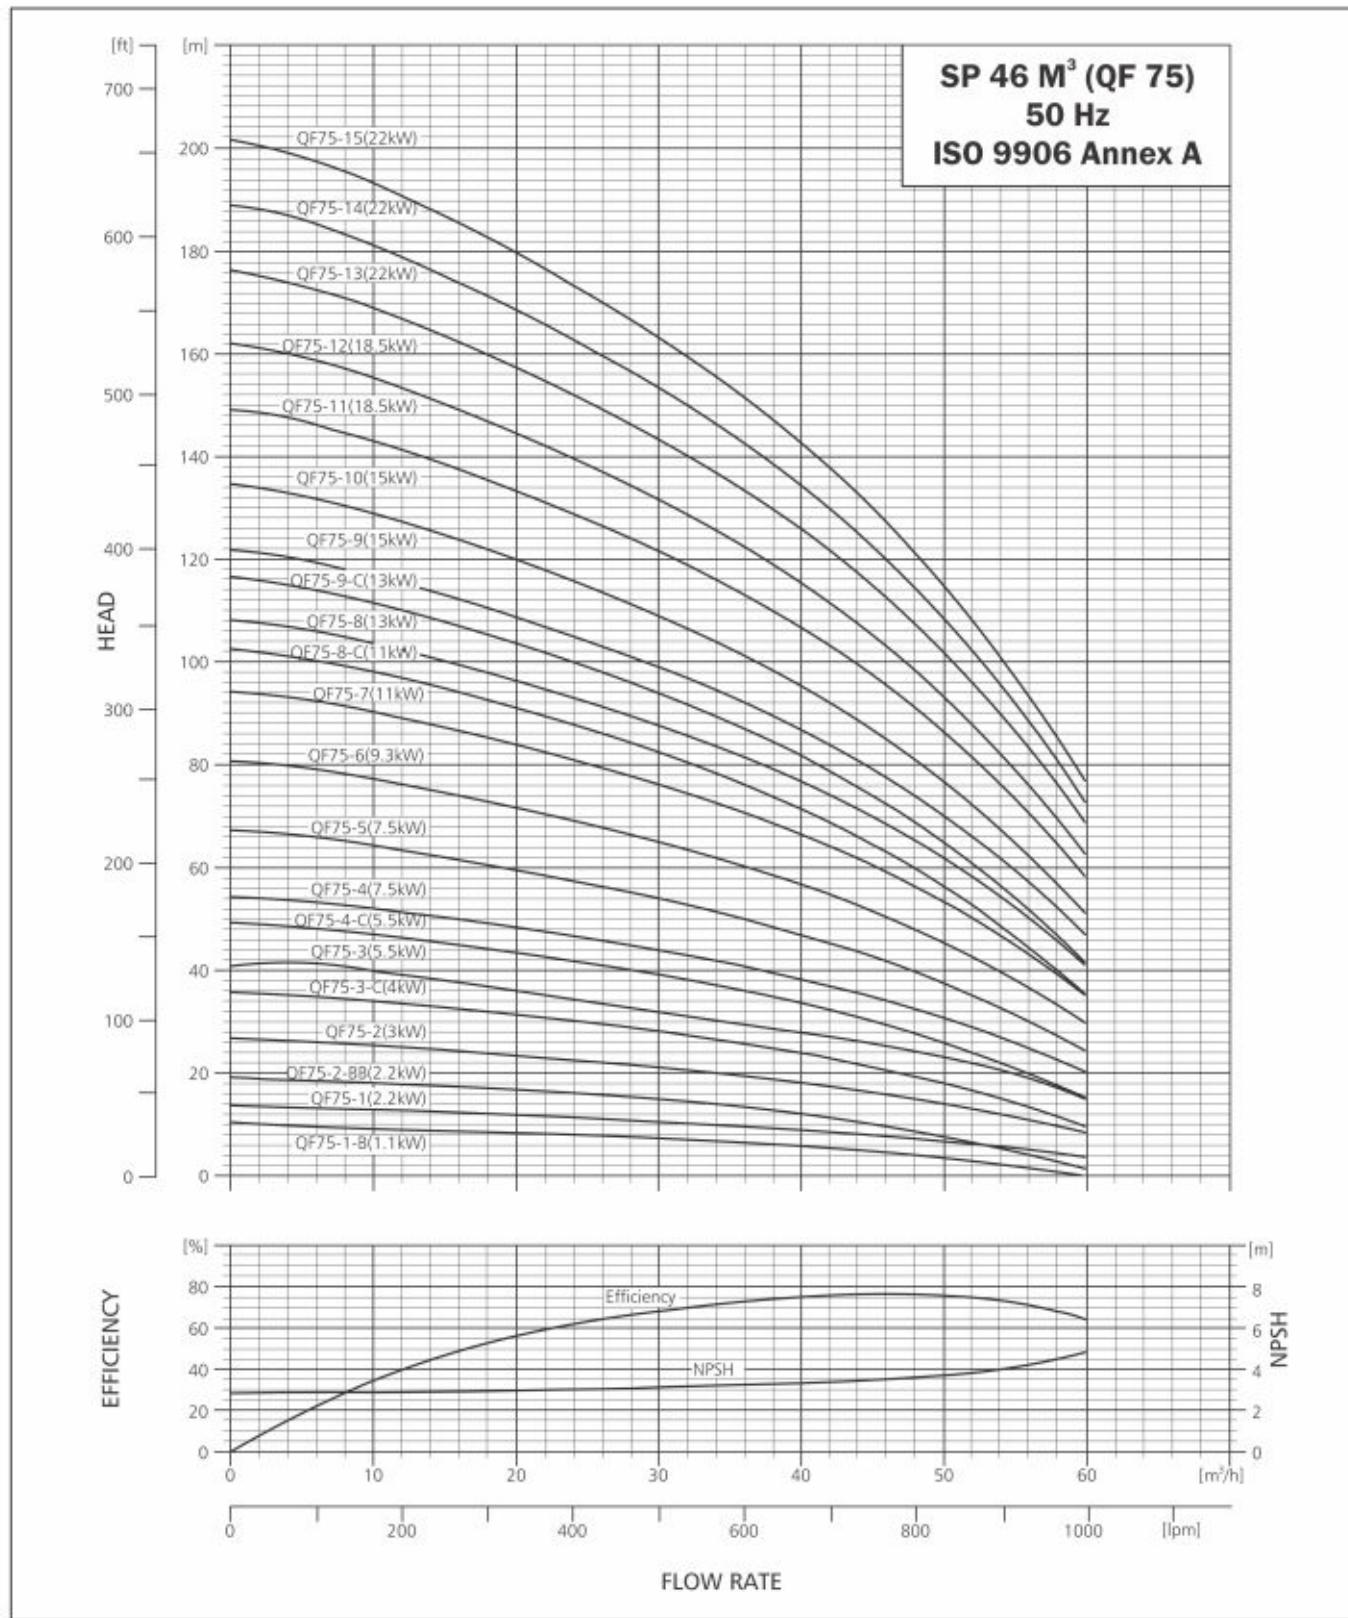

PERFORMANCE CURVE


SUBMERSIBLE PUMP QF 75

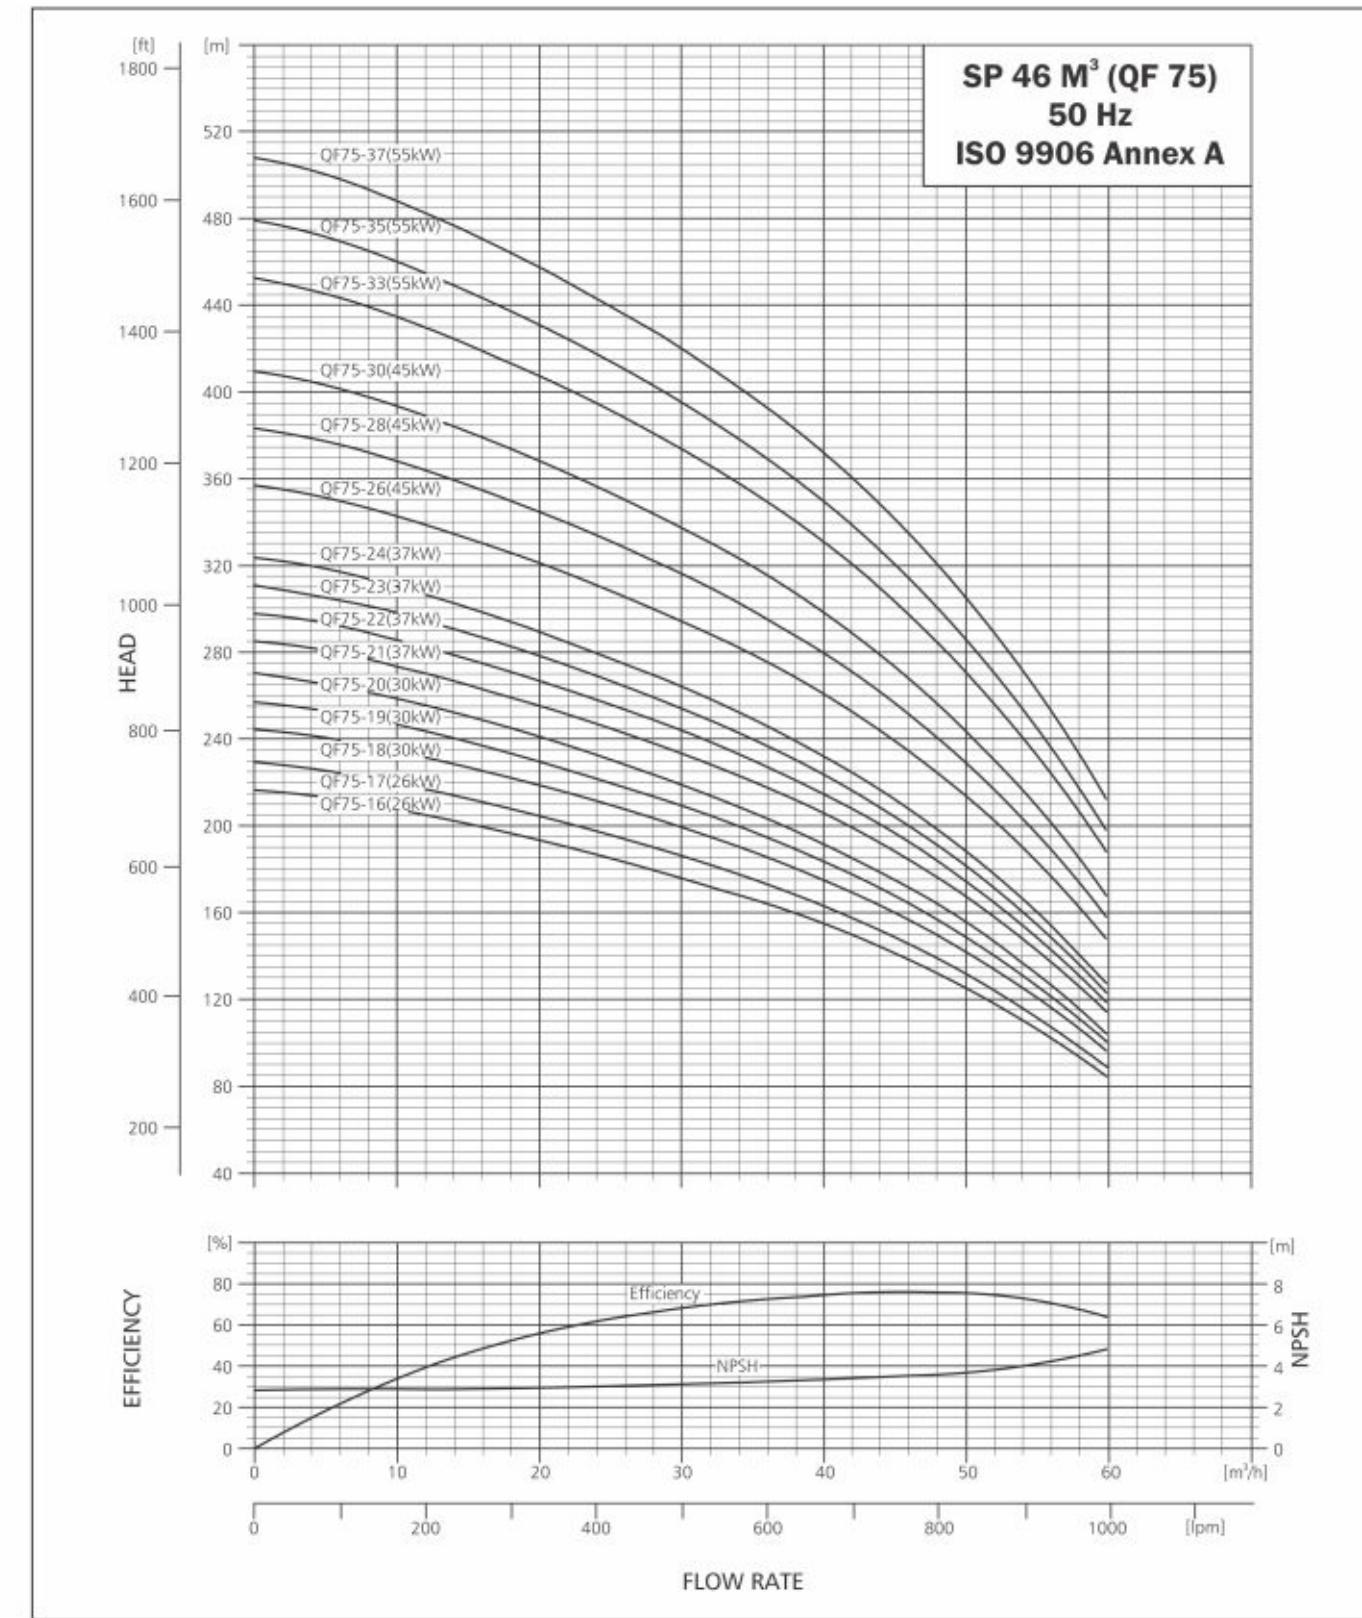

TECHNICAL DATA

SUBMERSIBLE PUMP QF 75

DIMENSIONS AND WEIGHTS

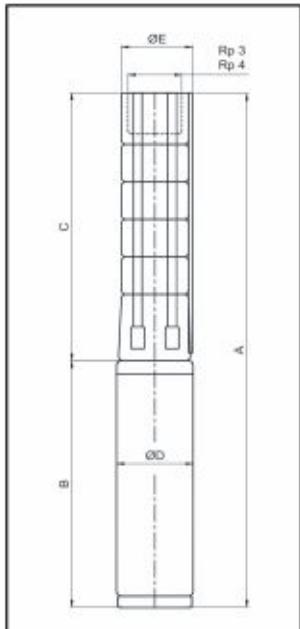

E = Maximum diameter of pump inclusive of cable guard & motor.

TECHNICAL DATA QF 75

PUMP TYPE	MOTOR		DIMENSIONS (MM)						NETWEIGHT(KG)					
	TYPE	POWER (kW)	Rp 3" CONNECTION			Rp 4" CONNECTION			B	D	PUMP	MOTOR		
			A	C	E*	E**	A	C	E*	E**				
QF75-1-B	PREMIUM 100	1.1	659	367	150	-	659	367	150	-	292	95	6	11
QF75-1	PREMIUM 100	2.2	772	367	150	-	772	367	150	-	405	95	6	15
QF75-2-BB	PREMIUM 100	2.2	885	480	150	-	885	480	150	-	405	95	8	15
QF75-2	PREMIUM 100	3	962	480	150	-	962	480	150	-	482	95	8	17
QF75-3-C	PREMIUM 101	4	1172	593	150	-	1172	593	150	-	579	95	11	23
QF75-3	PREMIUM 101	5.5	1286	593	150	-	1286	593	150	-	693	95	11	29
QF75-4-C	PREMIUM 101	5.5	1399	706	150	-	1399	706	150	-	693	95	13	29
QF75-4	PREMIUM 101	7.5	1476	706	150	-	1476	706	150	-	770	95	13	33
QF75-5	PREMIUM 101	7.5	1589	819	150	-	1589	819	150	-	770	95	15	33
QF75-3-C	MATASF 150	4	1309	610	150	155	1309	610	150	155	699	145	11	48
QF75-3	MATASF 150	5.5	1309	610	150	155	1309	610	150	155	699	145	11	48
QF75-4-C	MATASF 150	5.5	1422	723	150	155	1422	723	150	155	699	145	13	48
QF75-4	MATASF 150	7.5	1442	723	150	155	1442	723	150	155	719	145	13	50
QF75-5	MATASF 150	7.5	1555	836	150	155	1555	836	150	155	719	145	15	50
QF75-6	MATASF 150	9.3	1698	949	150	155	1698	949	150	155	749	145	18	53
QF75-7	MATASF 150	11	1841	1062	150	155	1841	1062	150	155	779	145	20	56
QF75-8C	MATASF 150	11	1954	1175	150	155	1954	1175	150	155	779	145	22	56
QF75-8	MATASF 150	13	2004	1175	150	155	2004	1175	150	155	829	145	22	61
QF75-9C	MATASF 150	13	2117	1288	150	155	2117	1288	150	155	829	145	24	61
QF75-9	MATASF 150	15	2162	1288	150	155	2162	1288	150	155	874	145	24	66
QF75-10	MATASF 150	15	2275	1401	150	155	2275	1401	150	155	874	145	27	66
QF75-11	MATASF 150	18.5	2433	1514	150	155	2433	1514	150	155	919	145	29	70
QF75-12	MATASF 150	18.5	2546	1627	150	155	2546	1627	150	155	919	145	31	70
QF75-13	MATASF 150	22	2749	1740	150	155	2749	1740	150	155	1009	145	34	79
QF75-14	MATASF 150	22	2862	1853	150	155	2862	1853	150	155	1009	145	36	79
QF75-15	MATASF 150	22	2975	1966	150	155	2975	1966	150	155	1009	145	38	79
QF75-16	MATASF 150	26	3193	2079	150	155	3193	2079	150	155	1114	145	41	90
QF75-17	MATASF 150	26	3306	2192	150	155	3306	2192	150	155	1114	145	43	90
QF75-18	MATASF 150	30	3519	2305	150	155	3519	2305	150	155	1214	145	45	100
QF75-19	MATASF 150	30	3632	2418	150	155	3632	2418	150	155	1214	145	47	100
QF75-20	MATASF 150	30	3745	2531	150	155	3745	2531	150	155	1214	145	50	100
QF75-18	MATASF 200	30	3445	2305	195	195	3445	2305	195	195	1140	195	45	172
QF75-19	MATASF 200	30	3558	2418	195	195	3558	2418	195	195	1140	195	47	172
QF75-20	MATASF 200	30	3671	2531	195	195	3671	2531	195	195	1140	195	50	172
QF75-21	MATASF 200	37	3784	2644	195	195	3784	2644	195	195	1140	195	52	172
QF75-22	MATASF 200	37	3897	2757	195	195	3897	2757	195	195	1140	195	54	172
QF75-23	MATASF 200	37	4010	2870	195	195	4010	2870	195	195	1140	195	57	172
QF75-24	MATASF 200	37	4123	2983	195	195	4123	2983	195	195	1140	195	59	172
QF75-26	MATASF 200	45	4439	3209	195	195	4439	3209	195	195	1230	195	64	188
QF75-28	MATASF 200	45	4665	3435	195	195	4665	3435	195	195	1230	195	68	188
QF75-30	MATASF 200	45	4891	3661	195	195	4891	3661	195	195	1230	195	73	188
QF75-33	MATASF 200	55	5340	4000	195	195	5340	4000	195	195	1340	195	80	211
QF75-35	MATASF 200	55	5566	4226	195	195	5566	4226	195	195	1340	195	84	211
QF75-37	MATASF 200	55	5792	4452	195	195	5792	4452	195	195	1340	195	89	211

* Maximum diameter of pump with one motor cable.

** Maximum diameter of pump with two motor cable.

Motor type may change as per requirement.

Other type of connection is possible by means of connecting pieces. See page no. 117.

TECHNICAL DATA

SUBMERSIBLE PUMP QF 75


PERFORMANCE TABLE QF 75

MODEL	QF-75			MOTOR RATING [kW] [HP]	DISCHARGE (Q)																									
4x6	6x6	8x6	m³/h		0		5		10		15		20		25		30		35		40		45		50		55		59.8	
1/min.	0	83.3	166.7	250	333.3	416.7	500	583.3	666.7	750	833.3	916.7	996.7																	

<tbl_r cells="24


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 75

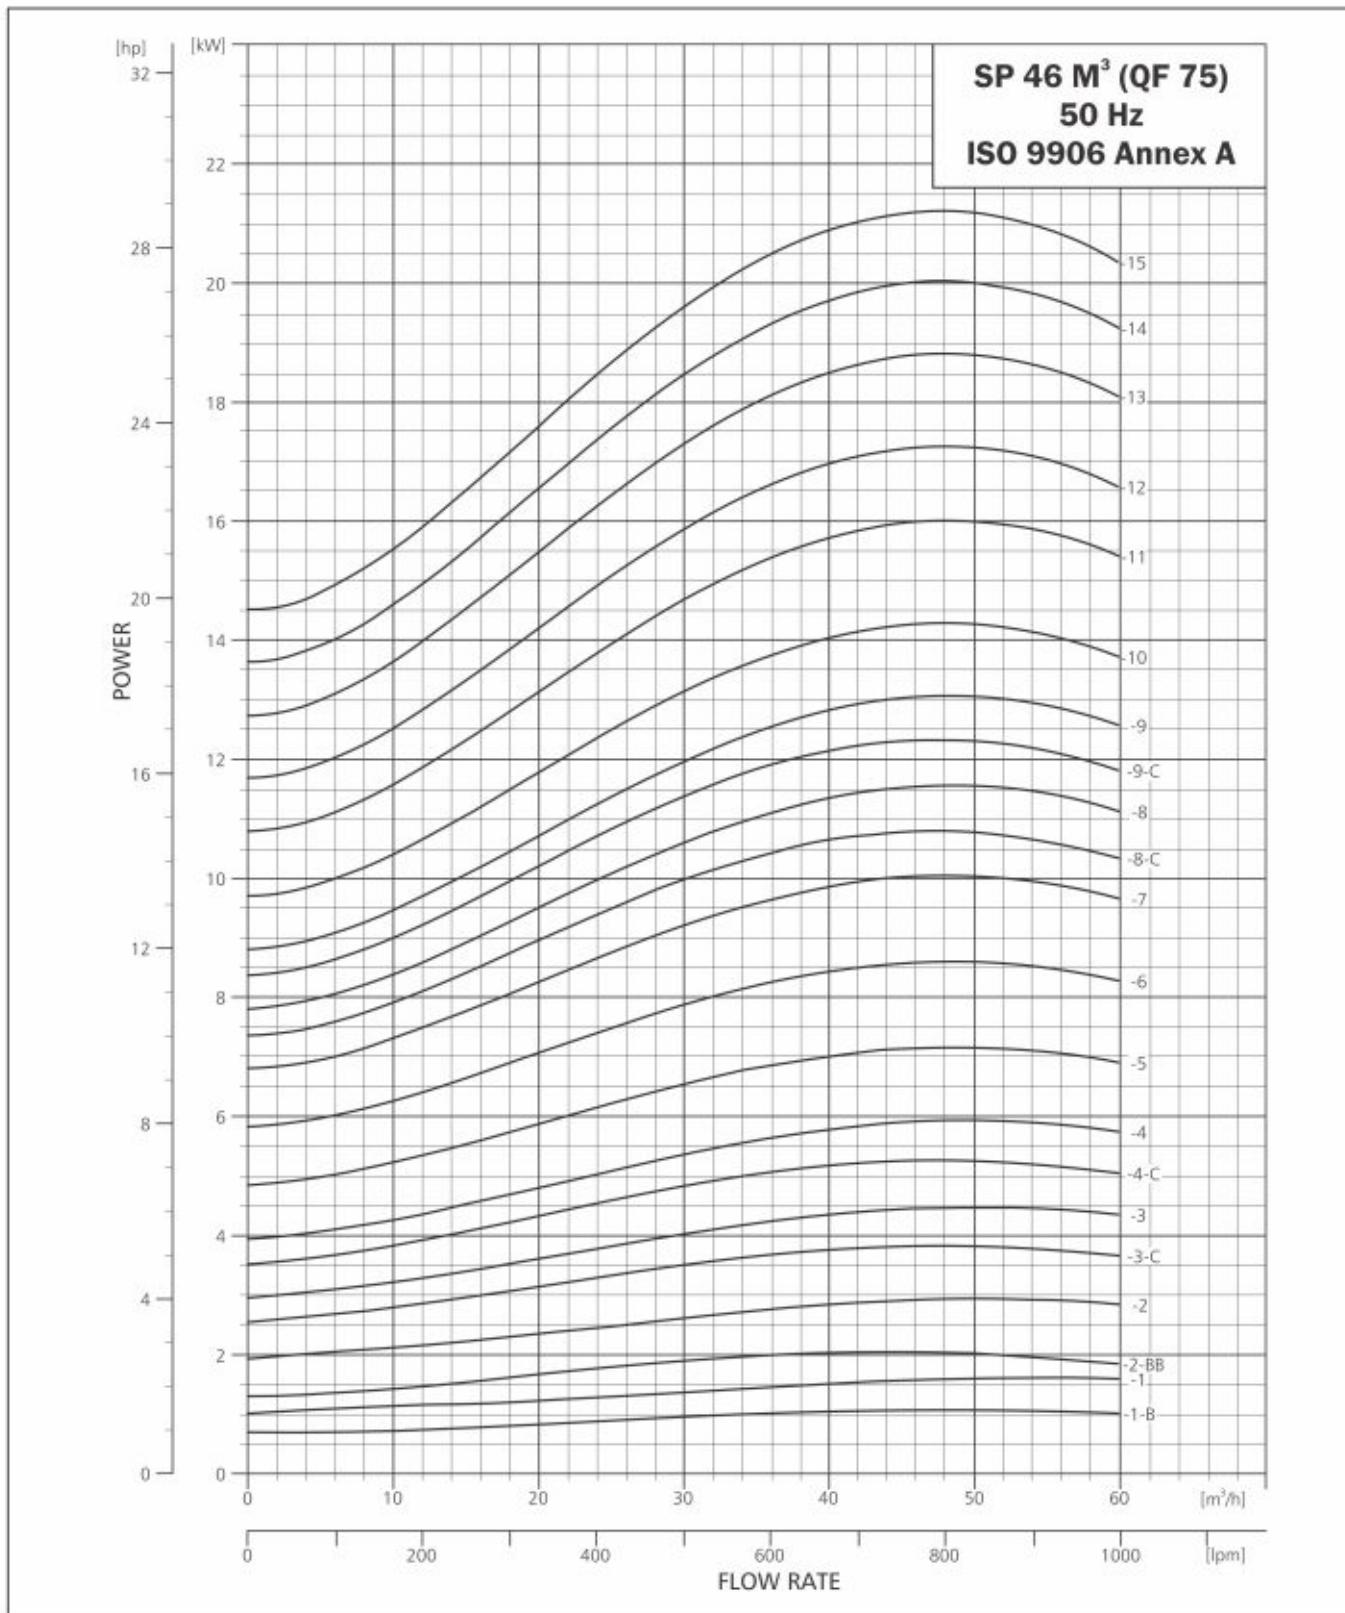


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 75

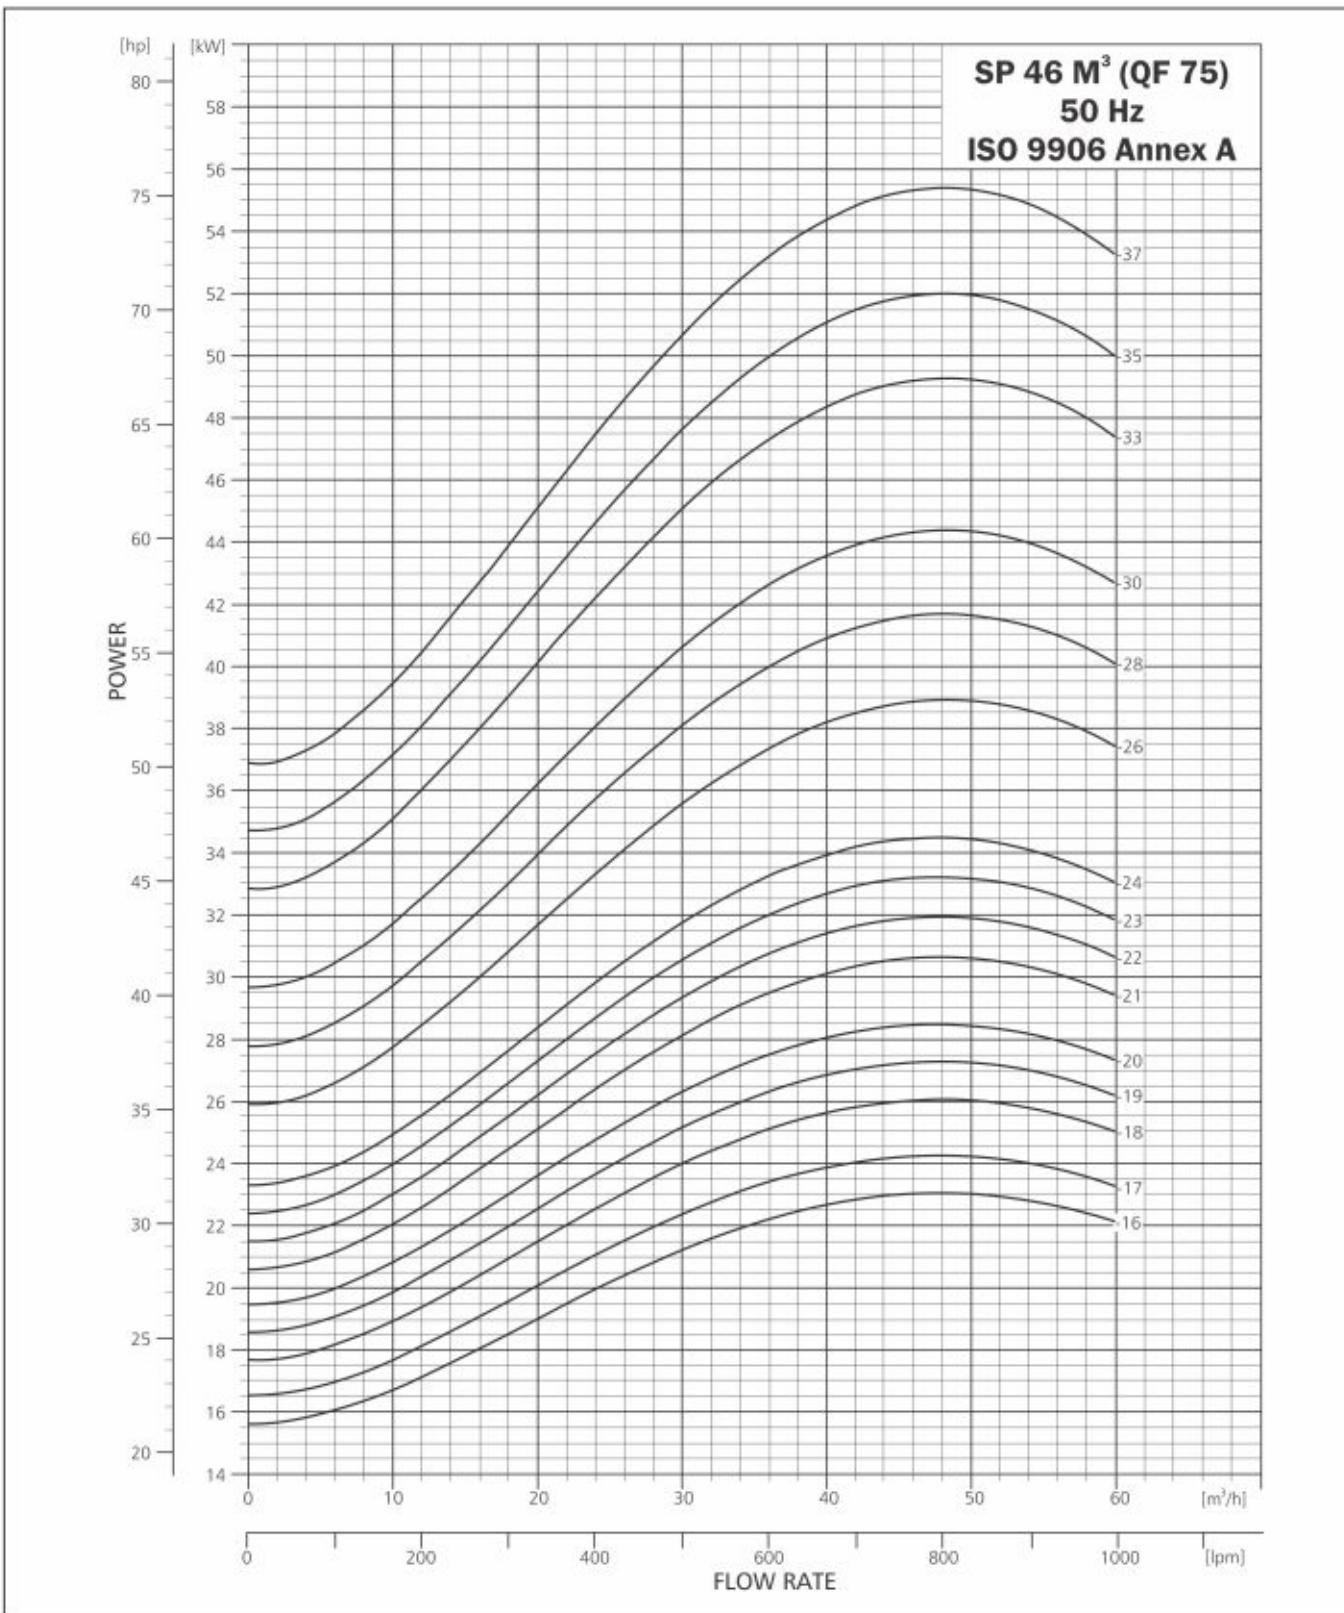


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 100

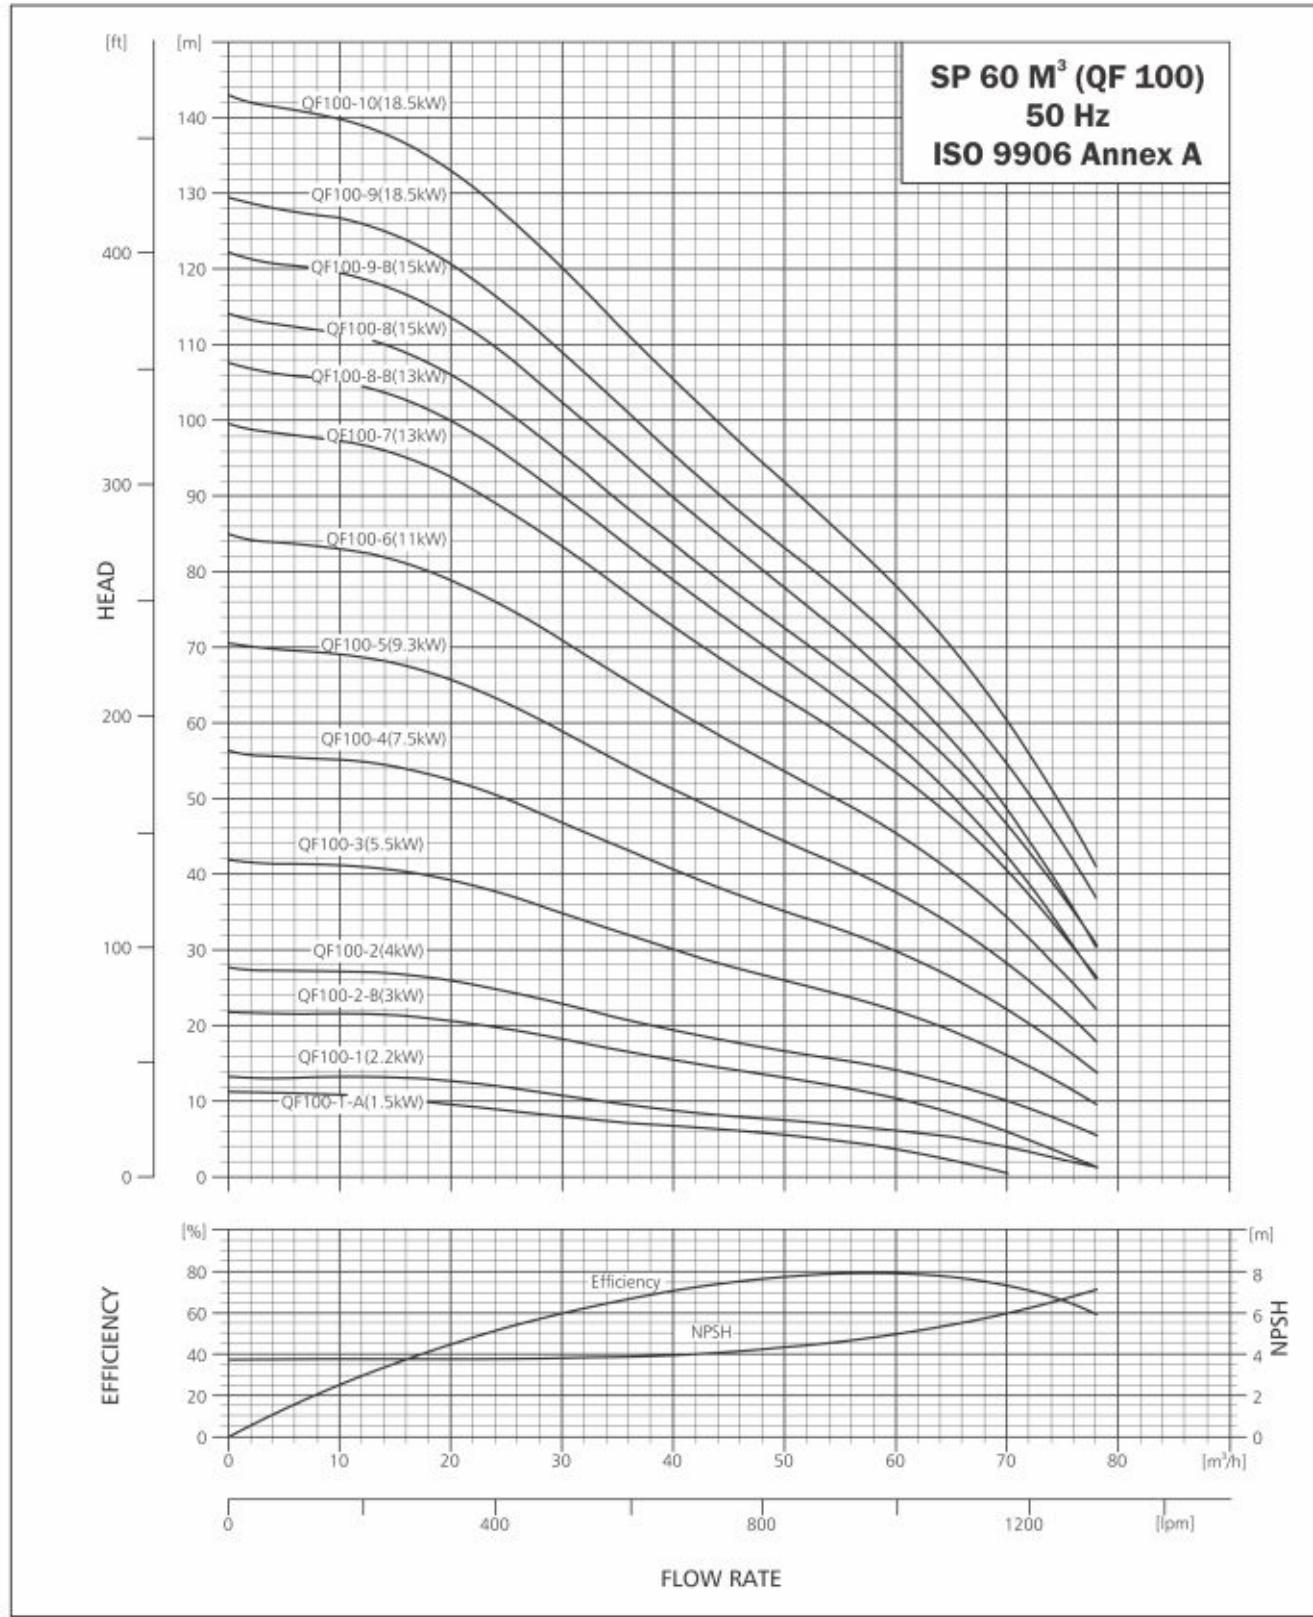

PERFORMANCE CURVE


SUBMERSIBLE PUMP QF 100

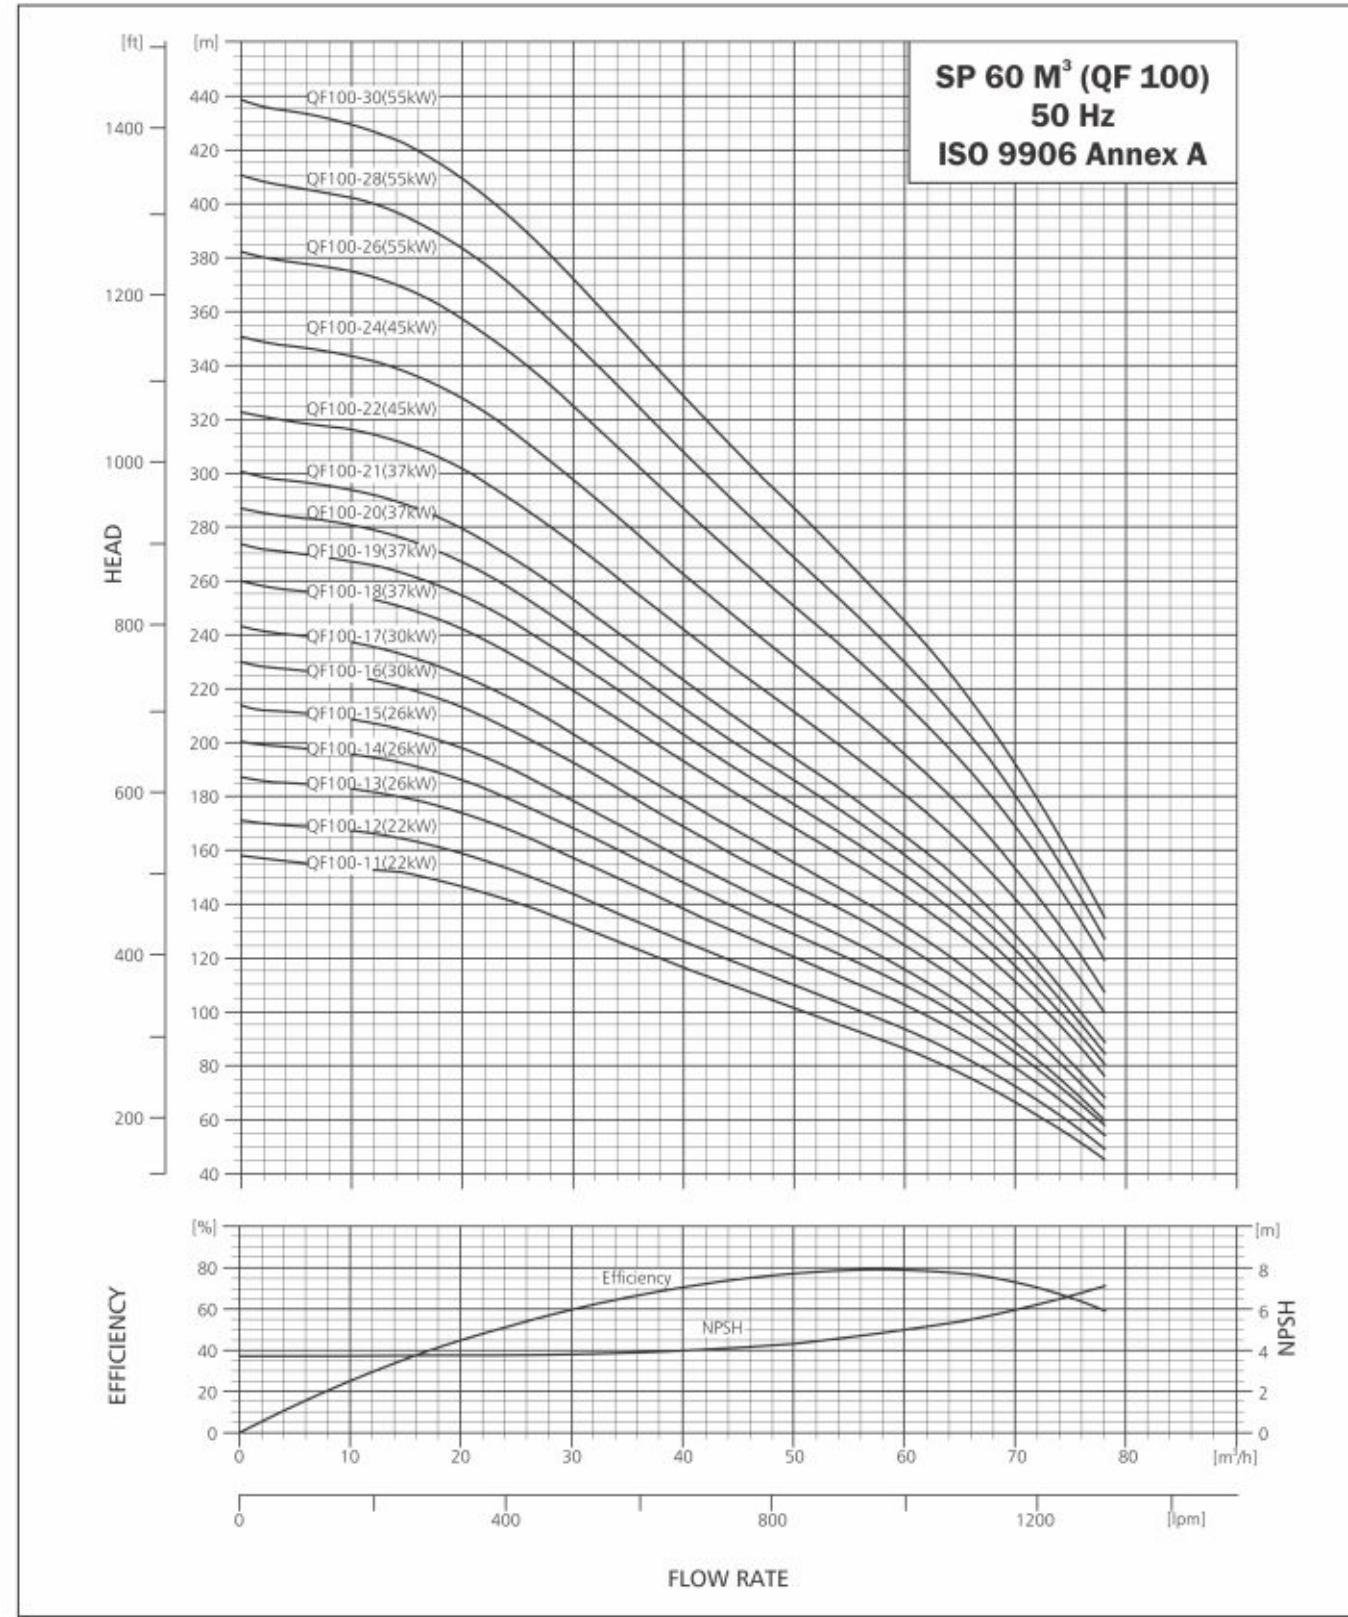

TECHNICAL DATA

SUBMERSIBLE PUMP QF 100

DIMENSIONS AND WEIGHTS

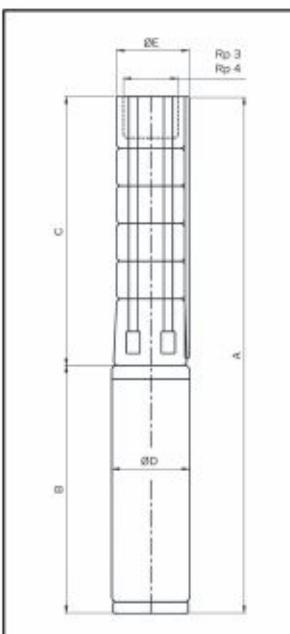

E = Maximum diameter of pump inclusive of cable guard & motor.

PUMP TYPE	MOTOR		DIMENSIONS (MM)								NET WEIGHT (KG)			
	TYPE	POWER (kW)	RP 3" CONNECTION				RP 4" CONNECTION				B	D	PUMP	MOTOR
			A	C	E*	E**	A	C	E*	E**				
QF 100-1-A	PREMIUM 100	1.5	707	367	150	-	707	367	150	-	340	95	6	13
QF100-1	PREMIUM 100	2.2	772	367	150	-	772	367	150	-	405	95	6	15
QF100-2-B	PREMIUM 100	3	962	480	150	-	962	480	150	-	482	95	8	17
QF100-2	PREMIUM 101	4	1059	480	150	-	1059	480	150	-	579	95	8	23
QF100-3	PREMIUM 101	5.5	1286	593	150	-	1286	593	150	-	693	95	11	29
QF100-4	PREMIUM 101	7.5	1476	706	150	-	1476	706	150	-	770	145	13	33
QF100-3	MATASF 150	5.5	1309	610	150	-	1309	610	150	-	699	145	11	48
QF100-4	MATASF 150	7.5	1442	723	150	-	1442	723	150	-	719	145	13	50
QF100-5	MATASF 150	9.3	1585	836	150	155	1585	836	150	155	749	145	15	53
QF100-6	MATASF 150	11	1728	949	150	155	1728	949	150	155	779	145	17	56
QF100-7	MATASF 150	13	1891	1062	150	155	1891	1062	150	155	829	145	20	61
QF100-8-B	MATASF 150	13	2004	1175	150	155	2004	1175	150	155	829	145	22	61
QF100-8	MATASF 150	15	2049	1175	150	155	2049	1175	150	155	874	145	22	66
QF100-9-B	MATASF 150	15	2162	1288	150	155	2162	1288	150	155	874	145	24	66
QF100-9	MATASF 150	18.5	2207	1288	150	155	2207	1288	150	155	919	145	24	70
QF100-10	MATASF 150	18.5	2320	1401	150	155	2320	1401	150	155	919	145	26	70
QF100-11	MATASF 150	22	2523	1514	150	155	2523	1514	150	155	1009	145	29	79
QF100-12	MATASF 150	22	2636	1627	150	155	2636	1627	150	155	1009	145	31	79
QF100-13	MATASF 150	26	2854	1740	150	155	2854	1740	150	155	1114	145	33	90
QF100-14	MATASF 150	26	2967	1853	150	155	2967	1853	150	155	1114	145	35	90
QF100-15	MATASF 150	26	3080	1966	150	155	3080	1966	150	155	1114	145	38	90
QF100-16	MATASF 150	30	3293	2079	150	155	3293	2079	150	155	1214	145	40	100
QF100-17	MATASF 150	30	3406	2192	150	155	3406	2192	150	155	1214	145	42	100
QF100-16	MATASF 200	30	3219	2079	195	195	3219	2079	195	195	1140	195	40	172
QF100-17	MATASF 200	30	3332	2192	195	195	3332	2192	195	195	1140	195	42	172
QF100-18	MATASF 200	37	3445	2305	195	195	3445	2305	195	195	1140	195	44	172
QF100-19	MATASF 200	37	3558	2418	195	195	3558	2418	195	195	1140	195	47	172
QF100-20	MATASF 200	37	3671	2531	195	195	3671	2531	195	195	1140	195	49	172
QF100-21	MATASF 200	37	3784	2644	195	195	3784	2644	195	195	1140	195	51	172
QF100-22	MATASF 200	45	3987	2757	195	195	3987	2757	195	195	1230	195	53	188
QF100-24	MATASF 200	45	4213	2983	195	195	4213	2983	195	195	1230	195	58	188
QF100-26	MATASF 200	55	4549	3209	195	195	4549	3209	195	195	1340	195	62	211
QF100-28	MATASF 200	55	4775	3435	195	195	4775	3435	195	195	1340	195	67	211
QF100-30	MATASF 200	55	5001	3661	195	195	5001	3661	195	195	1340	195	71	211

* Maximum diameter of pump with one motor cable.

** Maximum diameter of pump with two motor cable.

Motor type may change as per requirement.

Other type of connection is possible by means of connecting pieces. See page no. 117.


TECHNICAL DATA

SUBMERSIBLE PUMP QF 100

QF-100			DISCHARGE (Q)									
			m³/h	0	10	20	30	40	50	60	70	78
	DISCHARGE (Q)								TOTAL HEAD IN (m)			
	l/min.	0	166.7	333.3	500	666.7	833.3	1000	1166.7	1300		
MODEL	4x6	6x6	8x6	[kW]	[HP]							
QF 100 1-A	9000003229	-	-	1.5	2	12	11	9	8	7	5	4
QF 100 - 1	9000003179	9000017915	-	2.2	3	13	14	13	11	9	7	6
QF 100 -2-B	9000003241	-	-	3	4	22	22	21	18	15	13	10
QF 100 - 2	9000003181	9000003231	-	4	5.5	28	27	26	23	19	17	14
QF 100 - 3	9000011341	9000003244	-	5.5	7.5	42	41	39	35	30	26	22
QF 100 - 4	9000003184	9000003249	-	7.5	10	56	55	52	47	41	35	30
QF 100 - 5	-	9000003251	-	9.3	12.5	71	69	66	59	51	44	38
QF 100												


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 100

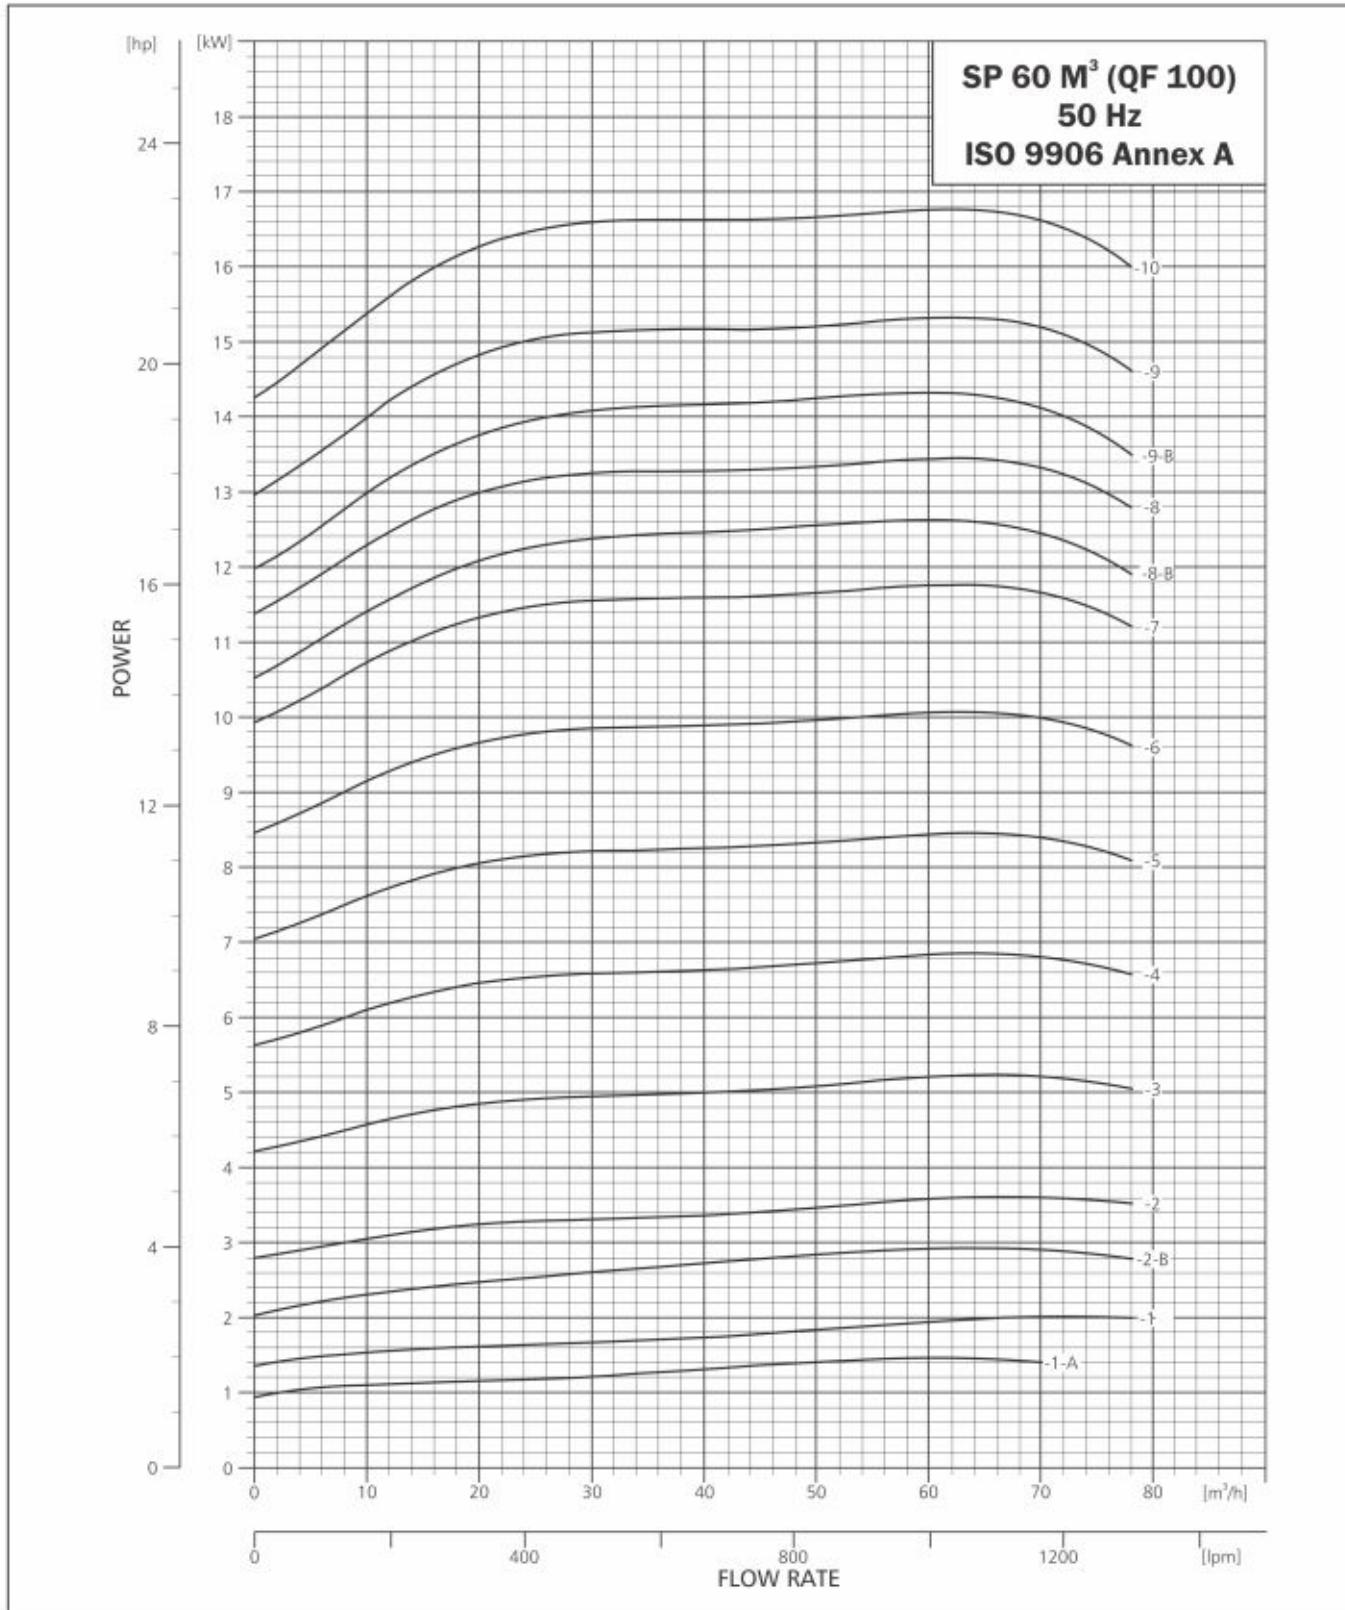


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 100

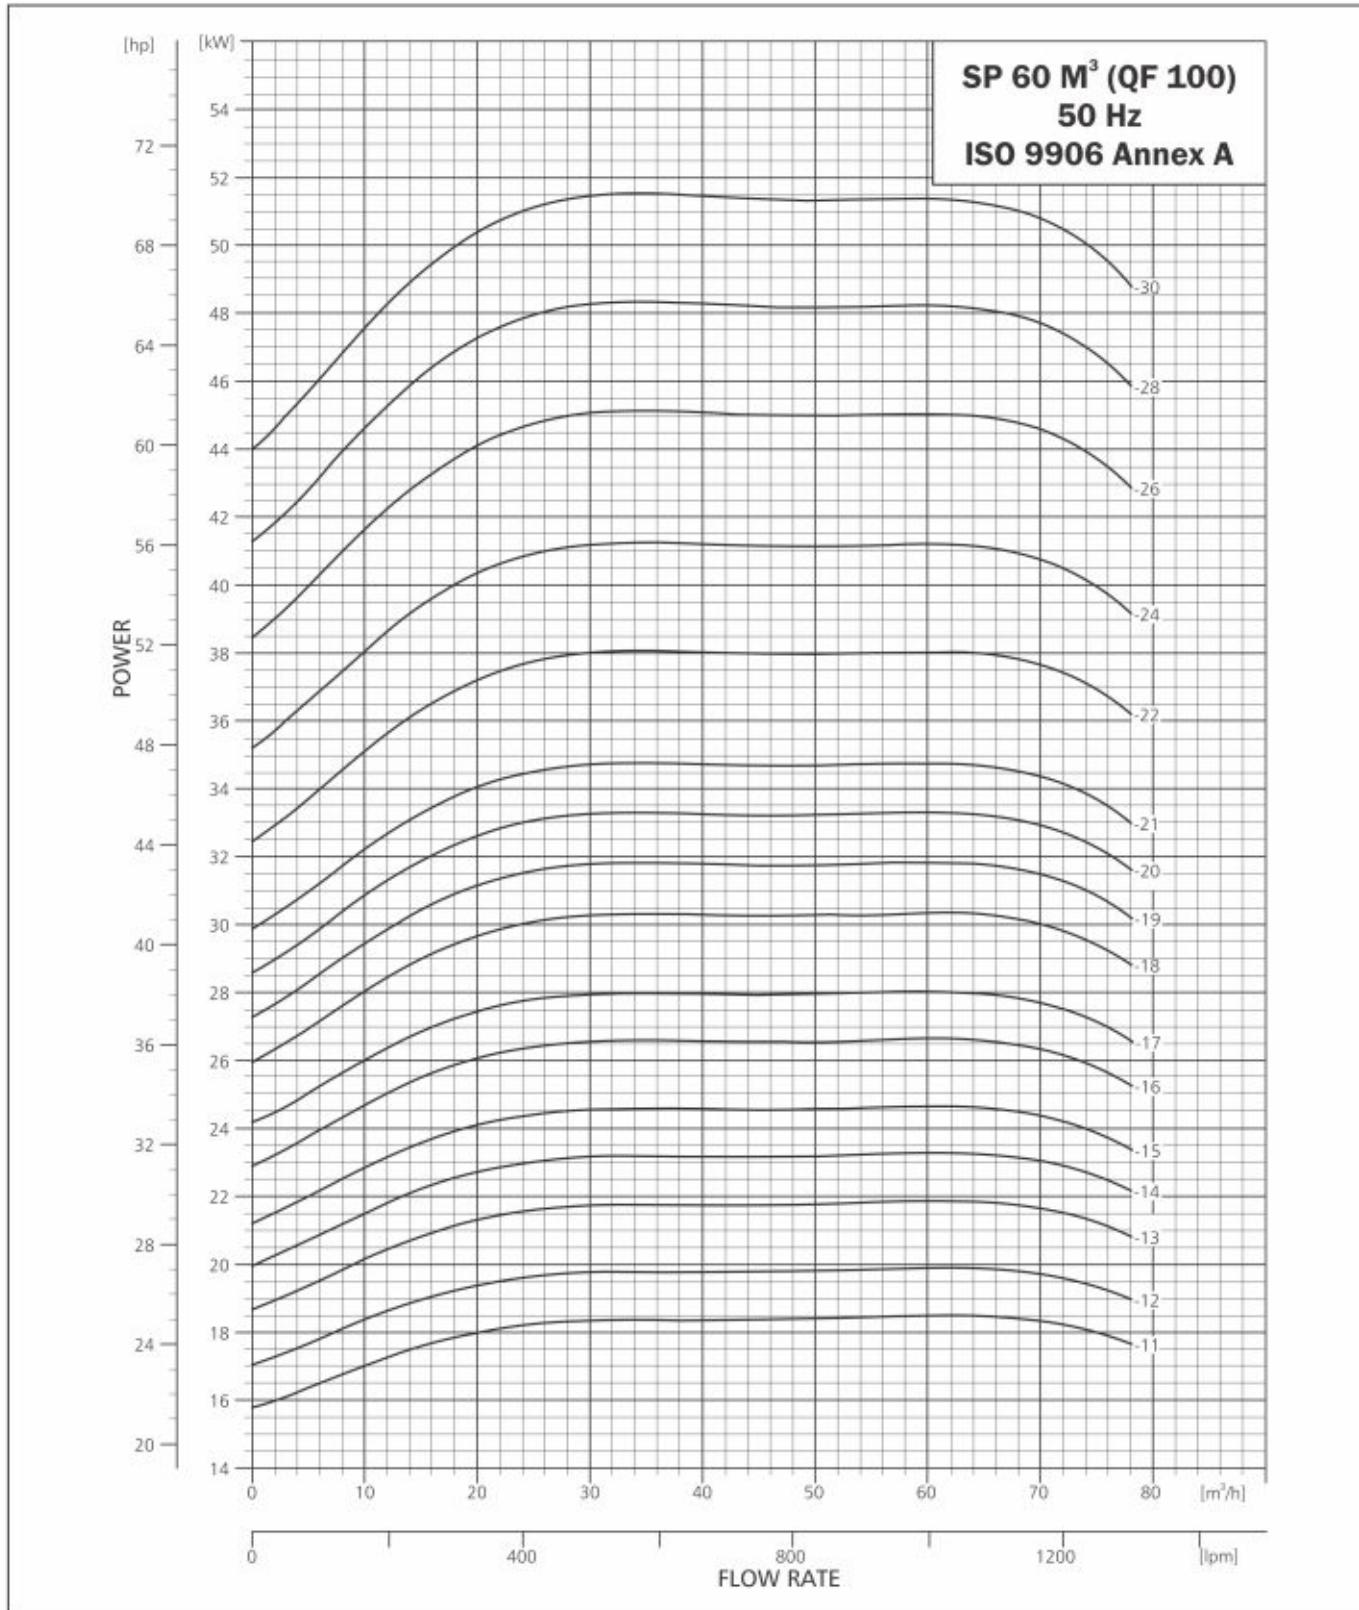


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 125

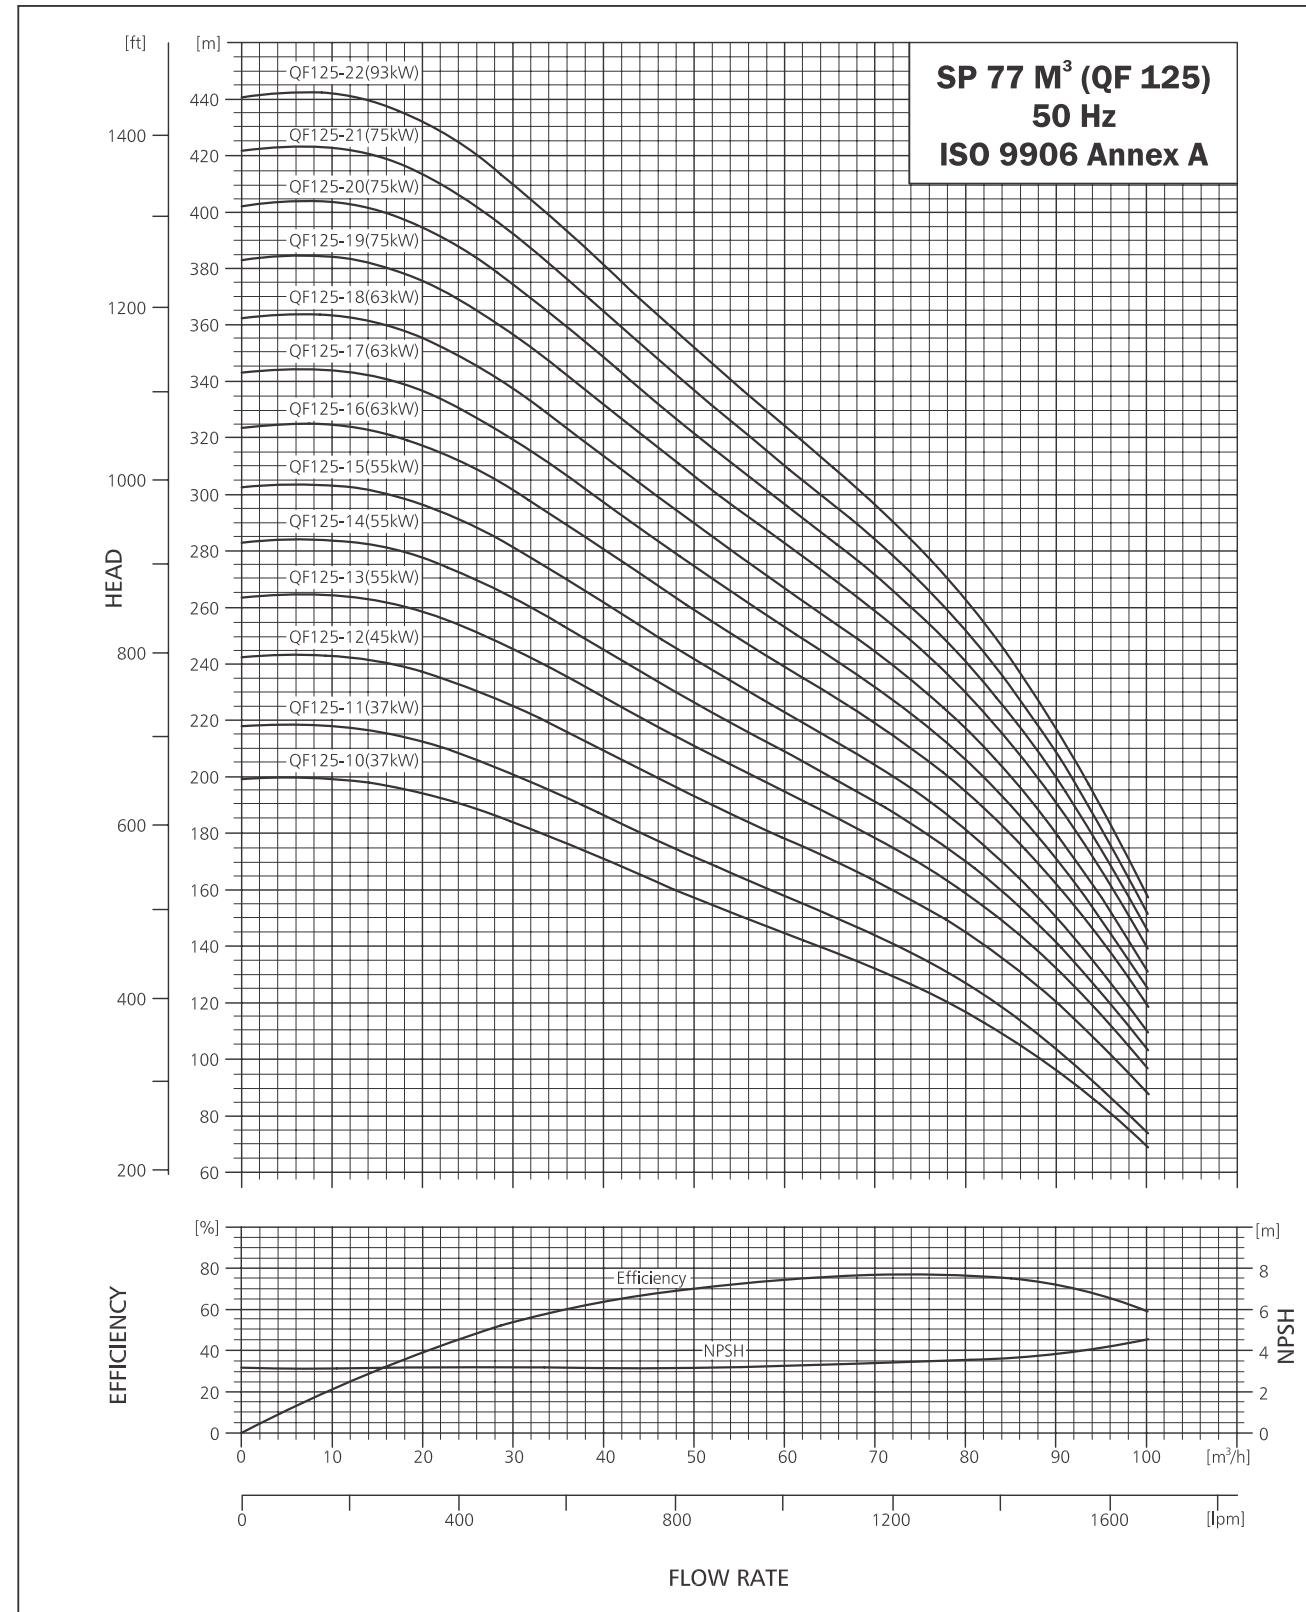

PERFORMANCE CURVE


SUBMERSIBLE PUMP QF 125

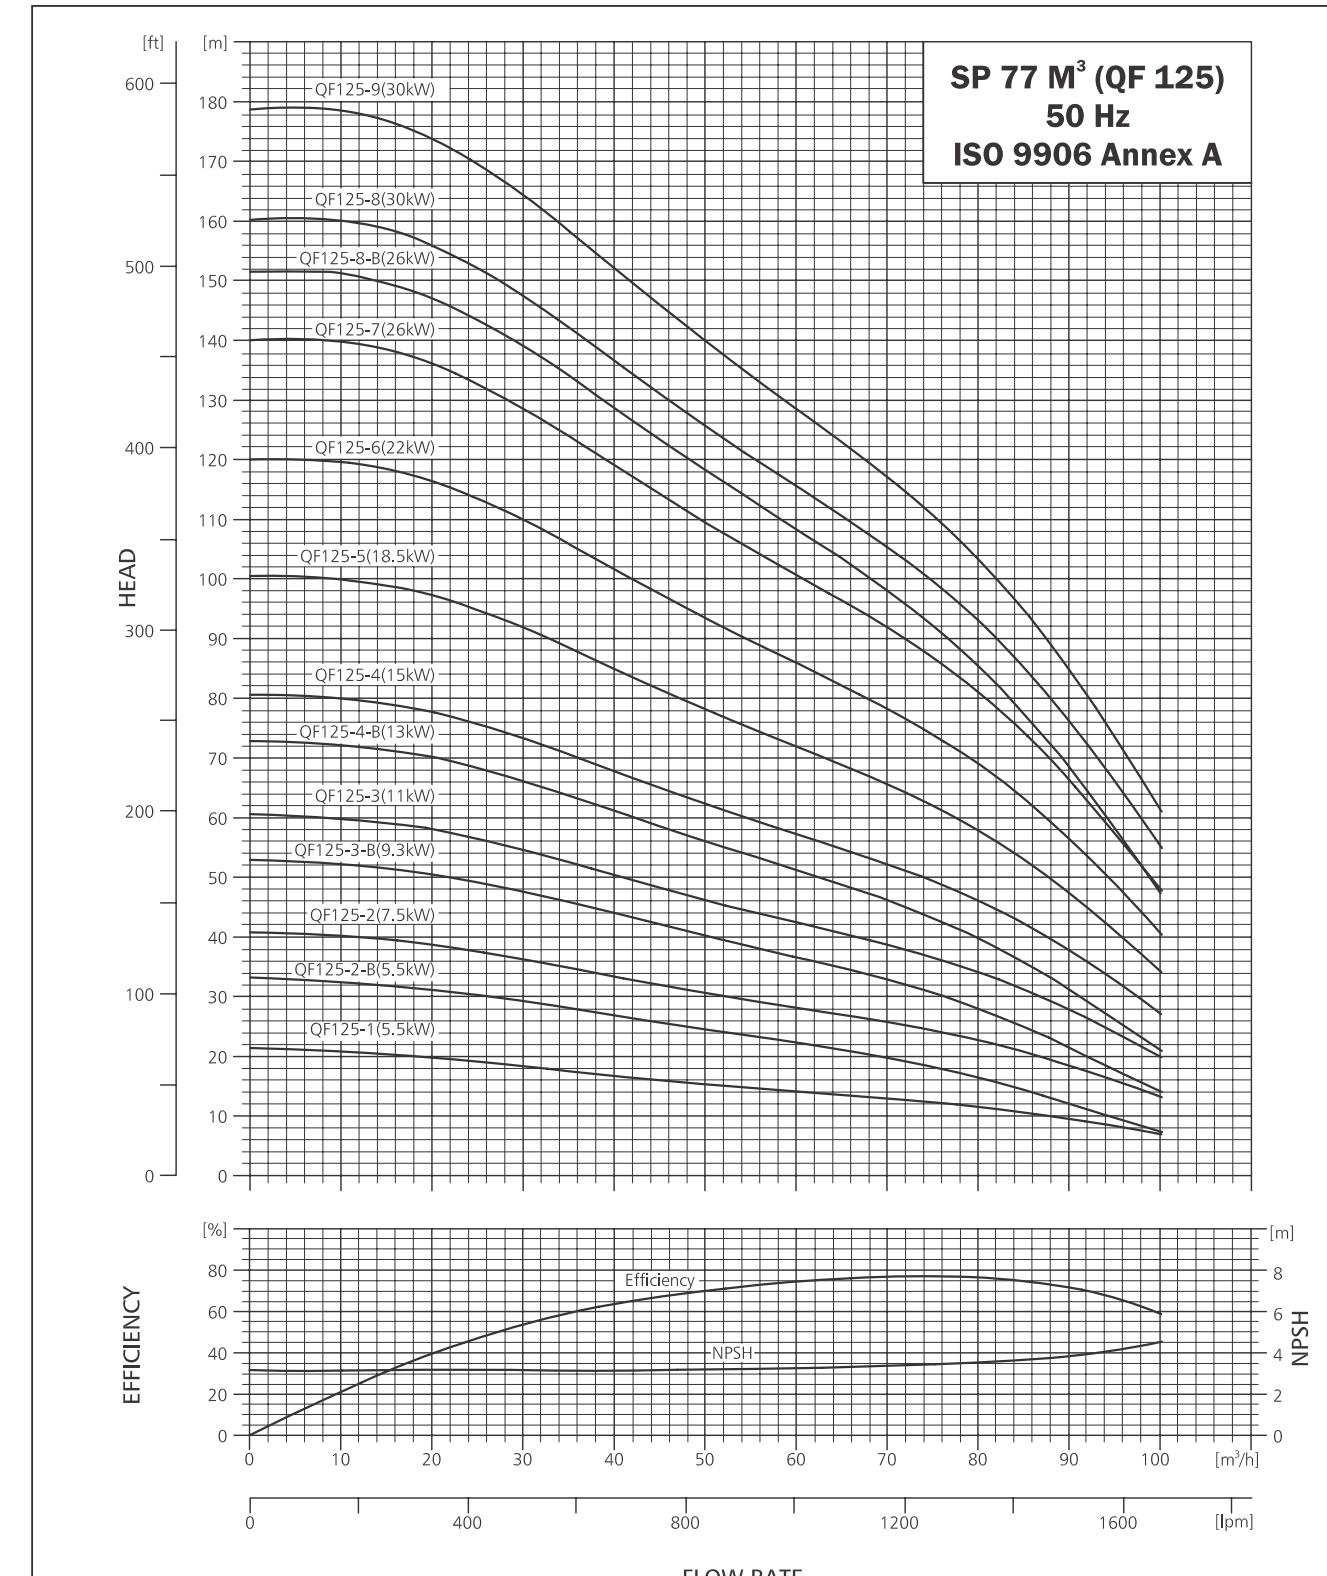

TECHNICAL DATA

SUBMERSIBLE PUMP QF 125

DIMENSIONS AND WEIGHTS

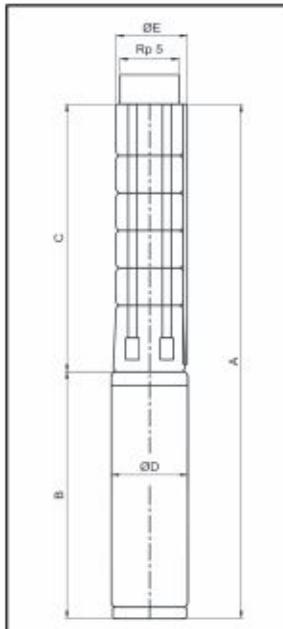

E = Maximum diameter of pump inclusive of cable guard & motor.

TECHNICAL DATA QF 125

PUMP TYPE	MOTOR		DIMENSIONS (MM)								NET WEIGHT (KG)			
	TYPE	POWER (kW)	RP 5" CONNECTION				RP 5" FLANGE				PUMP	MOTOR		
			A	C	E*	E**	A	C	E*	E**				
QF125-1	MATASF150	5.5	1325	626	178	186	1325	626	180	185	699	142	21	48
QF125-2-B	MATASF150	5.5	1453	754	178	186	1453	754	180	185	699	142	24	48
QF125-2	MATASF150	7.5	1473	754	178	186	1473	754	180	185	719	142	24	50
QF125-3-B	MATASF150	9.3	1631	882	178	186	1631	882	180	185	749	142	28	53
QF125-3	MATASF150	11	1661	882	178	186	1661	882	180	185	779	142	28	56
QF125-4-B	MATASF150	13	1839	1010	178	186	1839	1010	180	185	829	142	31	61
QF125-4	MATASF150	15	1884	1010	178	186	1884	1010	180	185	874	142	31	66
QF125-5	MATASF150	18.5	2057	1138	178	186	2057	1138	180	185	919	142	35	70
QF125-6	MATASF150	22	2275	1266	178	186	2275	1266	180	185	1009	142	38	79
QF125-7	MATASF150	26	2508	1394	178	186	2508	1394	180	185	1114	142	42	90
QF125-8-B	MATASF150	26	2636	1522	178	186	2636	1522	180	185	1114	142	46	90
QF125-8	MATASF150	30	2736	1522	178	186	2736	1522	180	185	1214	142	46	100
QF125-9	MATASF150	30	2864	1650	178	186	2864	1650	180	185	1214	142	49	100
QF125-8	MATASF200	30	2662	1522	200	205	2662	1522	210	210	1140	195	46	140
QF125-9	MATASF200	30	2790	1650	200	205	2790	1650	210	210	1140	195	50	140
QF125-10	MATASF200	37	2918	1778	200	205	2918	1778	210	210	1140	195	53	140
QF125-11	MATASF200	37	3046	1906	200	205	3046	1906	210	210	1140	195	57	140
QF125-12	MATASF200	45	3264	2034	200	205	3264	2034	210	210	1230	195	60	156
QF125-13	MATASF200	55	3502	2162	200	205	3502	2162	210	210	1340	195	64	179
QF125-14	MATASF200	55	3630	2290	200	205	3630	2290	210	210	1340	195	68	179
QF125-15	MATASF200	55	3758	2418	200	205	3758	2418	210	210	1340	195	71	179
QF125-16	MATASF200	63	4016	2546	200	205	4016	2546	210	210	1470	195	75	198
QF125-17	MATASF200	63	4144	2674	200	205	4144	2674	210	210	1470	195	78	198
QF125-18	MATASF200	63	4272	2802	200	205	4272	2802	210	210	1470	195	82	198
QF125-19	MATASF200	75	4490	2930	200	205	4490	2930	210	210	1560	195	85	215
QF125-20	MATASF200	75	4618	3058	200	205	4618	3058	210	210	1560	195	89	215
QF125-21	MATASF200	75	4746	3186	200	205	4746	3186	210	210	1560	195	93	215

* Maximum diameter of pump with one motor cable.

** Maximum diameter of pump with two motor cable.

Motor type may change as per requirement.

Other type of connection is possible by means of connecting pieces. See page no. 117.

TECHNICAL DATA


SUBMERSIBLE PUMP QF 125

PERFORMANCE TABLE QF 125

MODEL	MATERIAL CODE		MOTOR RATING		DISCHARGE (Q)										
			m³/h	1/min.	0	10	20	30	40	50	60	70	80	90	100
	6x8	8x8	[kW]	[HP]	TOTAL HEAD IN (m)										
QF 125 - 1	9000003280	-	5.5	7.5	21	21	20	18	17	15	14	13	12	10	7
QF 125 - 2-B	9000003301	-	5.5	7.5	33	32	31	29	27	25	22	20	16	12	7
QF 125 - 2	9000003296	-	7.5	10	41	40	39	36	33	31	28	26	23	18	13
QF 125 - 3-B	9000003307	-	9.3	125	53	52	51	48	44	40	37	33	28	22	14
QF 125 - 3	9000003304	-	11	15	61	60	58	55	50	46	42	39	34	28	20
QF 125 - 4-B	9000003310	-	13	18	73	72	70	66	61	56	51	46	40	31	21
QF 125 - 4	9000003308	-	15	20	81	80	78	73	68	62	57	52	46	38	27
QF 125 - 5	9000003311	-	18.5	25	100	100	97	92	85	78	72	66	58	47	34
QF 125 - 6	9000003313	-	22	30	120	120	116	110	102	94	86	78	69	56	41
QF 125 - 7	9000003316	-	26	35	140	140	136	129	119	110	101	92	81	66	48
QF 125 - 8-B	9000003321	-	26	35	152	151	147	139	129	118	108	98	85	68	47
QF 125 - 8	9000003319	9000003320	30	40	160	160	156	147	137	126	116	105	93	76	55
QF 125 - 9	9000003322	9000003323	30	40	179	179	174	164	152	140	129	117	103	85	61
QF 125 - 10	9000008136	9000003282	37	50	200	199	194	184	171	15					


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 125

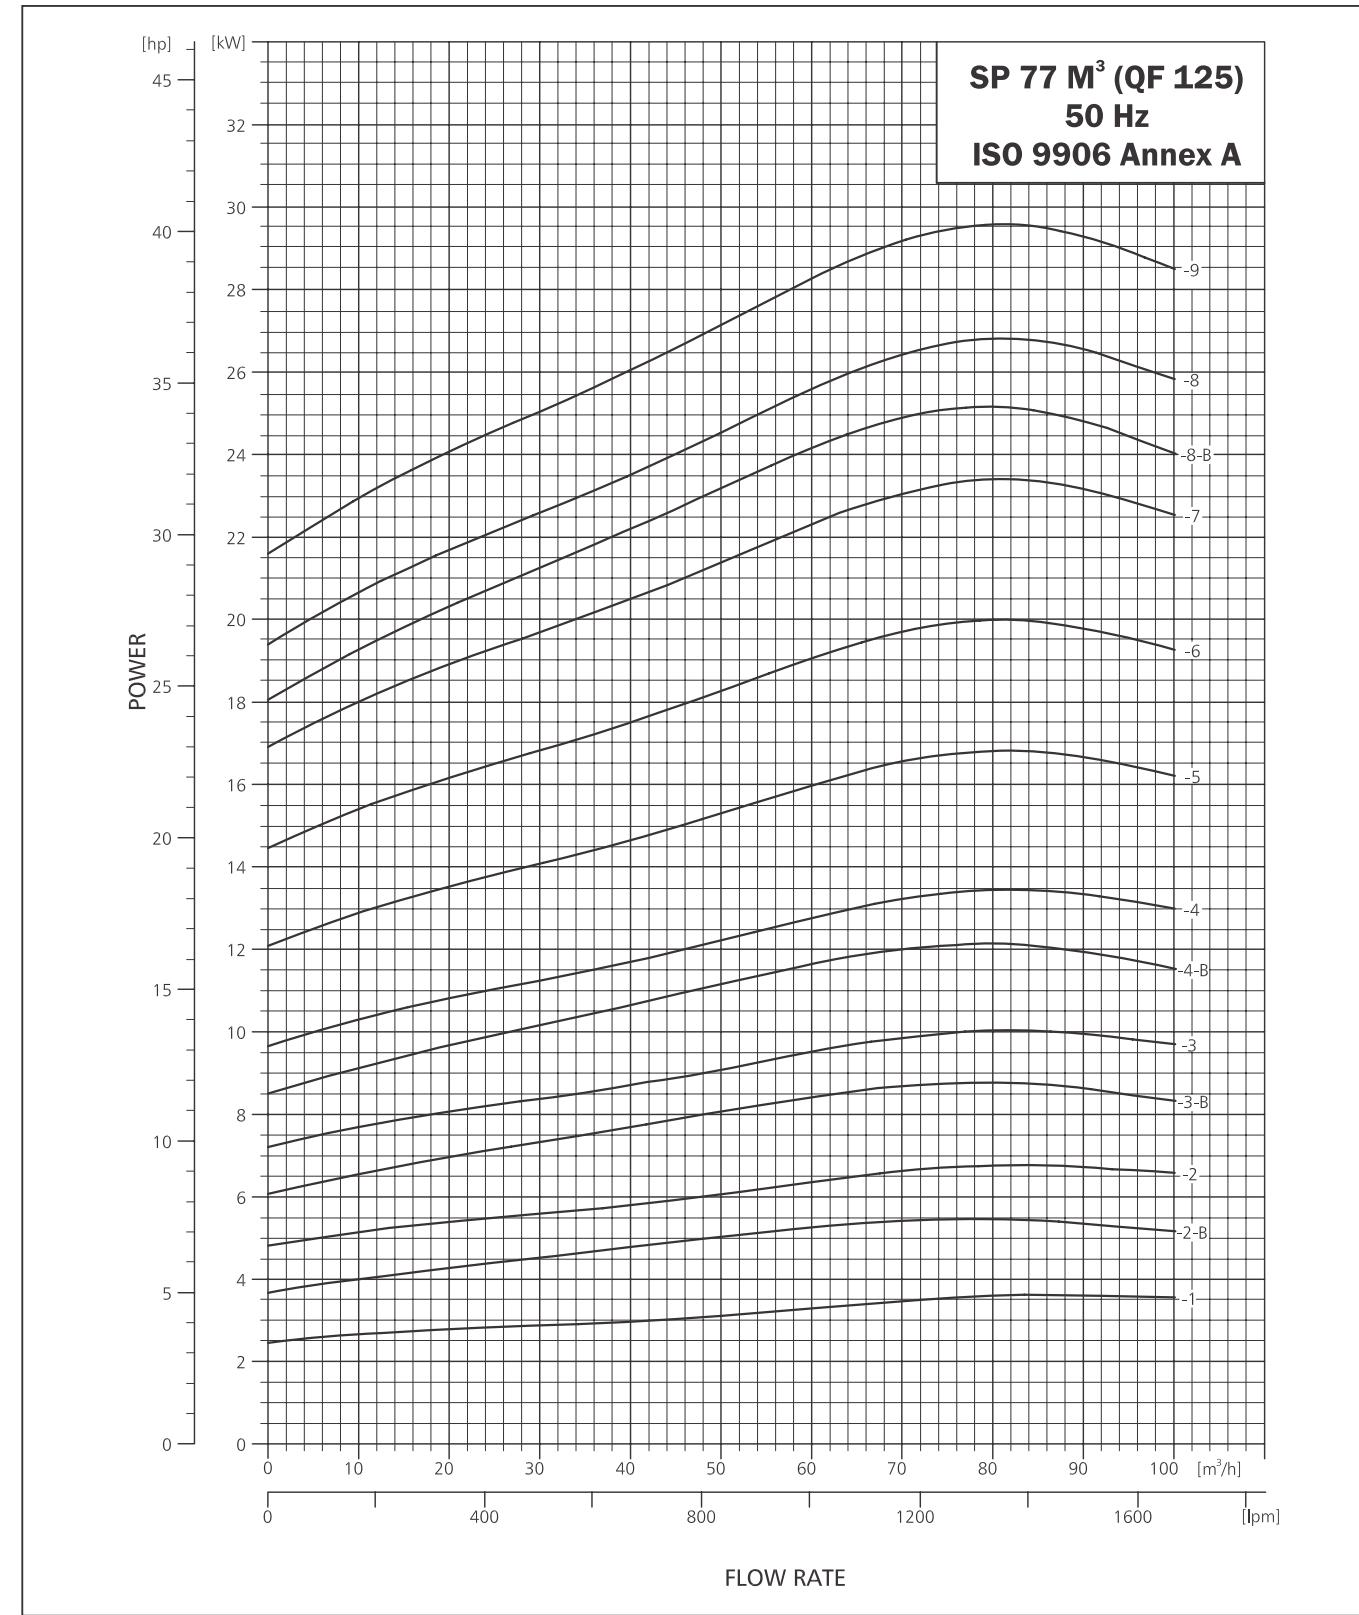


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 125

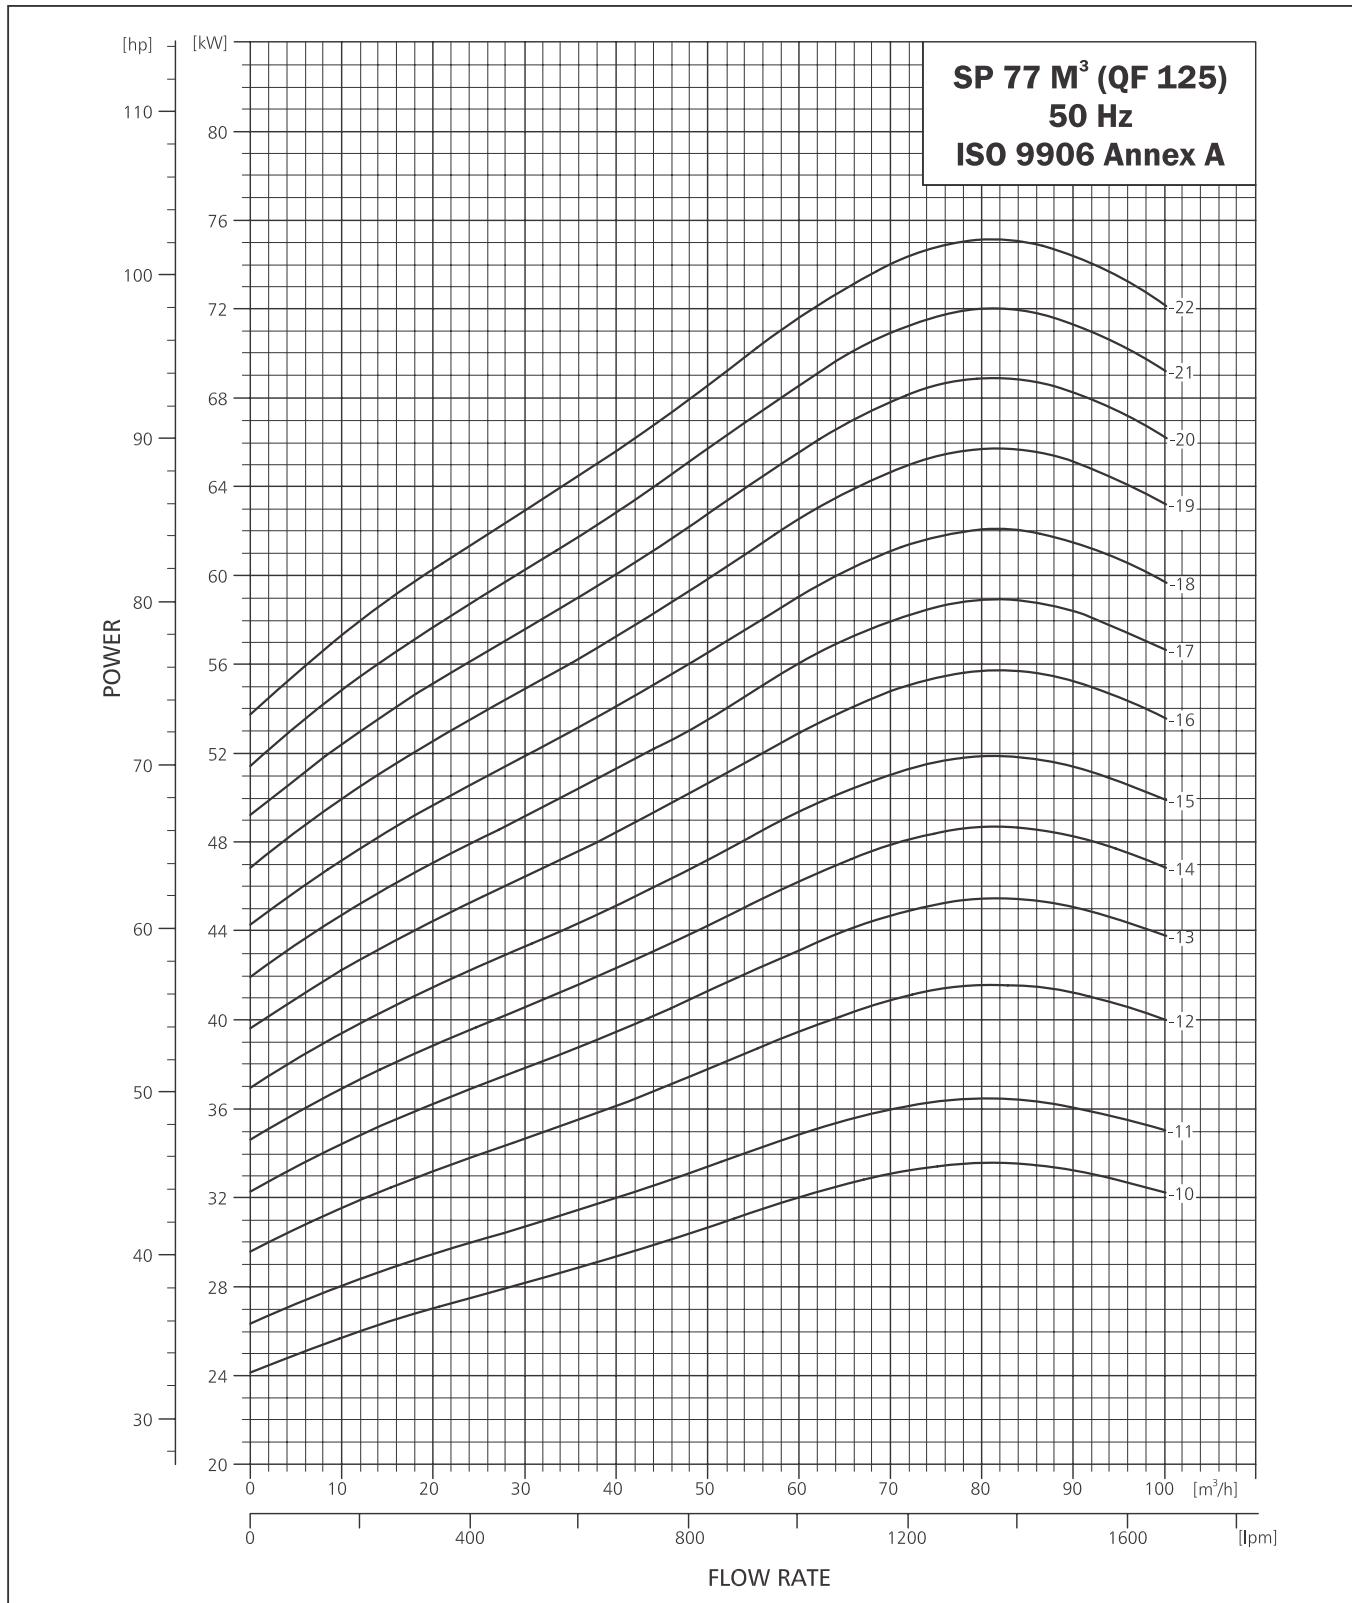


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 160

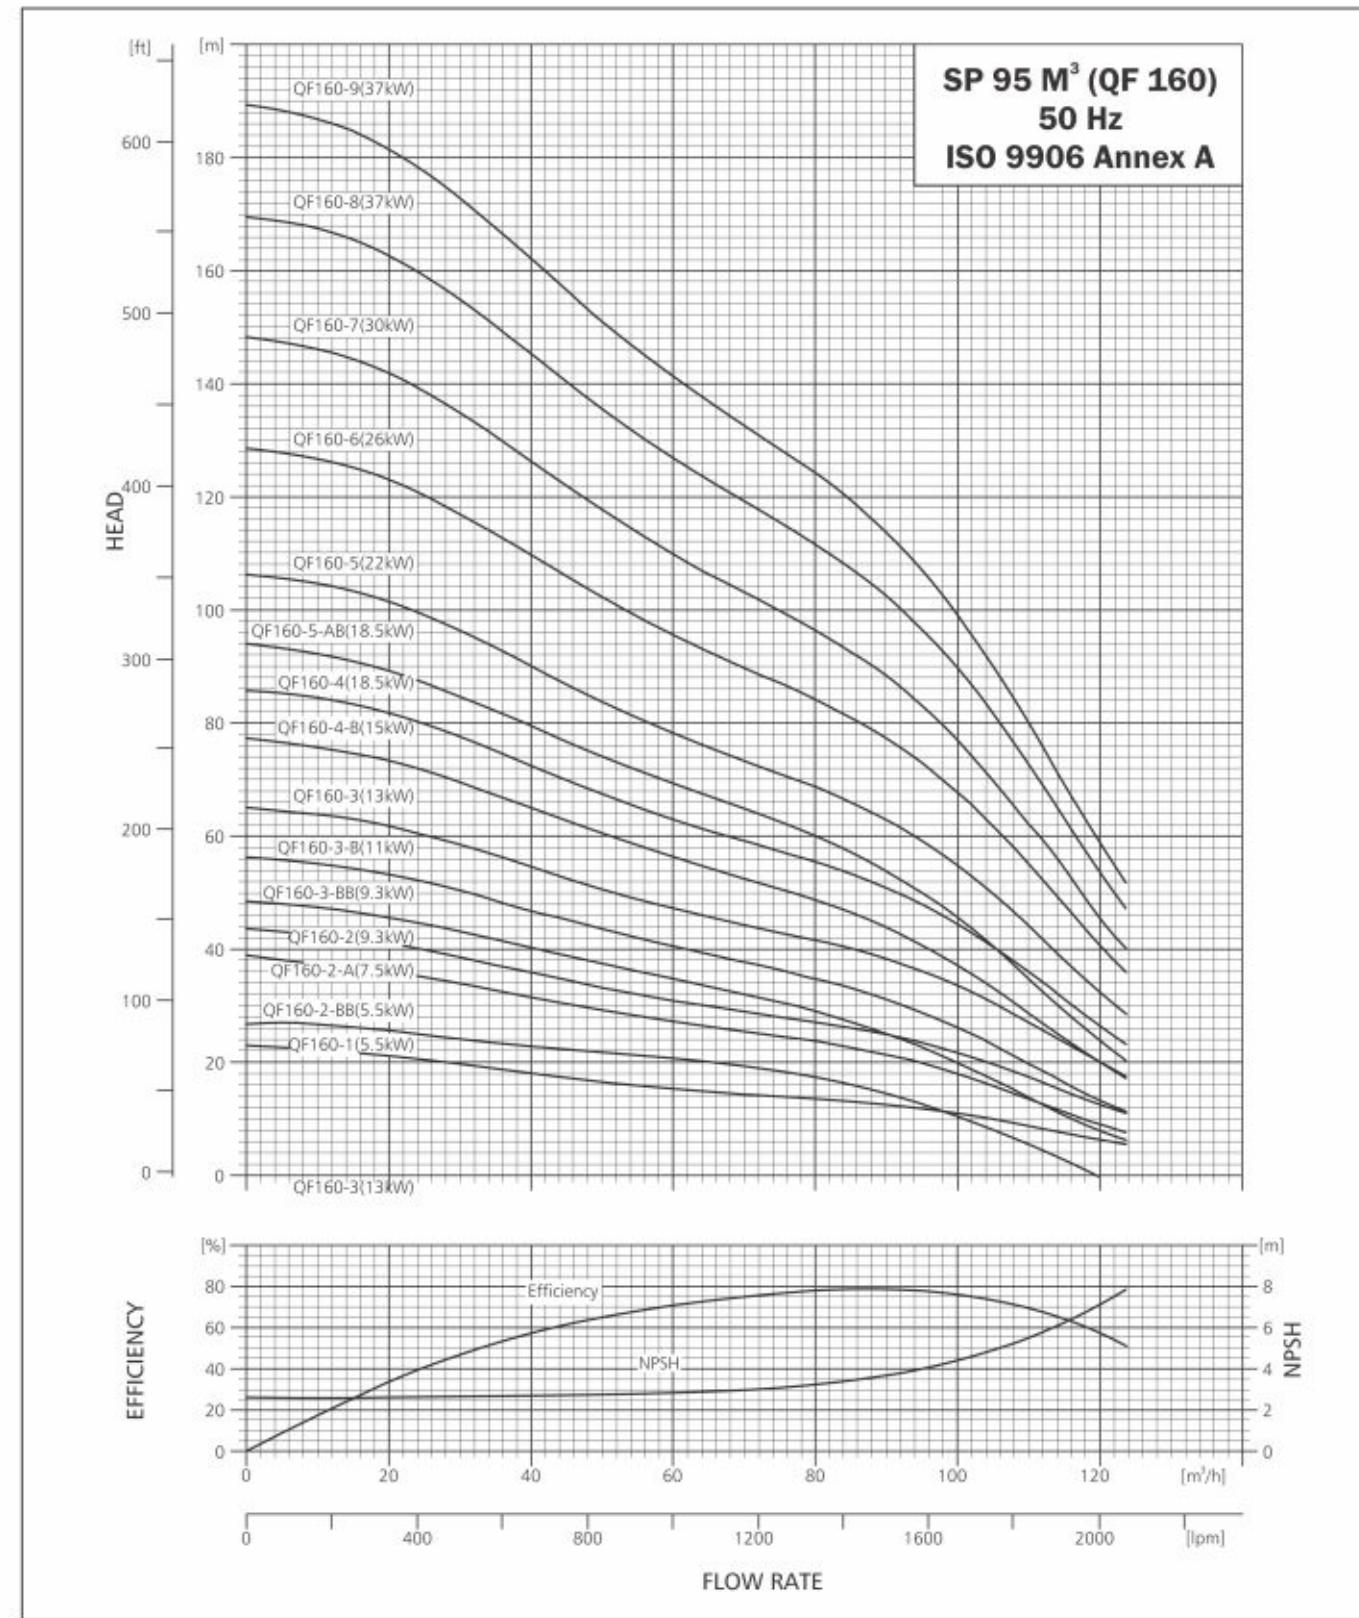

PERFORMANCE CURVE


SUBMERSIBLE PUMP QF 160

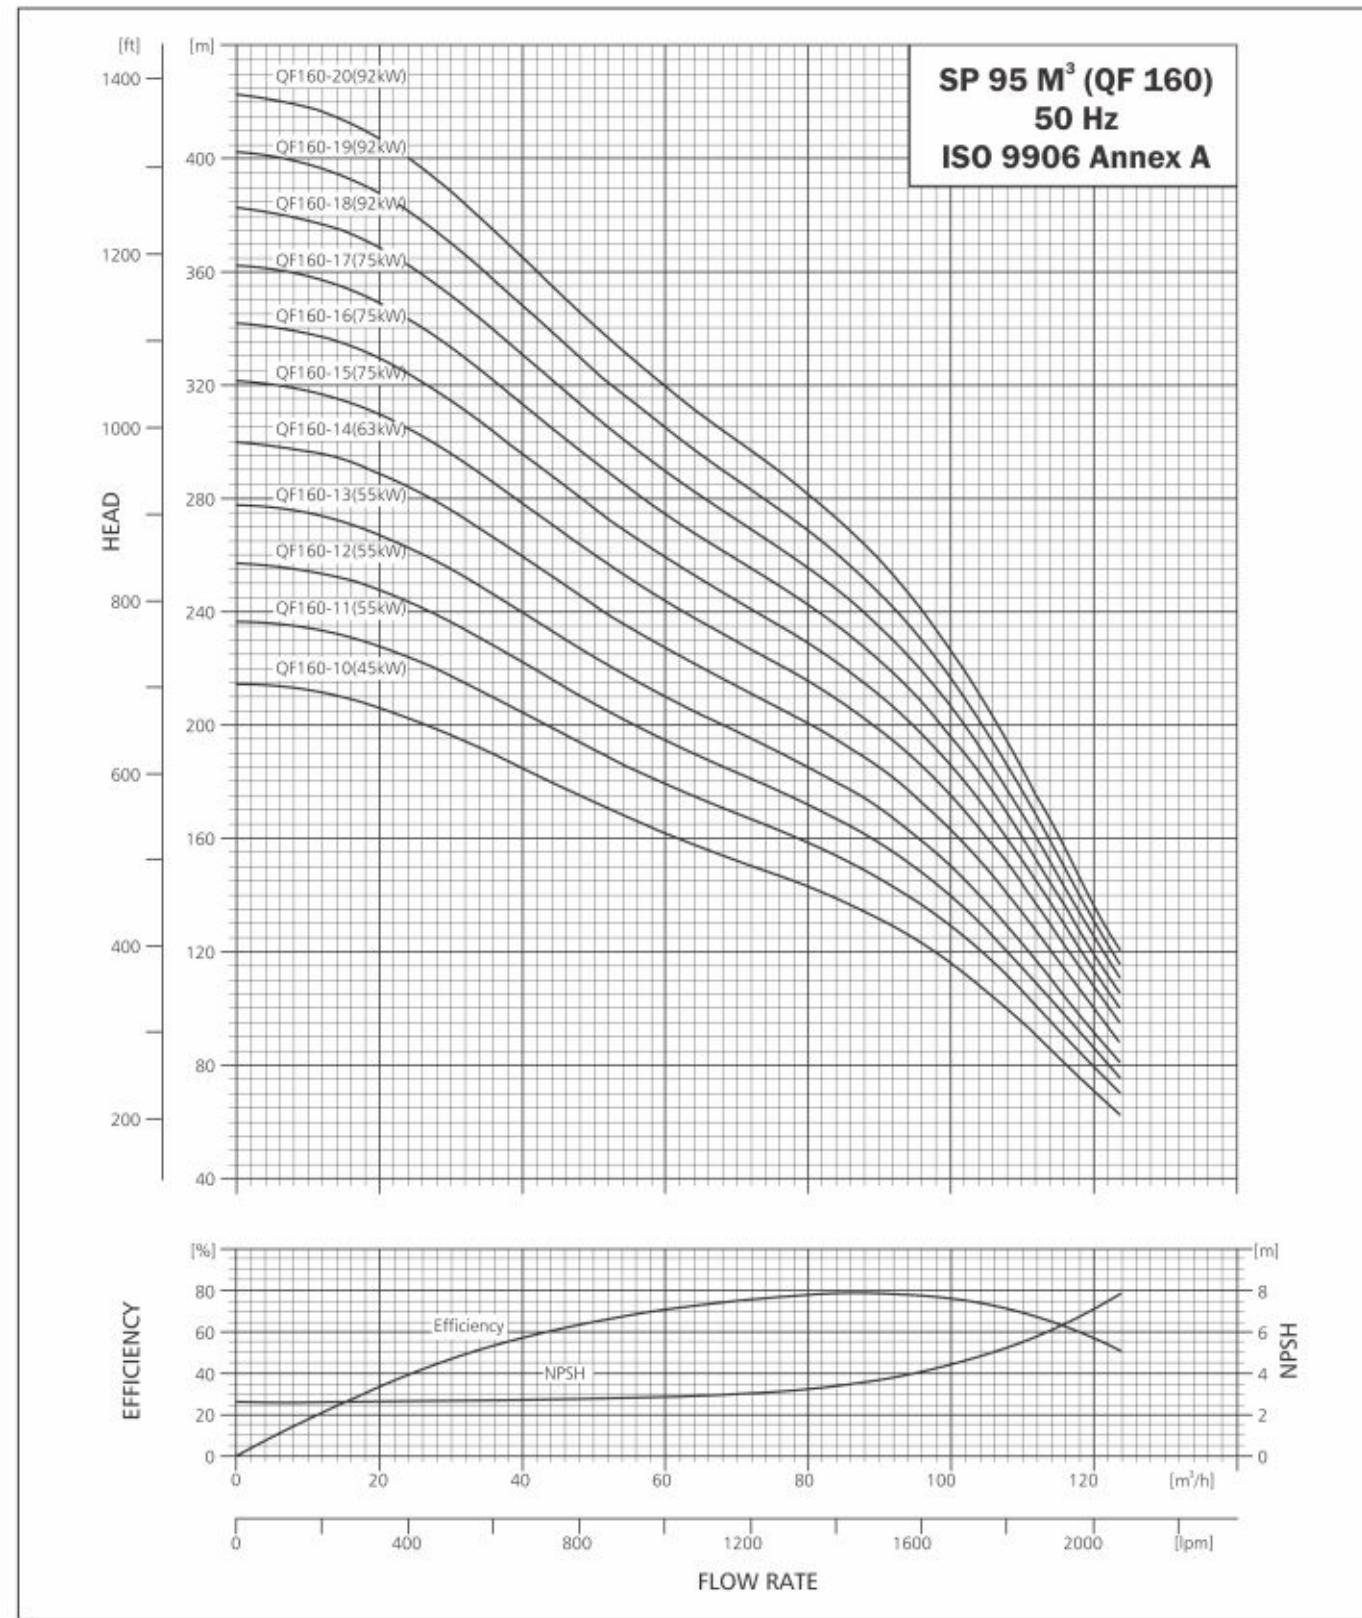

TECHNICAL DATA

SUBMERSIBLE PUMP QF 160

DIMENSIONS AND WEIGHTS

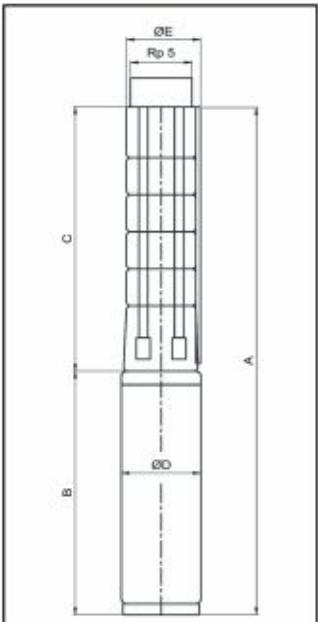

E = Maximum diameter of pump inclusive of cable guard & motor.

PUMP TYPE	MOTOR		DIMENSIONS (MM)								NET WEIGHT (KG)			
	TYPE	POWER (kW)	RP 5" CONNECTION				RP 5" FLANGE				B	D	PUMP	MOTOR
			A	C	E*	E**	A	C	E*	E**				
QF160-1	MATASF150	5.5	1325	626	178	186	1325	626	180	185	699	143	21	48
QF160-2-BB	MATASF150	5.5	1453	754	178	186	1453	754	180	185	699	143	24	48
QF160-2-A	MATASF150	7.5	1453	754	178	186	1453	754	180	185	699	143	24	50
QF160-2	MATASF150	9.3	1503	754	178	186	1503	754	180	185	749	143	24	53
QF160-3-BB	MATASF150	9.3	1631	882	178	186	1631	882	180	185	749	143	28	53
QF160-3-B	MATASF150	11	1661	882	178	186	1661	882	180	185	779	143	28	56
QF160-3	MATASF150	13	1711	882	178	186	1711	882	180	185	829	143	28	61
QF160-4-B	MATASF150	15	1884	1010	178	186	1884	1010	180	185	874	143	31	66
QF160-4	MATASF150	18.5	1929	1010	178	186	1929	1010	180	185	919	143	31	70
QF160-5-AB	MATASF150	18.5	2057	1138	178	186	2057	1138	180	185	919	143	35	70
QF160-5	MATASF150	22	2147	1138	178	186	2147	1138	180	185	1009	143	35	79
QF160-6	MATASF150	26	2380	1266	178	186	2380	1266	180	185	1114	143	38	90
QF160-7	MATASF150	30	2608	1394	178	186	2608	1394	180	185	1214	143	38	100
QF160-7	MATASF200	30	2534	1394	196	204	2534	1394	210	210	1140	195	42	140
QF160-8	MATASF200	37	2662	1522	196	204	2662	1522	210	210	1140	195	46	140
QF160-9	MATASF200	37	2880	1650	196	204	2880	1650	210	210	1230	195	49	140
QF160-10	MATASF200	45	3008	1778	196	204	3008	1778	210	210	1230	195	53	156
QF160-11	MATASF200	55	3246	1906	196	204	3246	1906	210	210	1340	195	56	179
QF160-12	MATASF200	55	3374	2034	196	204	3374	2034	210	210	1340	195	60	179
QF160-13	MATASF200	55	3502	2162	196	204	3502	2162	210	210	1340	195	63	179
QF160-14	MATASF200	63	3760	2290	196	204	3760	2290	210	210	1470	195	67	179
QF160-15	MATASF200	75	3978	2418	196	204	-	-	-	-	1560	195	71	215
QF160-16	MATASF200	75	4106	2546	196	204	-	-	-	-	1560	195	74	215
QF160-17	MATASF200	75	4234	2674	196	204	-	-	-	-	1560	195	78	215
QF160-18	MATASF200	92	4542	2802	196	204	-	-	-	-	1740	195	81	247
QF160-19	MATASF200	92	4670	2930	196	204	-	-	-	-	1740	195	85	247
QF160-20	MATASF200	92	4798	3058	196	204	-	-	-	-	1740	195	88	247

* Maximum diameter of pump with one motor cable.

** Maximum diameter of pump with two motor cable.

Motor type may change as per requirement.

Other type of connection is possible by means of connecting pieces. See page no. 117.

TECHNICAL DATA


SUBMERSIBLE PUMP QF 160

PERFORMANCE TABLE QF 160

MODEL	QF-160		DISCHARGE (Q)												
			m³/h	0	10	20	30	40	50	60	70	80	90	100	110
	6x8	8x8	1/min.	0	167	333	500	667	833	1000	1167	1333	1500	1667	1833
QF160-1	9000003326	-	5.5	7.5	23	22	21	20	18	17	15	14	13	13	11
QF160-2-BB	9000003353	-	5.5	7.5	27	27	26	24	23	22	21	19	17	14	10
QF160-2-A	9000003347	-	7.5	10	39	37	36	34	32	29	27	26	24	21	18
QF160-2	9000003345	-	9.3	12.5	44	43	41	39	36	33	31	29	27	25	22
QF160-3-BB	9000003358	-	9.3	12.5	49	47	46	43	40	37	35	32	29	25	20
QF160-3-B	9000003357	-	11	15	56	55	53	50	47	44	41	38	35	31	26
QF160-3	9000003355	-	13	17.5	65	64	62	58	55	51	47	44	42	38	33
QF160-4-B	9000003363	-	15	20	77	76	73	70	65	60	56	53	49	44	37
QF160-4	9000003360	-	18.5	25	86	84	82	78	73	67	63	59	55	51	44
QF160-5-AB	9000003368	-	18.5	25	94	92	89	85	79	74	69	65	60	54	45
QF160-5	9000003365	-	22	30	106	105	101	96	90	84	78	73	69	63	55
QF160-6	9000003372	-	26	35	129	127	123	117	110	102	96	90	84	77	68
QF160-7	9000003377	-	30	40	148	146	142	135	126	118	110	103	96	88	77
QF160-8	9000003380	9000003382	37	50	170	167	163	155	145	136	127	119	112	102	90


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 160

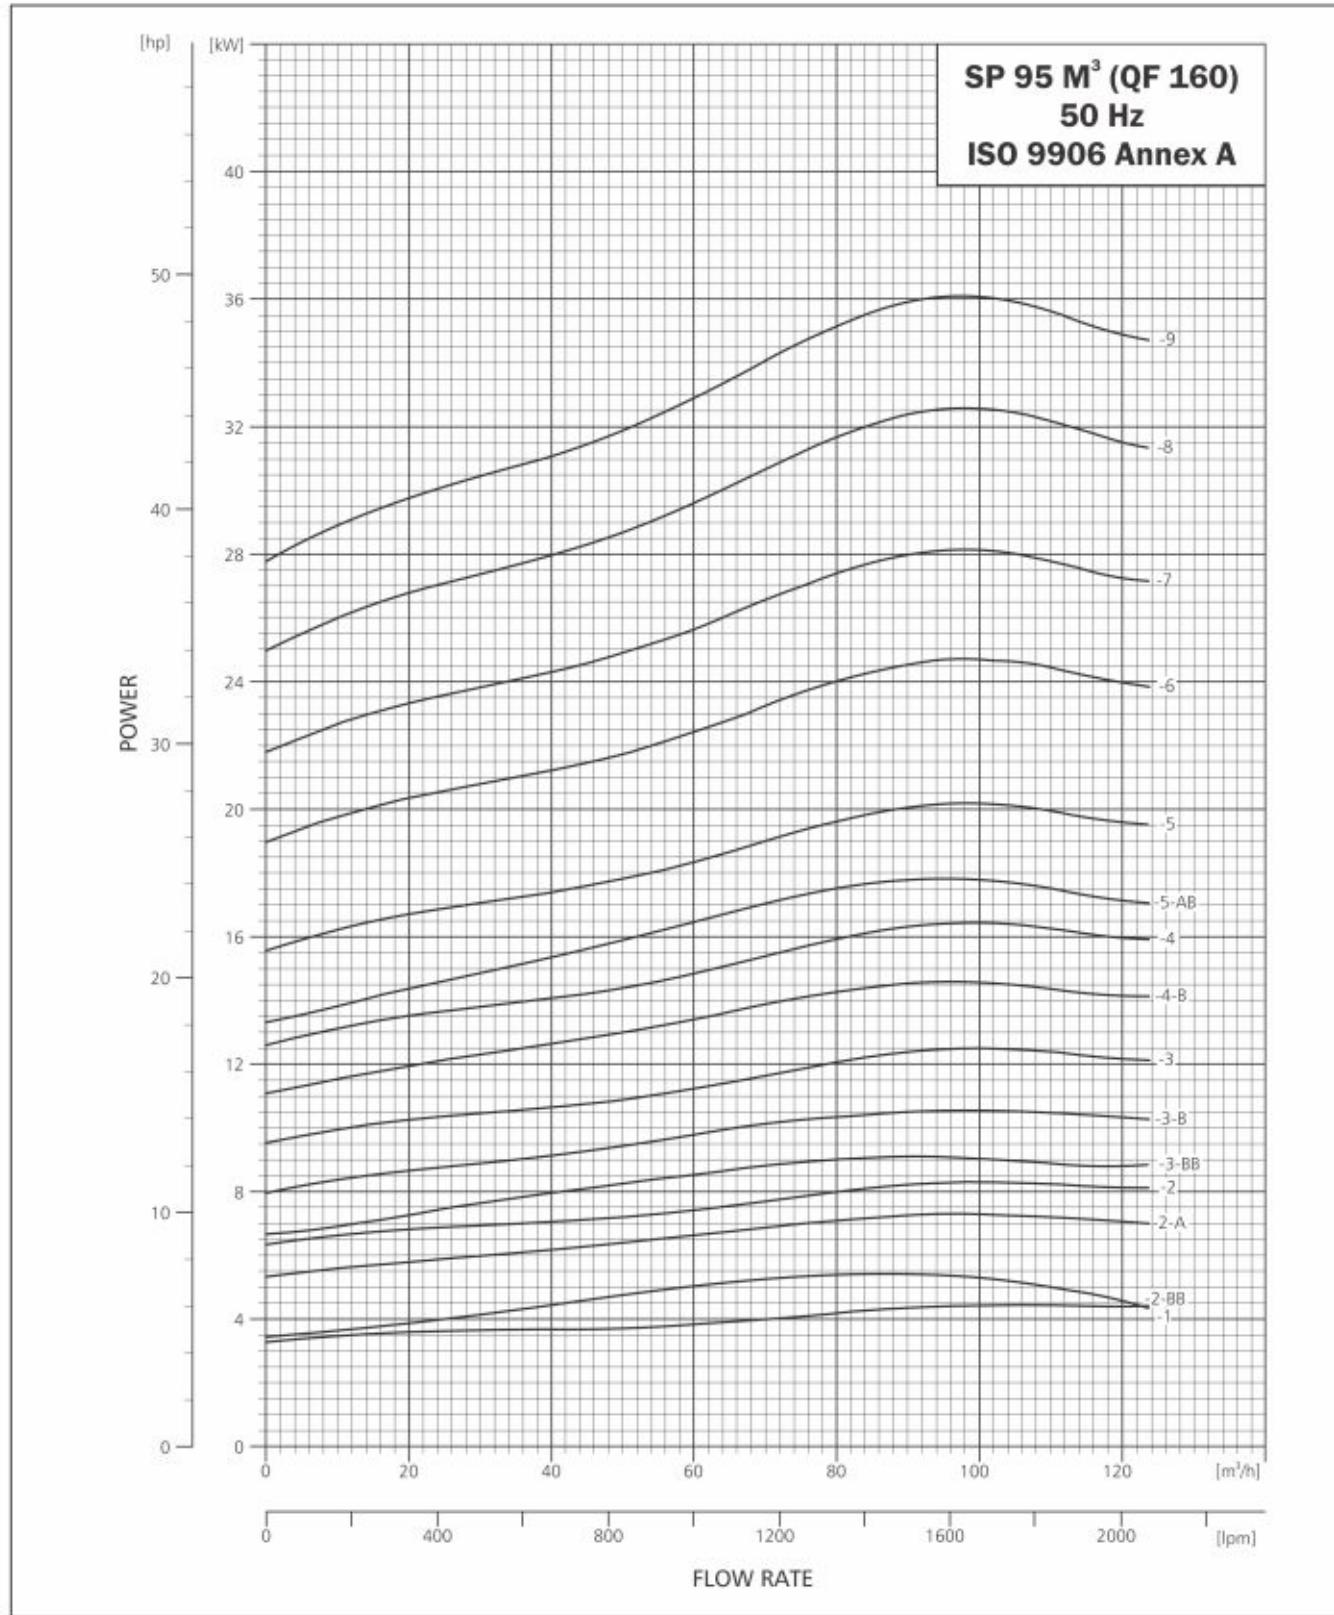


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 160

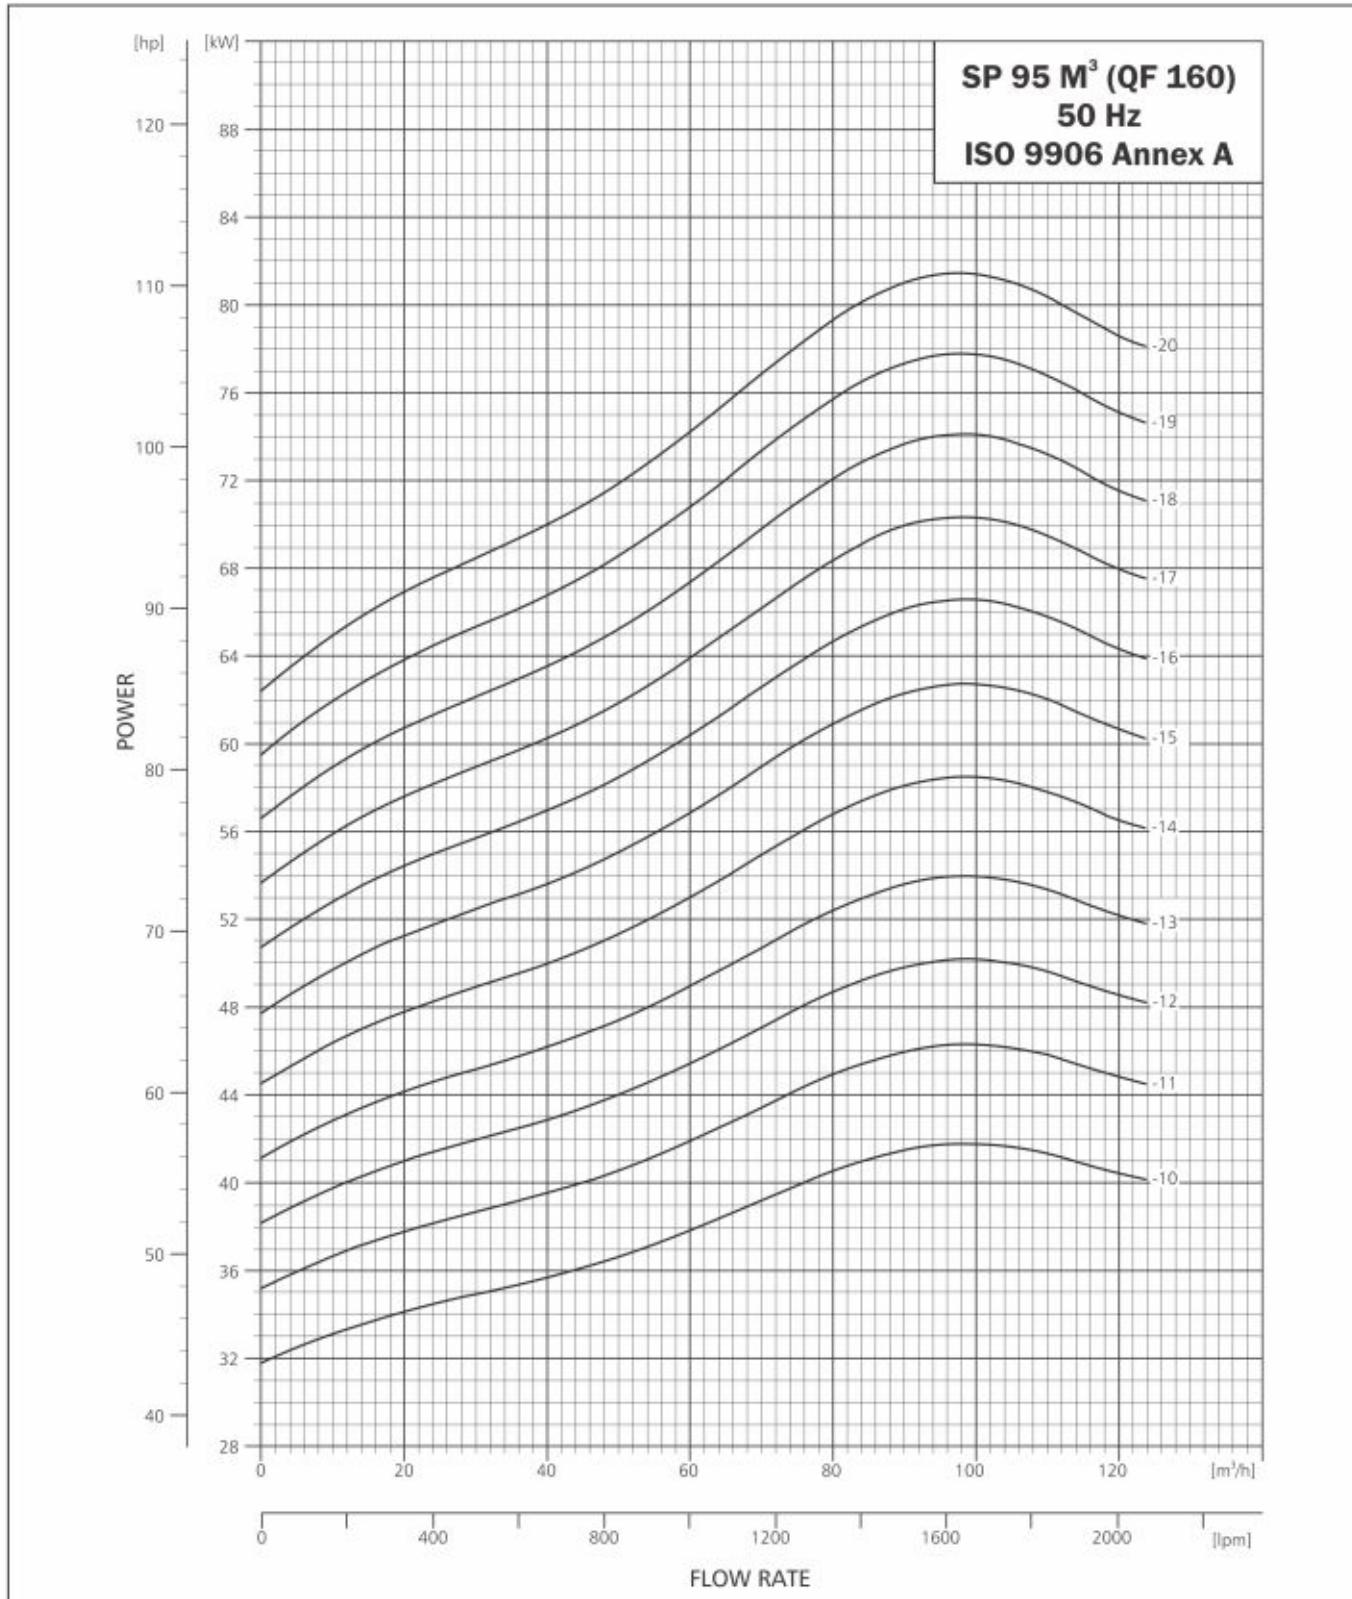


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 210

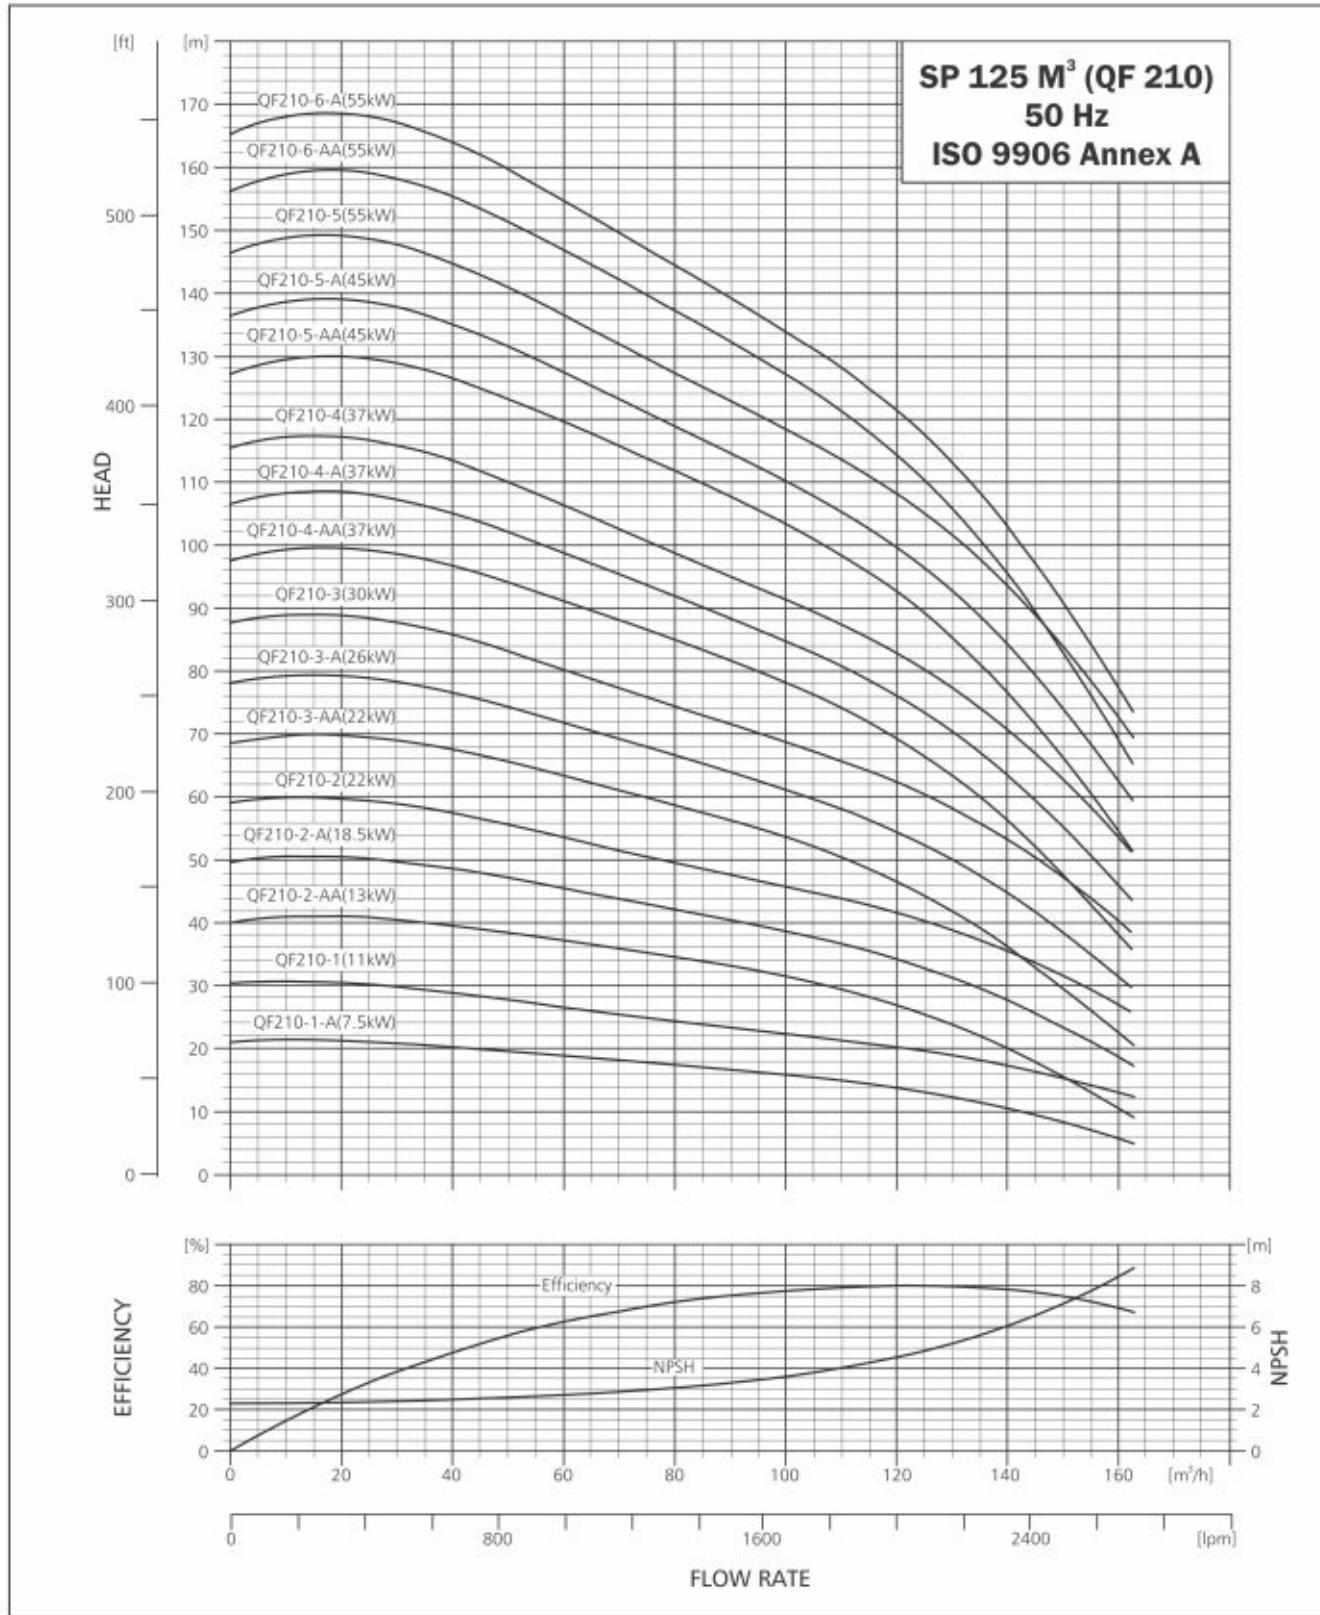

PERFORMANCE CURVE


SUBMERSIBLE PUMP QF 210

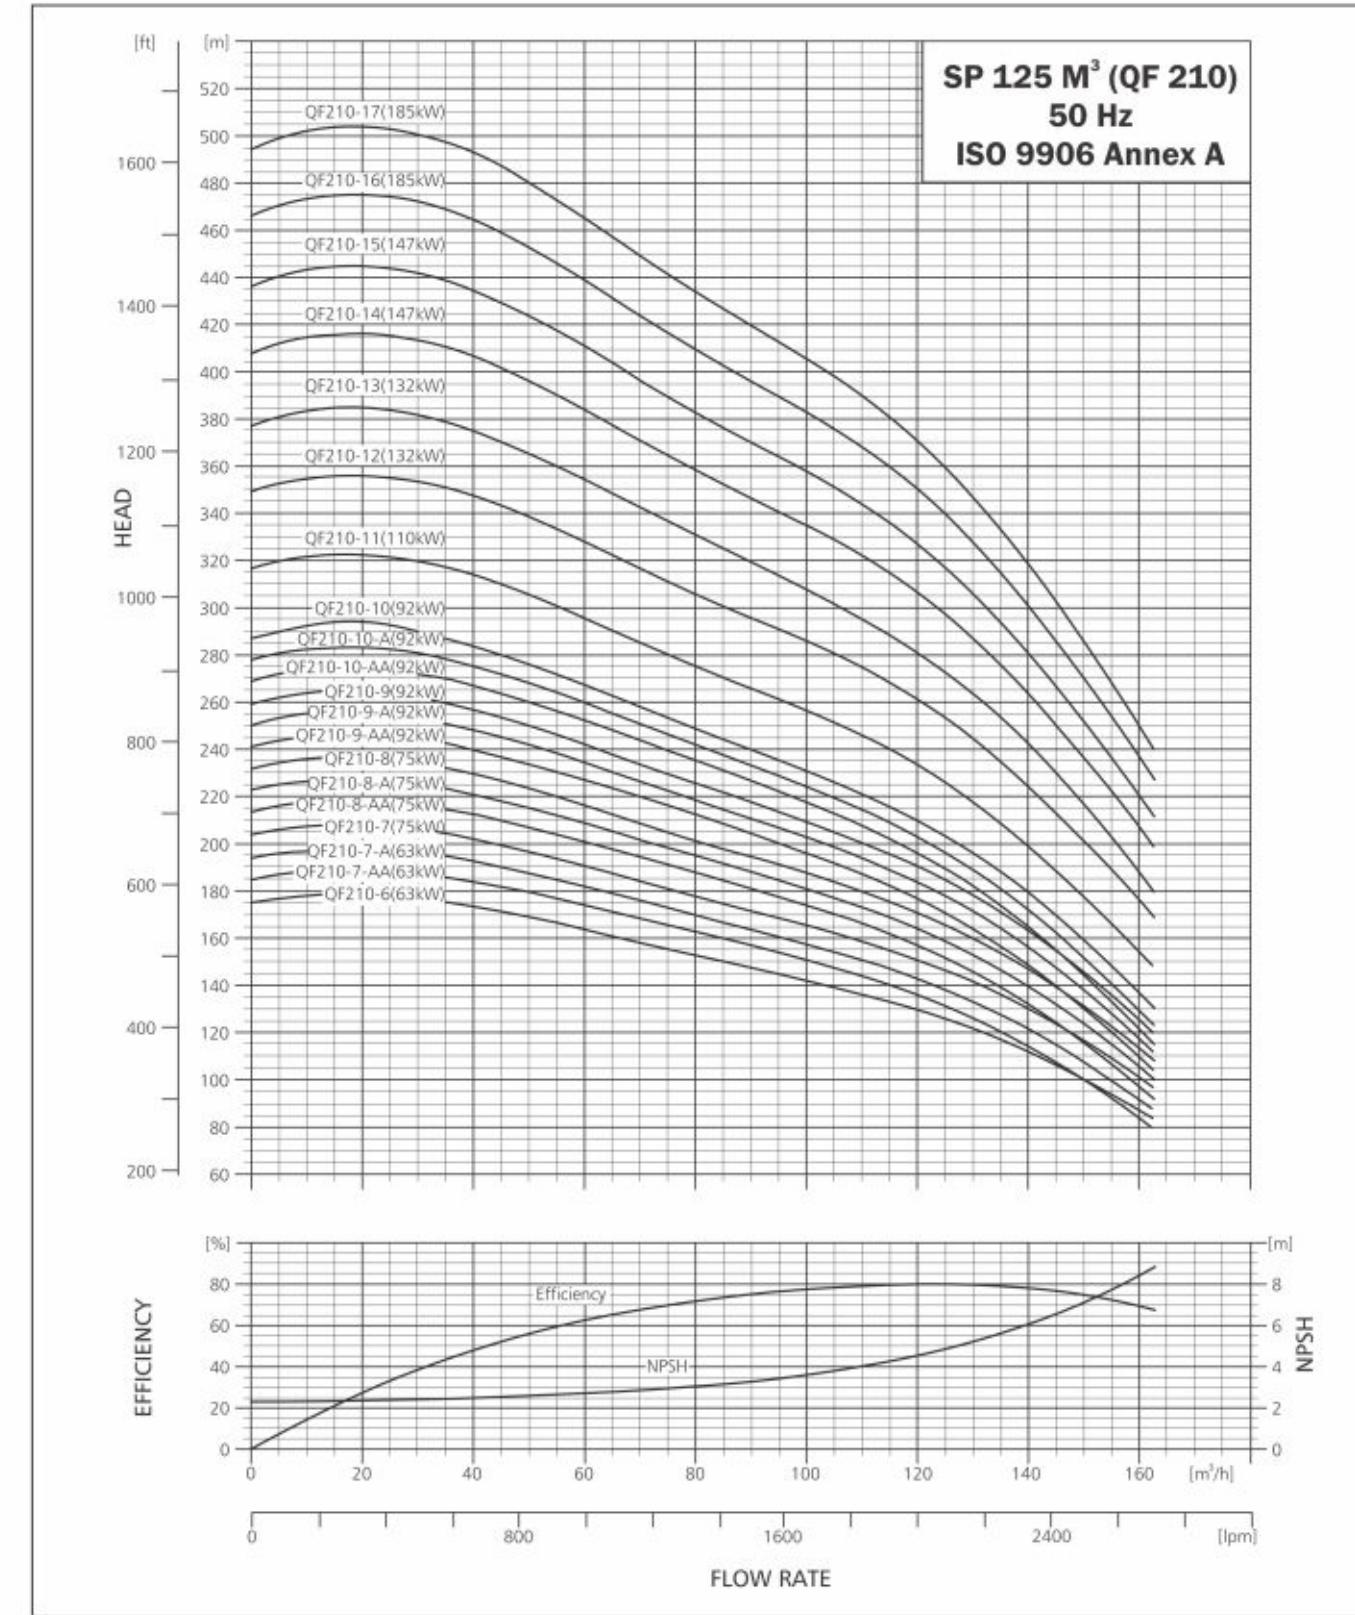

TECHNICAL DATA

SUBMERSIBLE PUMP QF 210

DIMENSIONS AND WEIGHTS

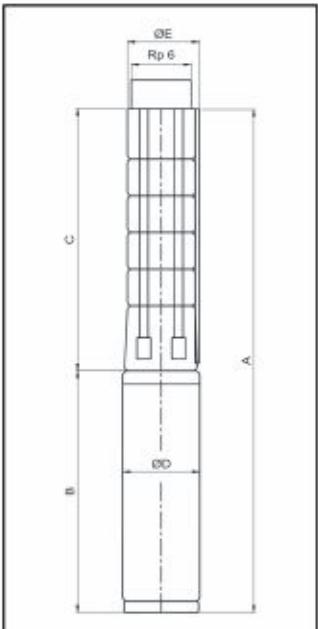

E = Maximum diameter of pump inclusive of cable guard & motor.

PUMP TYPE	MOTOR		DIMENSIONS (MM)								NET WEIGHT (KG)			
	TYPE	POWER (kW)	RP 5" CONNECTION				RP 5" FLANGE				B	D	PUMP	MOTOR
			A	C	E*	E**	A	C	E*	E**				
QF210-1A	MATASF 150	7.5	1360	641	211	218	1360	641	222	226	719	143	27	50
QF210-1	MATASF 150	11	1420	641	211	218	1420	641	222	226	779	143	27	53
QF210-2AA	MATASF 150	13	1626	797	211	218	1626	797	222	226	829	143	33	61
QF210-2A	MATASF 150	18.5	1716	797	211	218	1716	797	222	226	919	143	33	70
QF210-2	MATASF 150	22	1806	797	213	218	1806	797	222	226	1009	143	33	79
QF210-3AA	MATASF 150	22	1962	953	213	218	1962	953	222	226	1009	143	39	79
QF210-3A	MATASF 150	26	2067	953	213	218	2067	953	222	226	1114	143	39	90
QF210-3	MATASF 150	30	2167	953	213	218	2167	953	222	226	1214	143	39	100
QF210-3	MATASF 200	30	2093	953	213	218	2093	953	222	226	1140	194	39	140
QF210-4AA	MATASF 200	37	2249	1109	213	218	2249	1109	222	226	1140	194	45	140
QF210-4A	MATASF 200	37	2249	1109	213	218	2249	1109	222	226	1140	194	45	140
QF210-4	MATASF 200	37	2249	1109	213	218	2249	1109	222	226	1140	194	45	140
QF210-5AA	MATASF 200	45	2495	1265	213	218	2495	1265	222	226	1230	194	51	156
QF210-5A	MATASF 200	45	2495	1265	213	218	2495	1265	222	226	1230	194	51	156
QF210-5	MATASF 200	55	2605	1265	213	218	2605	1265	222	226	1340	194	51	179
QF210-6AA	MATASF 200	55	2761	1421	213	218	2761	1421	222	226	1340	194	57	179
QF210-6A	MATASF 200	55	2761	1421	213	218	2761	1421	222	226	1340	194	57	179
QF210-6	MATASF 200	63	2891	1421	218	227	2891	1421	229	232	1470	194	57	198
QF210-7AA	MATASF 200	63	3047	1577	218	227	3047	1577	229	232	1470	194	63	198
QF210-7	MATASF 200	63	3047	1577	218	227	3047	1577	229	232	1470	194	63	215
QF210-8AA	MATASF 200	75	3293	1733	218	227	-	-	-	-	1560	194	70	215
QF210-8A	MATASF 200	75	3293	1733	218	227	-	-	-	-	1560	194	70	215
QF210-8	MATASF 200	75	3293	1733	218	227	-	-	-	-	1560	194	70	215
QF210-9AA	MATASF 200	93	3629	1889	218	227	-	-	-	-	1740	194	76	247
QF210-9A	MATASF 200	93	3629	1889	218	227	-	-	-	-	1740	194	76	247
QF210-9	MATASF 200	93	3629	1889	218	227	-	-	-	-	1740	194	76	247
QF210-10AA	MATASF 200	93	3785	2045	218	227	-	-	-	-	1740	194	82	247
QF210-10A	MATASF 200	93	3785	2045	218	227	-	-	-	-	1740	194	82	247
QF210-10	MATASF 200	93	3785	2045	218	227	-	-	-	-	1740	194	82	247
QF210-11	MATASF 10*	110	4961	2201	237	237	-	-	-	-	2760	237	91	310
QF210-12	MATASF 10*	130	5378	2357	237	237	-	-	-	-	3021	237	97	320
QF210-13	MATASF 10*	130	5534	2513	237	237	-	-	-	-	3021	235	104	320
QF210-14	MATASF 10*	150	5910	2669	237	237	-	-	-	-	3241	237	110	320
QF210-15	MATASF 10*	150	6066	2825	237	237	-	-	-	-	3241	237	116	320
QF210-16	MATASF 10*	185	6522	2981	237	237	-	-	-	-	3541	237	122	430
QF210-17	MATASF 10*	185	6678	3137	237	237	-	-	-	-	3541	237	128	430

Maximum diameter of pump with one motor cable.

Maximum diameter of pump with two motor cable.

Motor type may change as per requirement.

TECHNICAL DATA


SUBMERSIBLE PUMP QF 210

PERFORMANCE TABLE QF 210

MODEL	QF-210			DISCHARGE (Q)														
				m³/h						1/min.								
	6x10	8x10	10x10	[kW]	[HP]													
QF210-1A	9000003398	-	-	7.5	10	21	19	18	17	17	16	15	14	12	10	8	6	5
QF210-1	9000003386	-	-	11	15	30	27	25	24	23	22	21	20	19	17	15	13	13
QF210-2AA	9000003406	-	-	13	17.5	40	37	36	35	33	31	29	27	24	20	16	11	10
QF210-2A	9000003404	-	-	18.5	25	50	45	44	42	40	39	37	34	31	28	23	19	18
QF210-2	9000003402	-	-	22	30	59	54	52	50	48	46	44	42	39	35	32	27	26
QF210-3AA	9000003415	-	-	22	30	69	63	61	59	56	54	50	47	42	36	30	2	


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 210

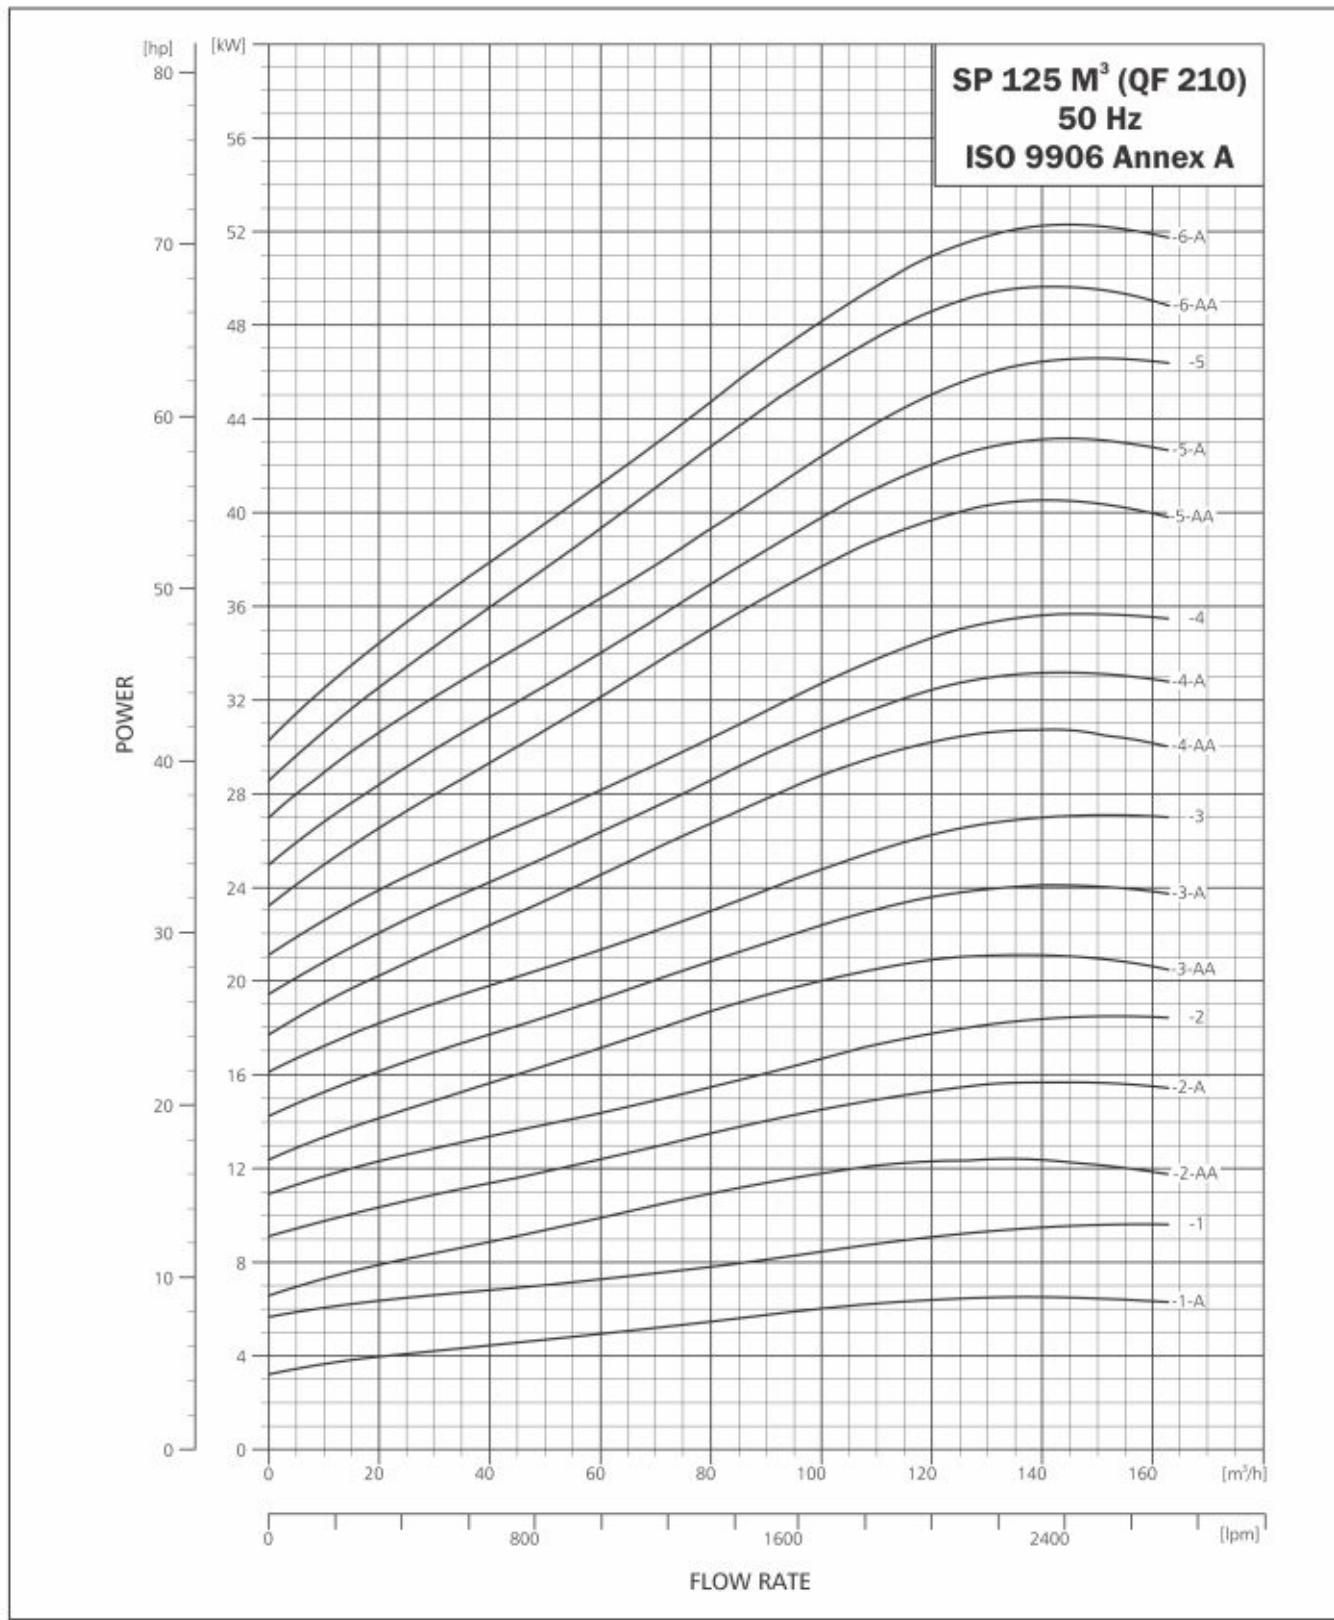


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 210

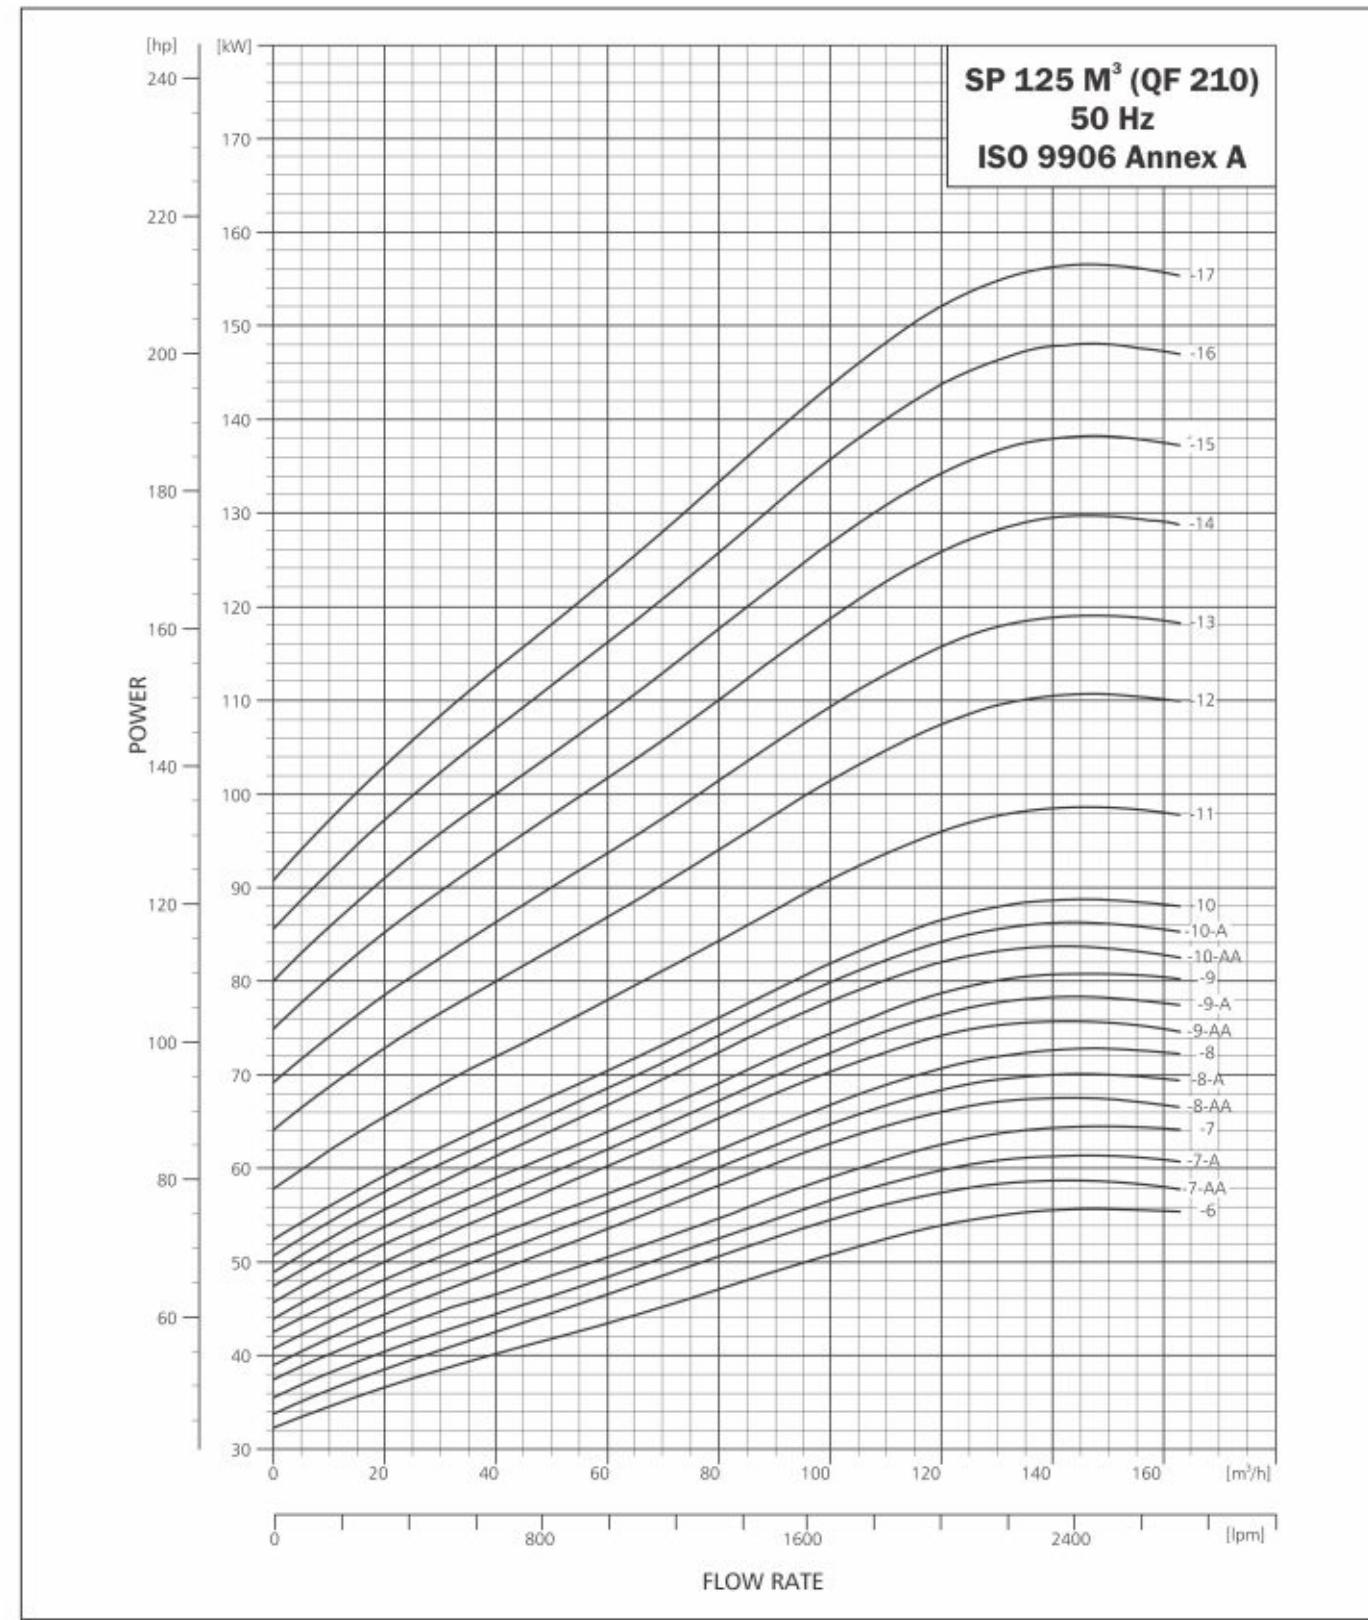


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 270

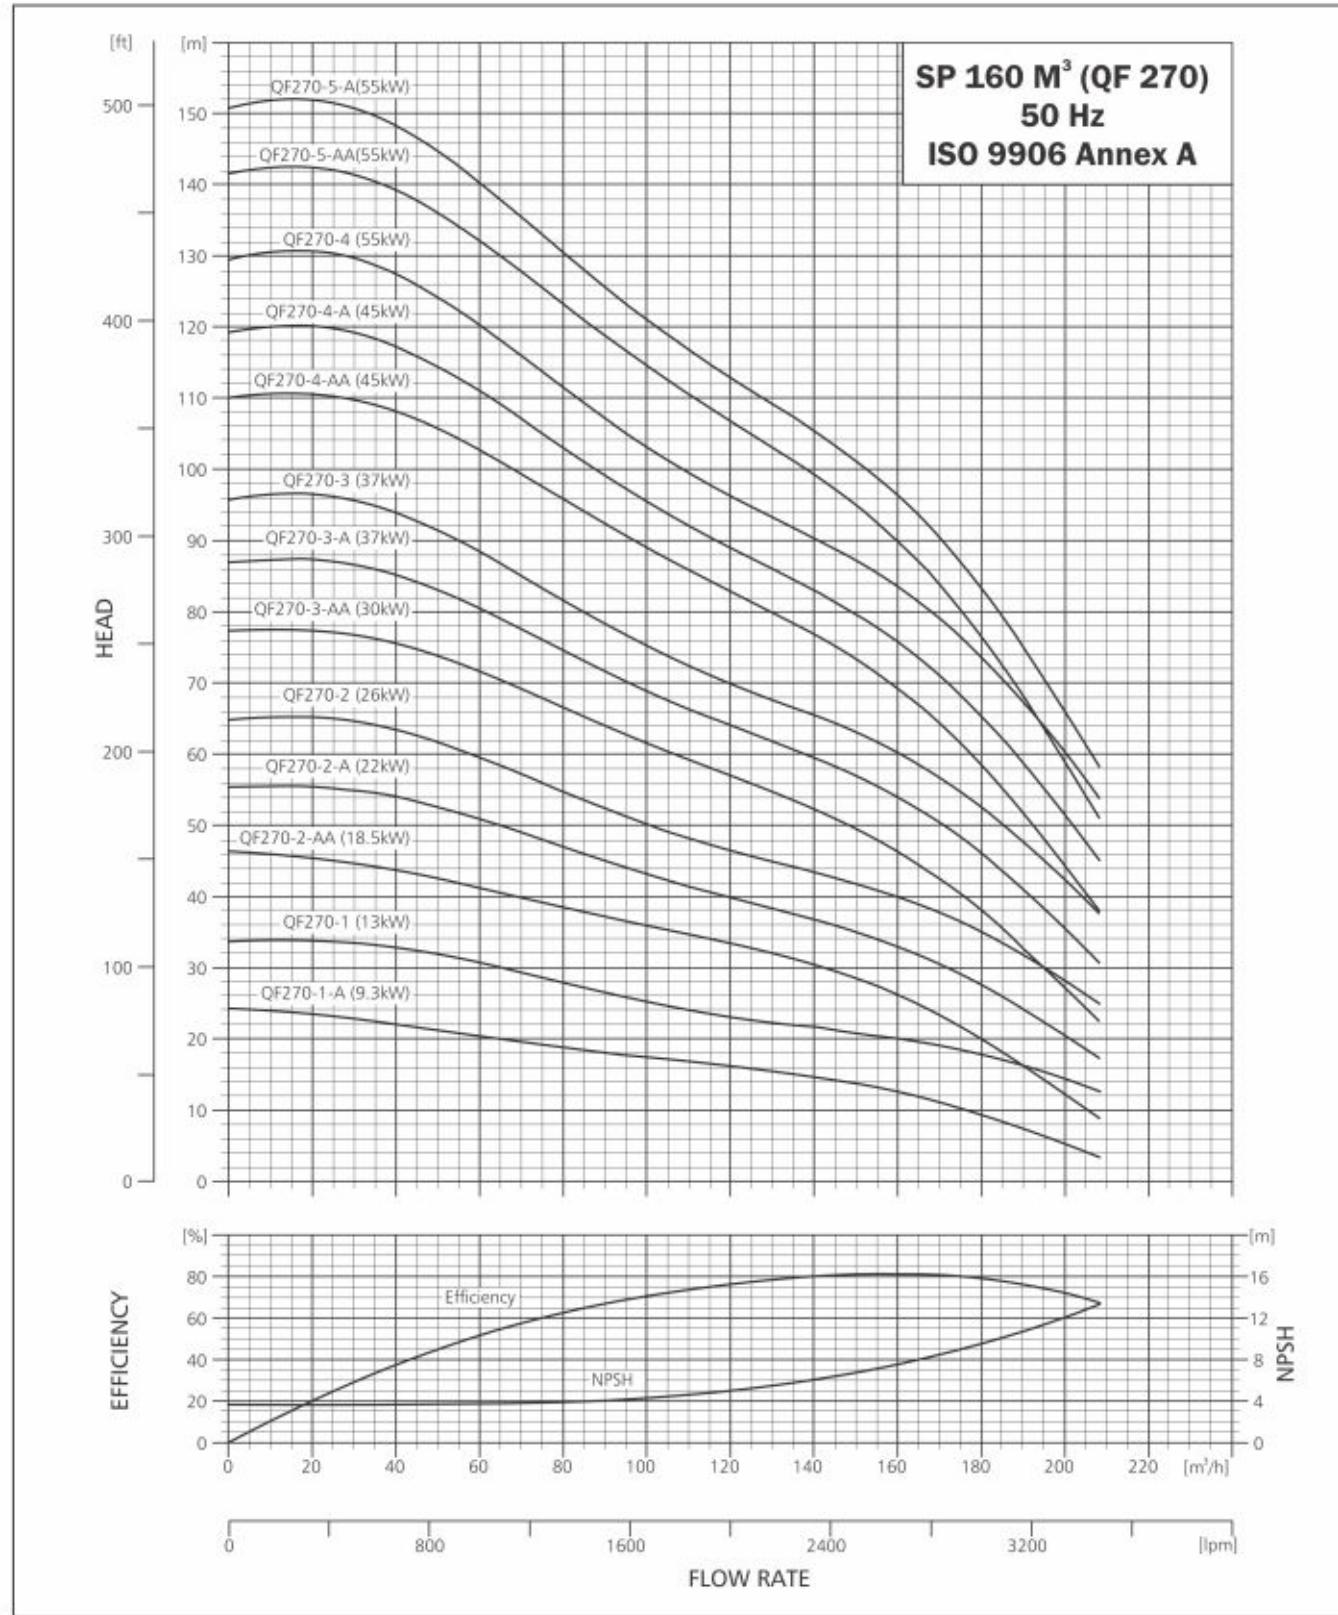

PERFORMANCE CURVE


SUBMERSIBLE PUMP QF 270

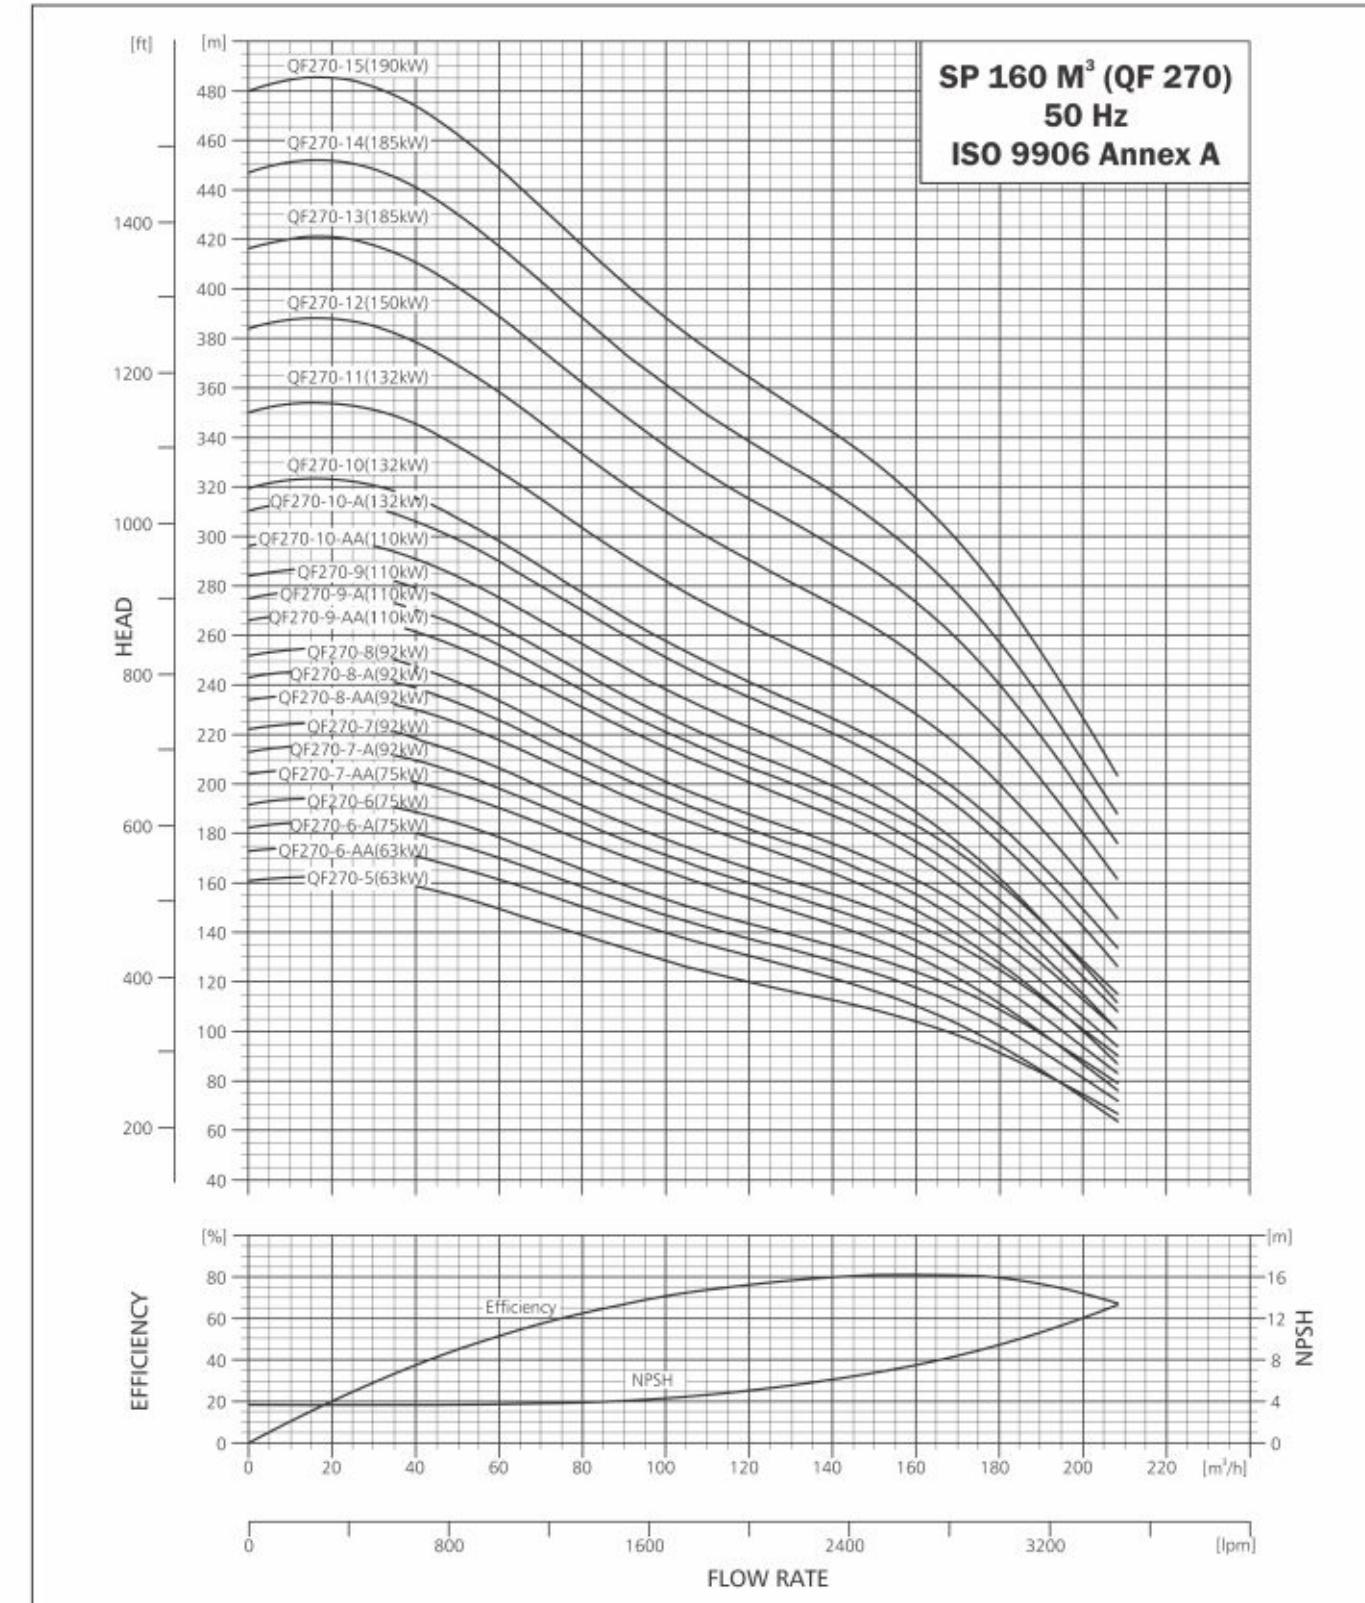

TECHNICAL DATA

SUBMERSIBLE PUMP QF 270

DIMENSIONS AND WEIGHTS

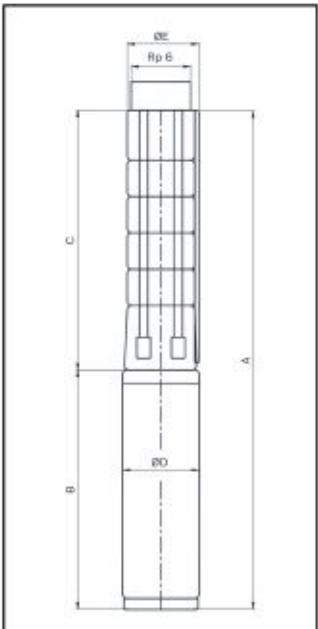

E = Maximum diameter of pump inclusive of cable guard & motor.

PUMP TYPE	MOTOR		DIMENSIONS (MM)								NET WEIGHT (KG)			
	TYPE	POWER (kW)	RP 6" CONNECTION				6" FLANGE				PUMP	MOTOR		
			A	C	E*	E**	A	C	E*	E**				
QF270-1A	MATASF 150	9.3	1390	641	211	218	1390	641	222	226	749	143	26	50
QF270-1	MATASF 150	13	1470	641	211	218	1470	641	222	226	829	143	26	61
QF270-2AA	MATASF 150	18.5	1716	797	211	218	1716	797	222	226	919	143	33	70
QF270-2A	MATASF 150	22	1806	797	211	218	1806	797	222	226	1009	143	33	79
QF270-2	MATASF 150	26	1911	797	213	218	1911	797	222	226	1114	143	33	90
QF270-3AA	MATASF 150	30	2167	953	213	218	2167	953	222	226	1214	143	39	100
QF270-3AA	MATASF 200	30	2093	953	213	218	2093	953	222	226	1140	195	39	140
QF270-3A	MATASF 200	37	2093	953	213	218	2093	953	222	226	1140	195	39	140
QF270-3	MATASF 200	37	2093	953	213	218	2093	953	222	226	1140	195	39	140
QF270-4AA	MATASF 200	45	2339	1109	213	218	2339	1109	222	226	1230	195	45	156
QF270-4A	MATASF 200	45	2339	1109	213	218	2339	1109	222	226	1230	195	45	156
QF270-4	MATASF 200	55	2449	1109	213	218	2449	1109	222	226	1340	195	45	179
QF270-5AA	MATASF 200	55	2605	1265	213	218	2605	1265	222	226	1340	195	51	179
QF270-5A	MATASF 200	55	2605	1265	213	218	2605	1265	222	226	1340	195	51	179
QF270-5	MATASF 200	63	2735	1265	213	218	2735	1265	222	226	1470	195	51	198
QF270-6AA	MATASF 200	63	2891	1421	213	218	2891	1421	222	226	1470	195	58	198
QF270-6A	MATASF 200	75	2981	1421	213	218	2981	1421	222	226	1560	195	58	215
QF270-6	MATASF 200	75	2981	1421	218	227	2981	1421	229	232	1560	195	58	215
QF270-7AA	MATASF 200	75	3137	1577	218	227	-	-	-	-	1560	195	64	215
QF270-7A	MATASF 200	93	3317	1577	218	227	-	-	-	-	1740	195	64	247
QF270-7	MATASF 200	93	3317	1577	218	227	-	-	-	-	1740	195	64	247
QF270-8AA	MATASF 200	93	3473	1733	218	227	-	-	-	-	1740	195	70	247
QF270-8A	MATASF 200	93	3473	1733	218	227	-	-	-	-	1740	195	70	247
QF270-8	MATASF 200	93	3473	1733	218	227	-	-	-	-	1740	195	70	247
QF270-9AA	MATASF 10"	110	4650	1889	218	227	-	-	-	-	2761	195	80	310
QF270-9A	MATASF 10"	110	4650	1889	218	227	-	-	-	-	2761	195	80	310
QF270-9	MATASF 10"	110	4650	1889	218	227	-	-	-	-	2761	195	80	310
QF270-10AA	MATASF 10"	110	4806	2045	218	227	-	-	-	-	2761	195	86	310
QF270-10A	MATASF 10"	132	5066	2045	218	227	-	-	-	-	3021	235	86	320
QF270-10	MATASF 10"	132	5066	2045	218	227	-	-	-	-	3021	235	86	320
QF270-11	MATASF 10"	132	5222	2201	237	237	-	-	-	-	3021	235	93	320
QF270-12	MATASF 10"	150	5598	2357	237	237	-	-	-	-	3241	237	99	320
QF270-13	MATASF 10"	185	6054	2513	237	237	-	-	-	-	3541	237	105	430
QF270-14	MATASF 10"	185	6210	2669	237	237	-	-	-	-	3541	237	111	430

* Maximum diameter of pump with one motor cable.

** Maximum diameter of pump with two motor cable.

Motor type may change as per requirement.

TECHNICAL DATA


SUBMERSIBLE PUMP QF 270

PERFORMANCE TABLE QF 270

MODEL	CON- NEC- TION	QF-270			DISCHARGE (Q)															
		MATERIAL CODE		MOTOR RATING	m³/h		0	80	90	100	110	120	130	140	150	160	170	180	200	
		6x10	8x10		[kW]	[HP]	-	-	-	-	-	-	-	-	-	-	-	-	208	
QF270-1A	9000003467	-	-	9.3	12.5	24	19	18	17	17	16	15	15	14	13	11	9	7	5	3
QF270-1	9000003453	-	-	13	17.5	34	28	26	25	24	23	22	22	21	20	19	18	16	14	13
QF270-2AA	9000003476	-	-	18.5	25	46	38	37	36	35	33	32	30	29	26	23	20	16	12	9
QF270-2A	9000003474	-	-	22	30	55	47	45	43	41	40	38	37	35	33	31	28	24	20	17
QF270-2	9000003471	-	-	26	35	65	55	52	50	48	47	45	43	42	40	38	35	32	28	25
QF270-3AA	9000003484	9000003485	-	30	40	77	67	64	62	59	57									


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 270

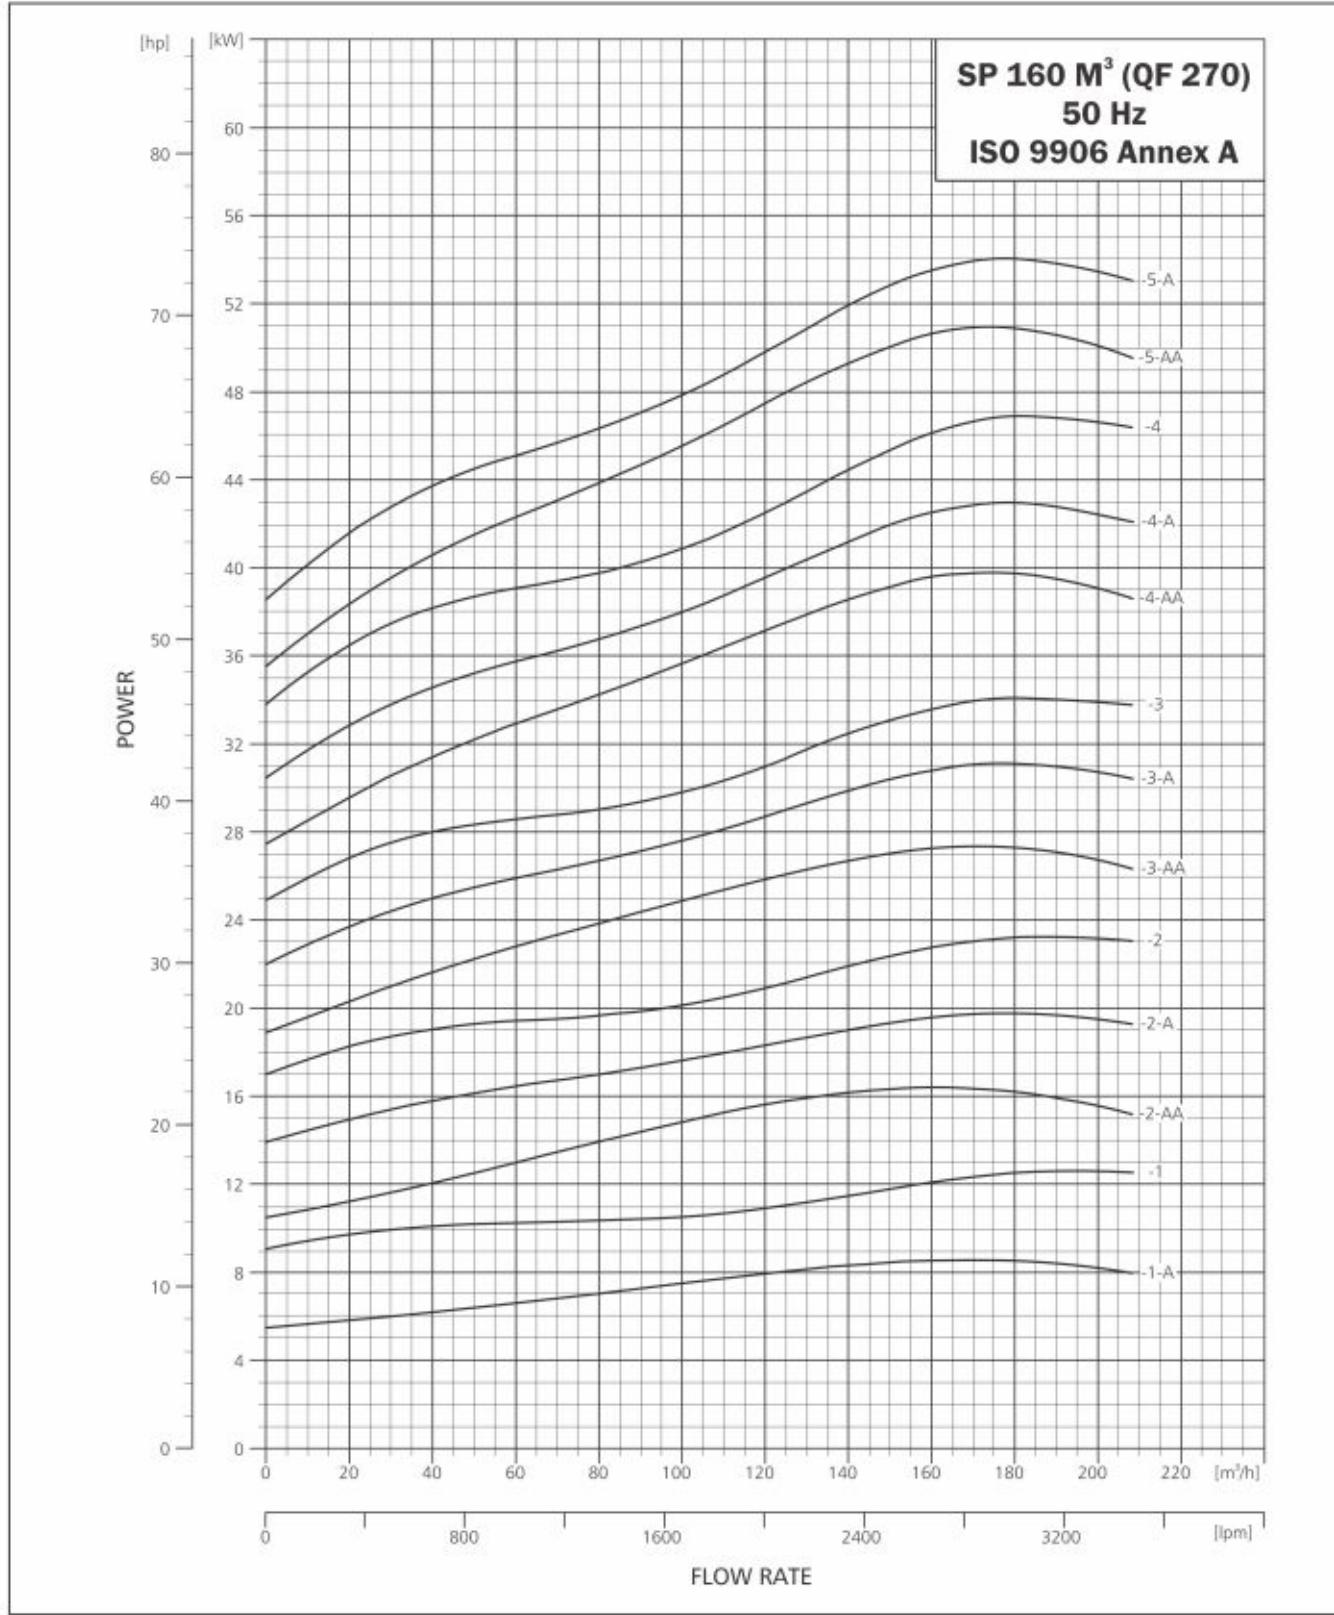


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 270

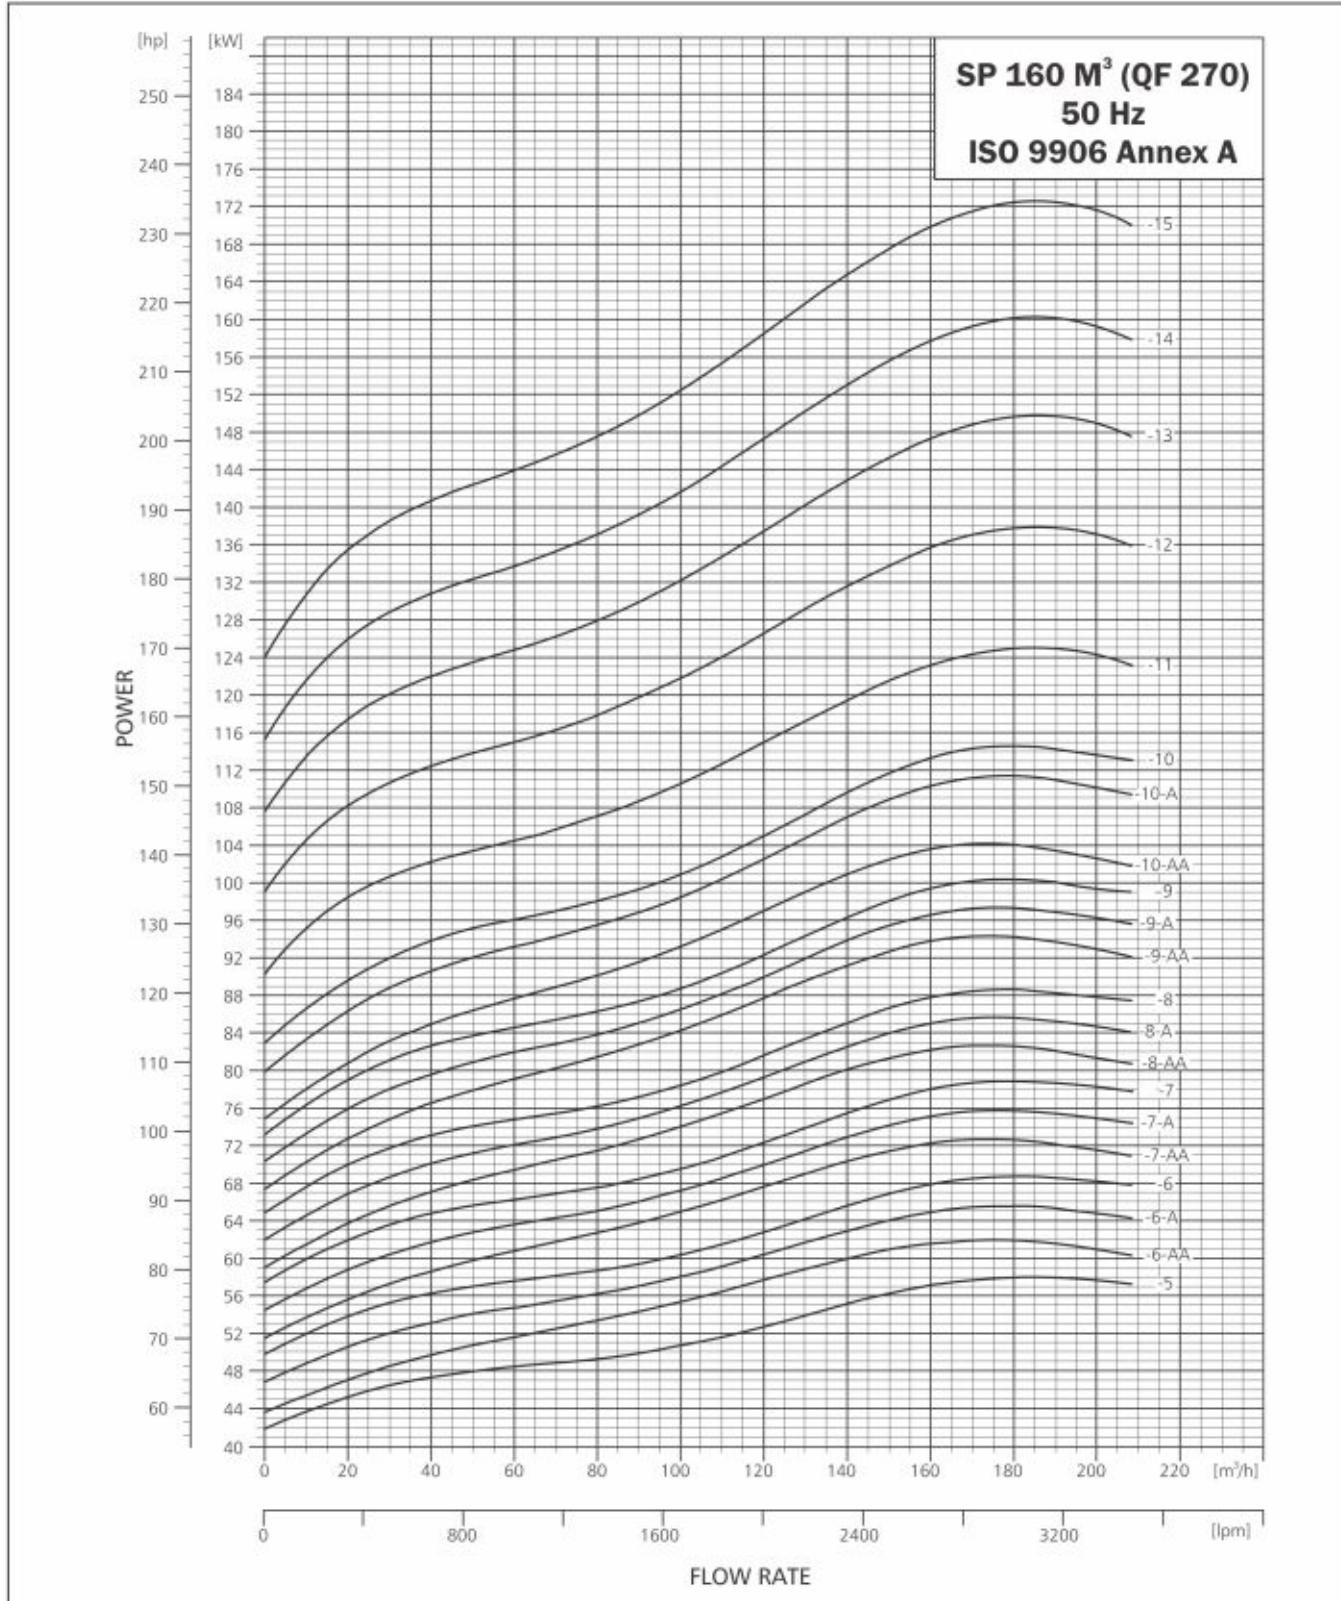


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 360

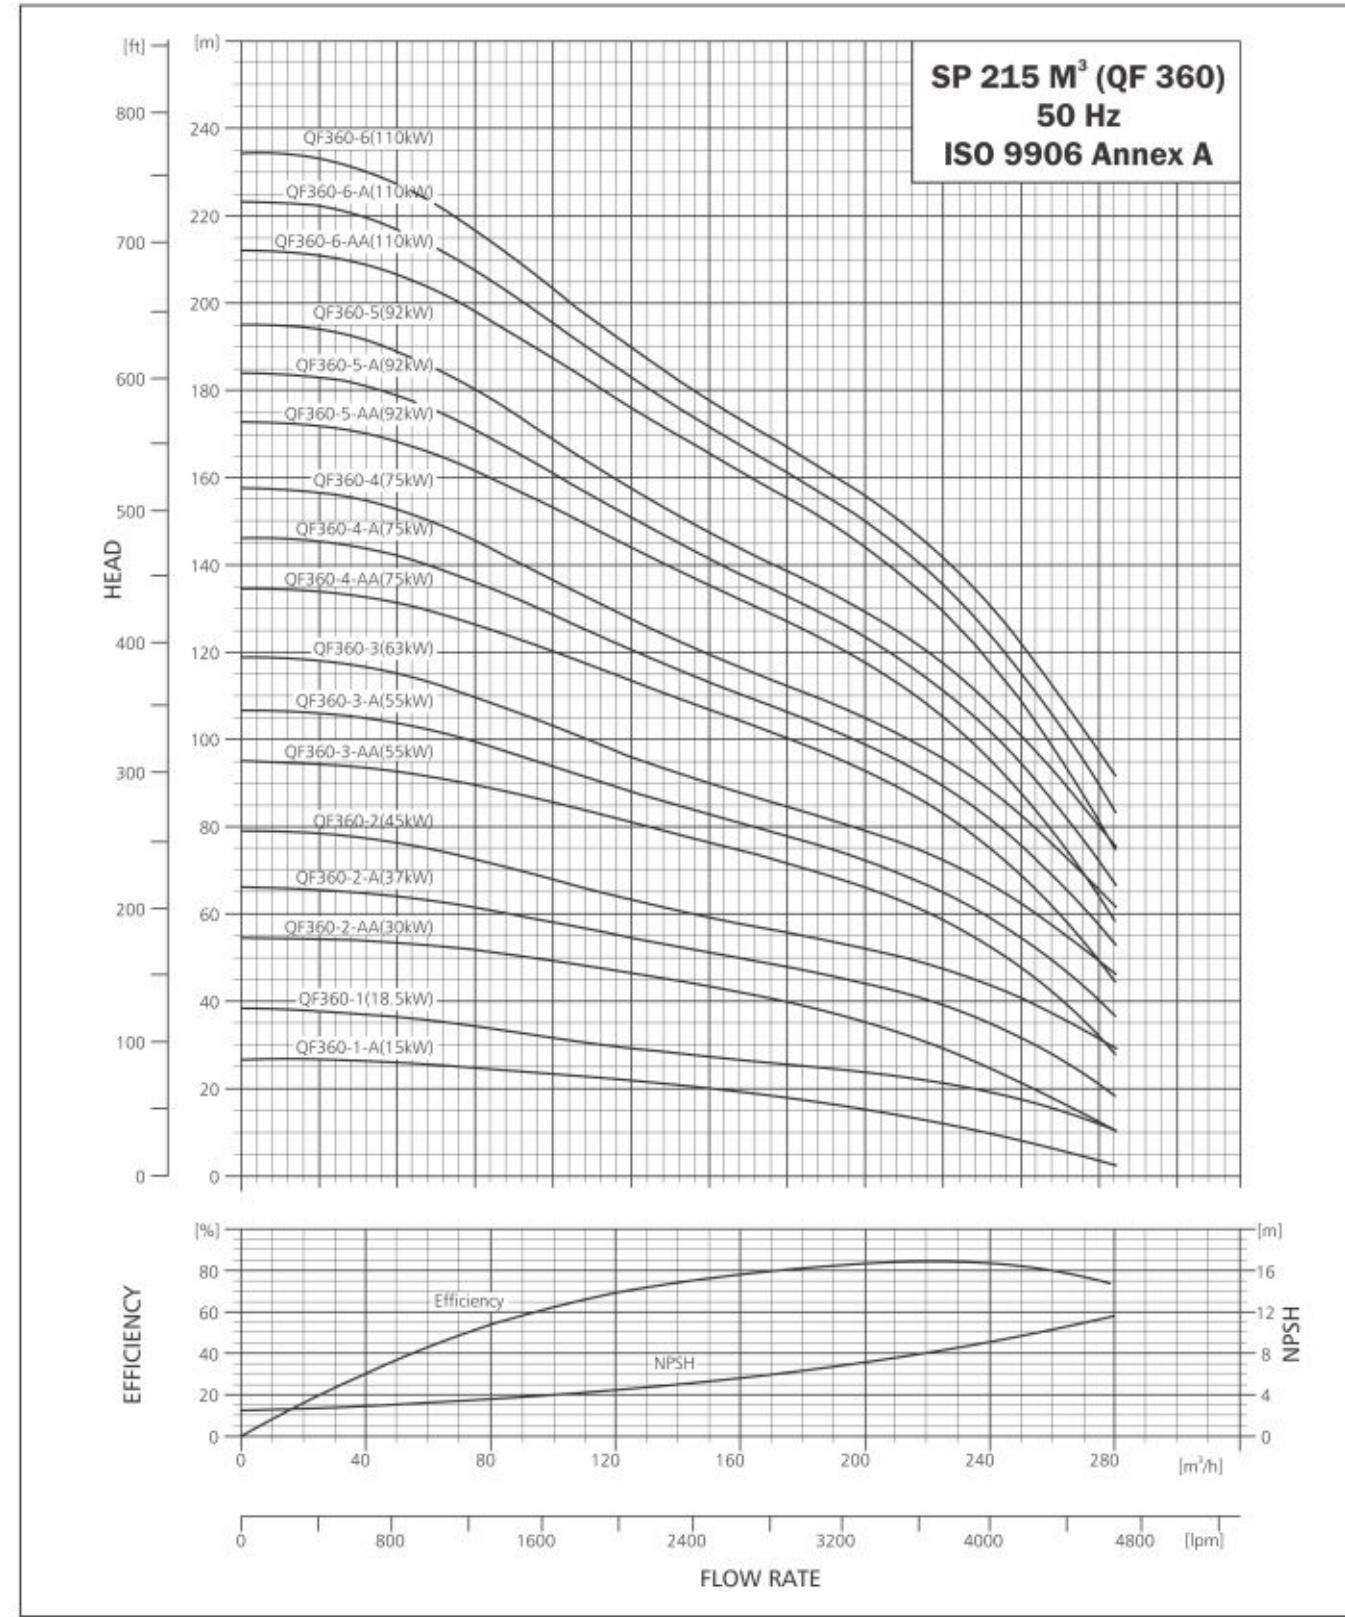


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 360

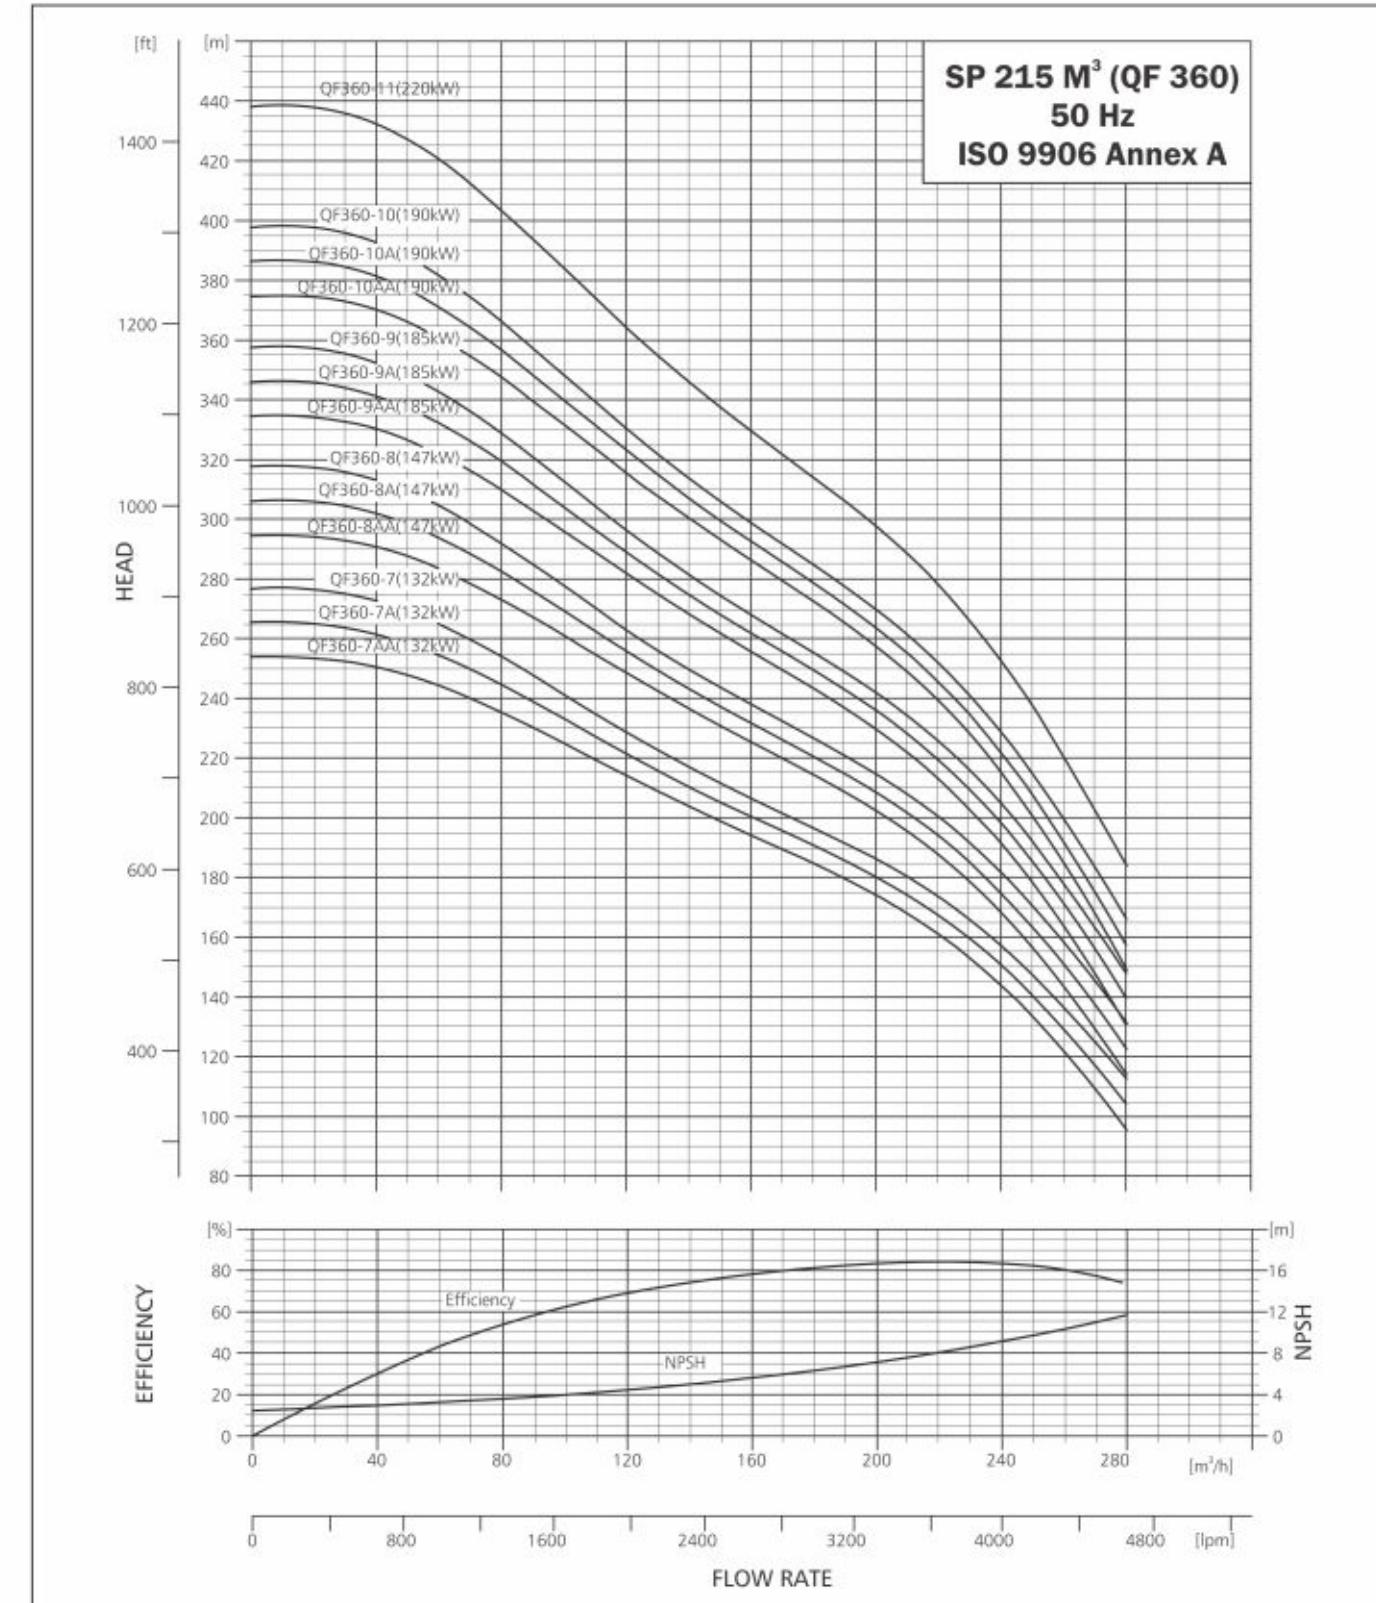

TECHNICAL DATA

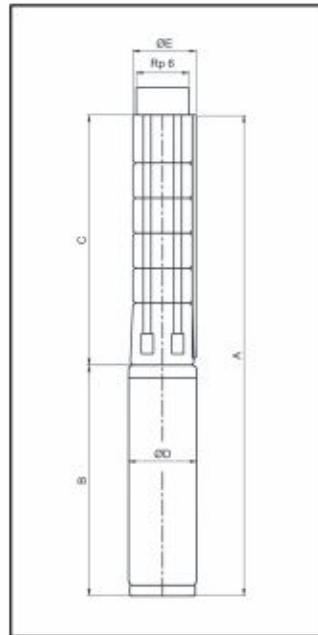

SUBMERSIBLE PUMP QF 360

DIMENSIONS AND WEIGHTS

Technical Data QF 360																
Pump Type	Motor		Dimensions (mm)										Net Weight (kg)			
	Type	Power (kW)	RP 6" Connection				6" Flange				B	D	Pump	Motor		
			A	C	E*	E**	A	C	E*	E**						
QF360-1-A	MATASF 150	15	1482	608	241	247	1482	608	241	247	874	143	28	66		
QF360-1	MATASF 150	18.5	1527	608	241	247	1527	608	241	247	919	143	28	70		
QF360-2-AA	MATASF 150	30	1998	784	241	247	1998	784	241	247	1214	143	56	100		
QF360-2-AA	MATASF 200	30	1924	784	241	247	1924	784	241	247	1140	195	56	140		
QF360-2-A	MATASF 200	37	1924	784	241	247	1924	784	241	247	1140	195	56	140		
QF360-2	MATASF 200	45	2014	784	241	247	2014	784	241	247	1230	195	56	156		
QF360-3-AA	MATASF 200	55	2300	960	241	247	2300	960	241	247	1340	195	84	179		
QF360-3-A	MATASF 200	55	2300	960	241	247	2300	960	241	247	1340	195	84	179		
QF360-3	MATASF 200	63	2430	960	241	247	2430	960	241	247	1470	195	84	198		
QF360-4-AA	MATASF 200	75	2696	1136	241	247	2696	1136	241	247	1560	195	111	215		
QF360-4-A	MATASF 200	75	2696	1136	241	247	2696	1136	241	247	1560	195	111	215		
QF360-4	MATASF 200	75	2696	1136	241	247	2696	1136	241	247	1560	195	111	215		
QF360-5-AA	MATASF 200	92	3052	1312	241	247	3052	1312	241	247	1740	195	139	247		
QF360-5-A	MATASF 200	92	3052	1312	241	247	3052	1312	241	247	1740	195	139	247		
QF360-5	MATASF 200	92	3052	1312	241	247	3052	1312	241	247	1740	195	139	247		
QF360-6-AA	MATASF 10"	110	4249	1488	241	247	4249	1488	241	247	2761	237	167	315		
QF360-6-A	MATASF 10"	110	4249	1488	241	247	4249	1488	241	247	2761	237	167	315		
QF360-6	MATASF 10"	110	4249	1488	241	247	4249	1488	241	247	2761	237	167	315		
QF360-7-AA	MATASF 10"	132	4685	1664	241	247	-	-	-	-	3021	237	195	362		
QF360-7-A	MATASF 10"	132	4685	1664	241	247	-	-	-	-	3021	237	195	362		
QF360-7	MATASF 10"	132	4685	1664	241	247	-	-	-	-	3021	237	195	362		
QF360-8-AA	MATASF 10"	147	5081	1840	241	247	-	-	-	-	3241	237	223	413		
QF360-8-A	MATASF 10"	147	5081	1840	241	247	-	-	-	-	3241	237	223	413		
QF360-8	MATASF 10"	147	5081	1840	276	276	-	-	-	-	3241	237	223	413		
QF360-9-AA	MATASF 10"	185	5557	2016	276	276	-	-	-	-	3541	237	251	449		
QF360-9-A	MATASF 10"	185	5557	2016	276	276	-	-	-	-	3541	237	251	449		
QF360-9	MATASF 10"	185	5557	2016	276	276	-	-	-	-	3541	237	251	449		
QF360-10-AA	MOTOR 12"	190	4172	2192	276	276	-	-	-	-	1980	286	278	632		
QF360-10-A	MOTOR 12"	190	4172	2192	286	286	-	-	-	-	1980	286	278	632		
QF360-10	MOTOR 12"	190	4172	2192	286	286	-	-	-	-	1980	286	278	632		
QF360-11	MOTOR 12"	220	4508	2368	286	286	-	-	-	-	2140	286	306	653		

* Maximum diameter of pump with one motor cable

** Maximum diameter of pump with two motor cable

Motor type may change as per requirement

TECHNICAL DATA




SUBMERSIBLE PUMP QF 360

QF-360		Performance Table QF 360																									
				m³/h		0	90	110	130	150	170	180	190	200	210	220	230	240	250	260	270	280					
				l/min.		0	1500	1833	2167	2500	2833	3000	3167	3333	3500	3667	3833	4000	4167	4333	4500	4667					
Model	Material Code				Motor Rating		Discharge (Q)										Total Head in (m)										
	6x12	8x12	10x12	12x12	[kW]	[HP]																					
QF 360-1A	9000003524	-	-	-	15	20	27	24	23	22	20	18	17	16	15	14	13	11	10	8	6	4	3				
QF 360-1	9000003513	-	-	-	18.5	25	38	33	31	29	27	26	25	24	24	23	22	21	19	18	16	13	11				
QF 360-2AA	9000010313	9000003534	-	-	30	40	55	50	48	46	43	41	39	37	35	33	31	28	25	21	18	14	11				
QF 360-2A	9000003529	9000003530	-	-	37	50	66	59	57	54	51	49	47	46	44	42	40	38	35	32	28	23	18				
QF 360-2	-	9000003526	-	-	45	60	79	70	66	62	59	56	55	54	52	50	49	46	44	41	37	34	30				
QF 360-3AA	-	9000003543	-	-	55	75	95	87	84	80	76	73	71	69	66	63	60	57	53	48	42	36	28				
QF 360-3A	-	9000003540	-	-	55	75	107	96	92	87	83	79	77	75	72	70	67	63	59	55	49	43	37				
QF 360-3	-	9000003537	-	-	63	85	119	106	100	95	90	86	84	81	79	77	74	71	67	62	58	52	46				
QF 360-4AA	-	9000003552	-	-	75	100	135	123	117	112	107	102	99	96	93	89	85	80	75	69	62	54	45				
QF 360-4A	-	9000003549	-	-	75	100	146	132	125	119	113	108	105	102	99	95	91	87	82	76	69	61	53				
QF 360-4	-	9000003546	-	-	75	100	158	140	133	126	119	114	111	108	105	102	98	93	88	82	76	69	62				
QF 360-5AA	-	9000003562	-	-	92	125	173	157	149	142	135	129	125	122	118	113	108	102	95	88	79	69	59				
QF 360-5A	-	9000003559	-	-	92	125	184	165	157	149	141	135	131	127	123	119	114	108	102	94	86	77	67				
QF 360-5	-	9000003555	-	-	92	125	195	173	164	155	148	140	137	133	129	125	120	114	108	101	93	84	76				
QF 360-6AA	-	-	-	-	110	150	212	192	183	174	166	157	153	149	144	139	133	126	118	109	98	87	75				
QF 360-6A	-	-	9000017871	-	110	150	223	200	190	181	172	163	159	155	150	145	139	132	124	115	105	95	83				
QF 360-6	-	-	9000003565	-	110	150	234	209	198	187	178	169	165	160	156	151	145	138	130	122	112	102	92				
QF 360-7AA	-	-	9000003578	-	132	177	254	230	220	209	199	190	185	180	174	168	161	153	144	134	122	109	96				
QF 360-7A	-	-	9000003576	-	132	177	265	239	227	216	205	196	191	186	180	174	167	159	151	141	129	117	104				
QF 360-7	-	-	9000003574	-	132	177	277	248	235	223	212	202	197	192	186	180	174	166	157	147	137	125	113				
QF 360-8AA	-	-	9000003584	-	147	204	295	267	255	242	231	220	214	209	202	195	188	179	168	157	144	129	114				
QF 360-8A	-	-	9000003582	-	147	204	306	276	263	249	237	226	221	215	209	202	194	185	175	164	151	137	123				
QF 360-8	-	-	9000003580	-	147	204	318	285	270	256	244	232	227	221	215	208	200	192	182	171	158	145	131				
QF 360-9AA	-	-	9000003590	-	185	252	334	303	289	275	262	249	243	237	230	222	213	203	191	178	164	148	131				
QF 360-9A	-	-	9000003588	-	185	252	346	312	297	282	268	256	249	243	236	228	219	209	198	185	171	156	140				
QF 360-9	-	-	9000003586	-	185	252	358	321	305	289	275	262	255	249	242	234	226	216	205	192	179	164	148				
QF 360-10AA	-	-	-	9000003519	190	260	375	340	324	308	293	279	272	265	257	249	239	228	215	201	185	168	149				
QF 360-10A	-	-	-	9000003517	190	260	386	349	331	315	300	286	279	271	264	255	245	234	222	208	192	175	158				
QF 360-10	-	-	-	9000003515	190	260	398	357	339	322	306	292	285	277	270	261	252	241	229	215	200	183	166				


PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 360

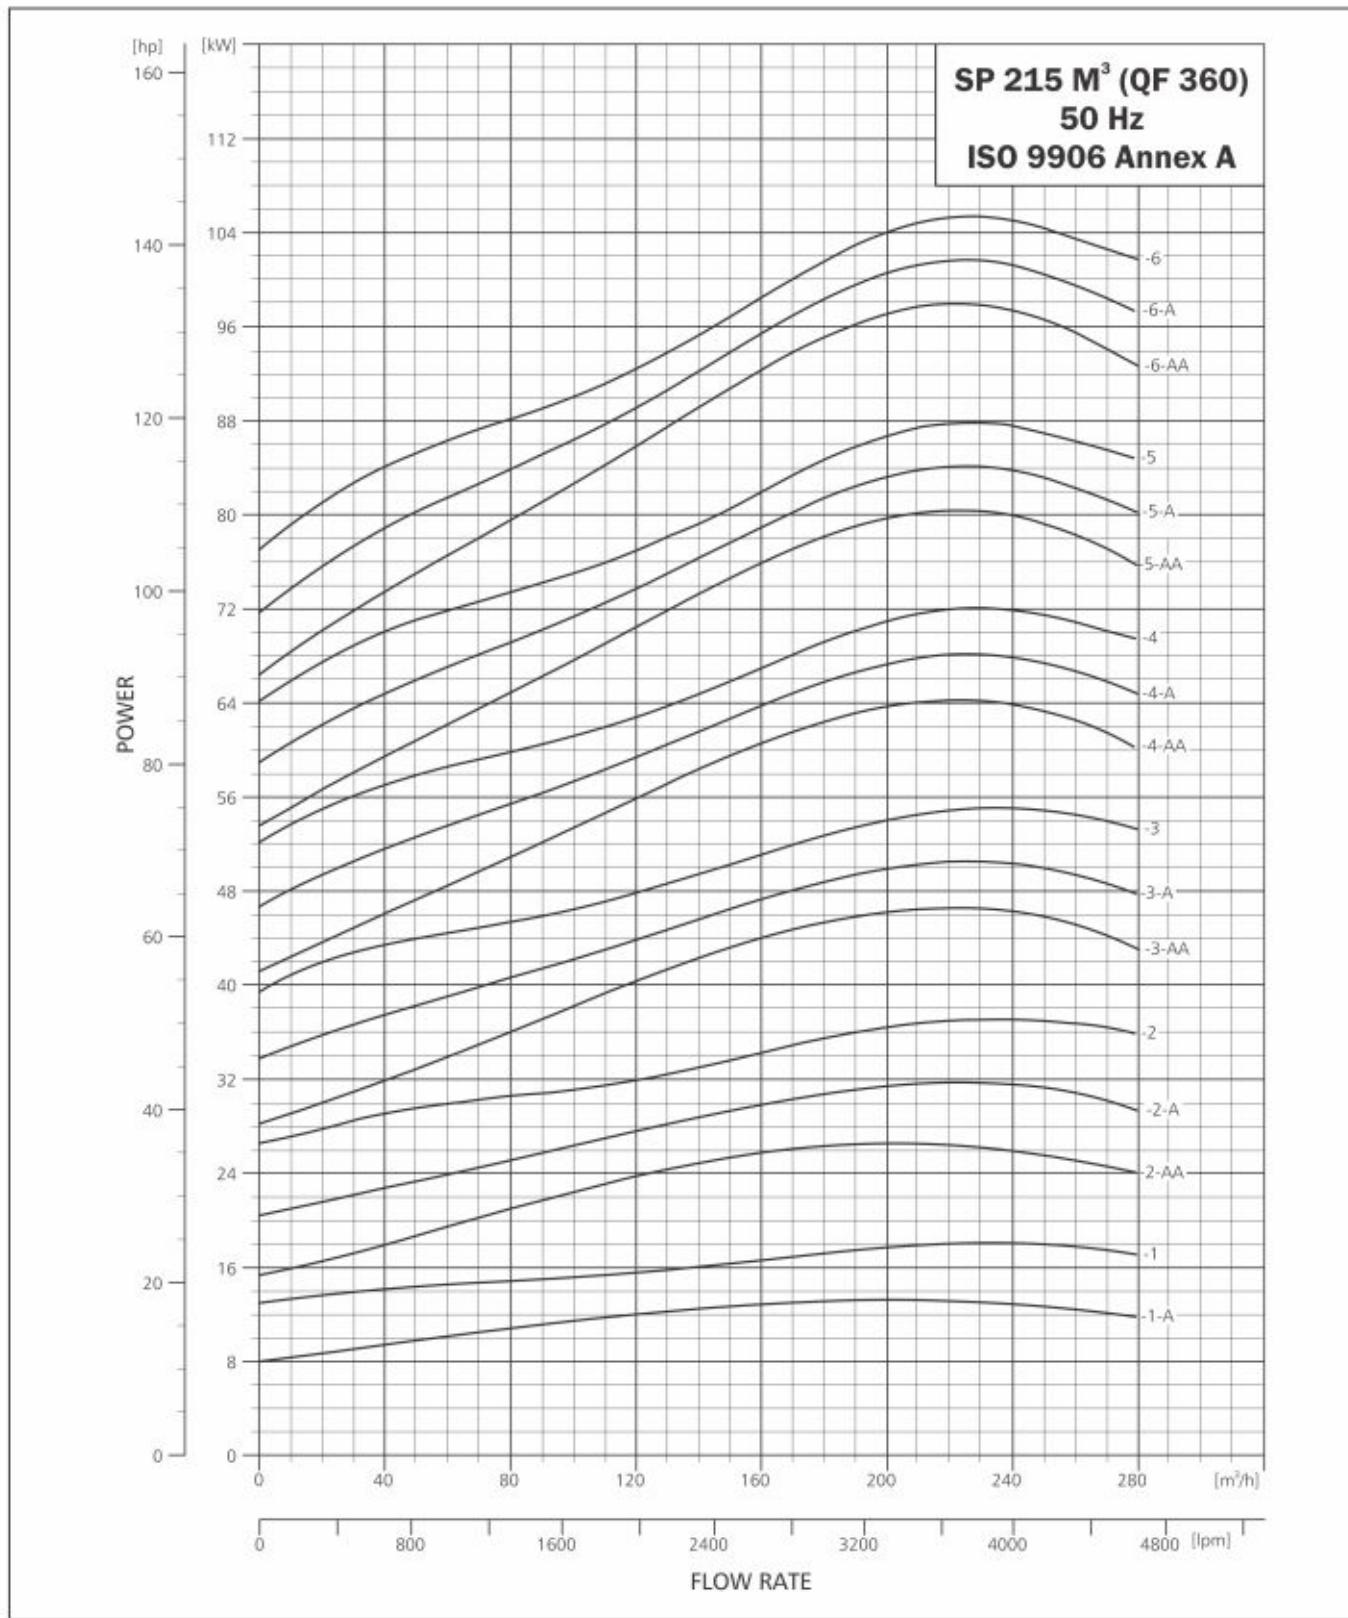

PERFORMANCE CURVE

SUBMERSIBLE PUMP QF 360

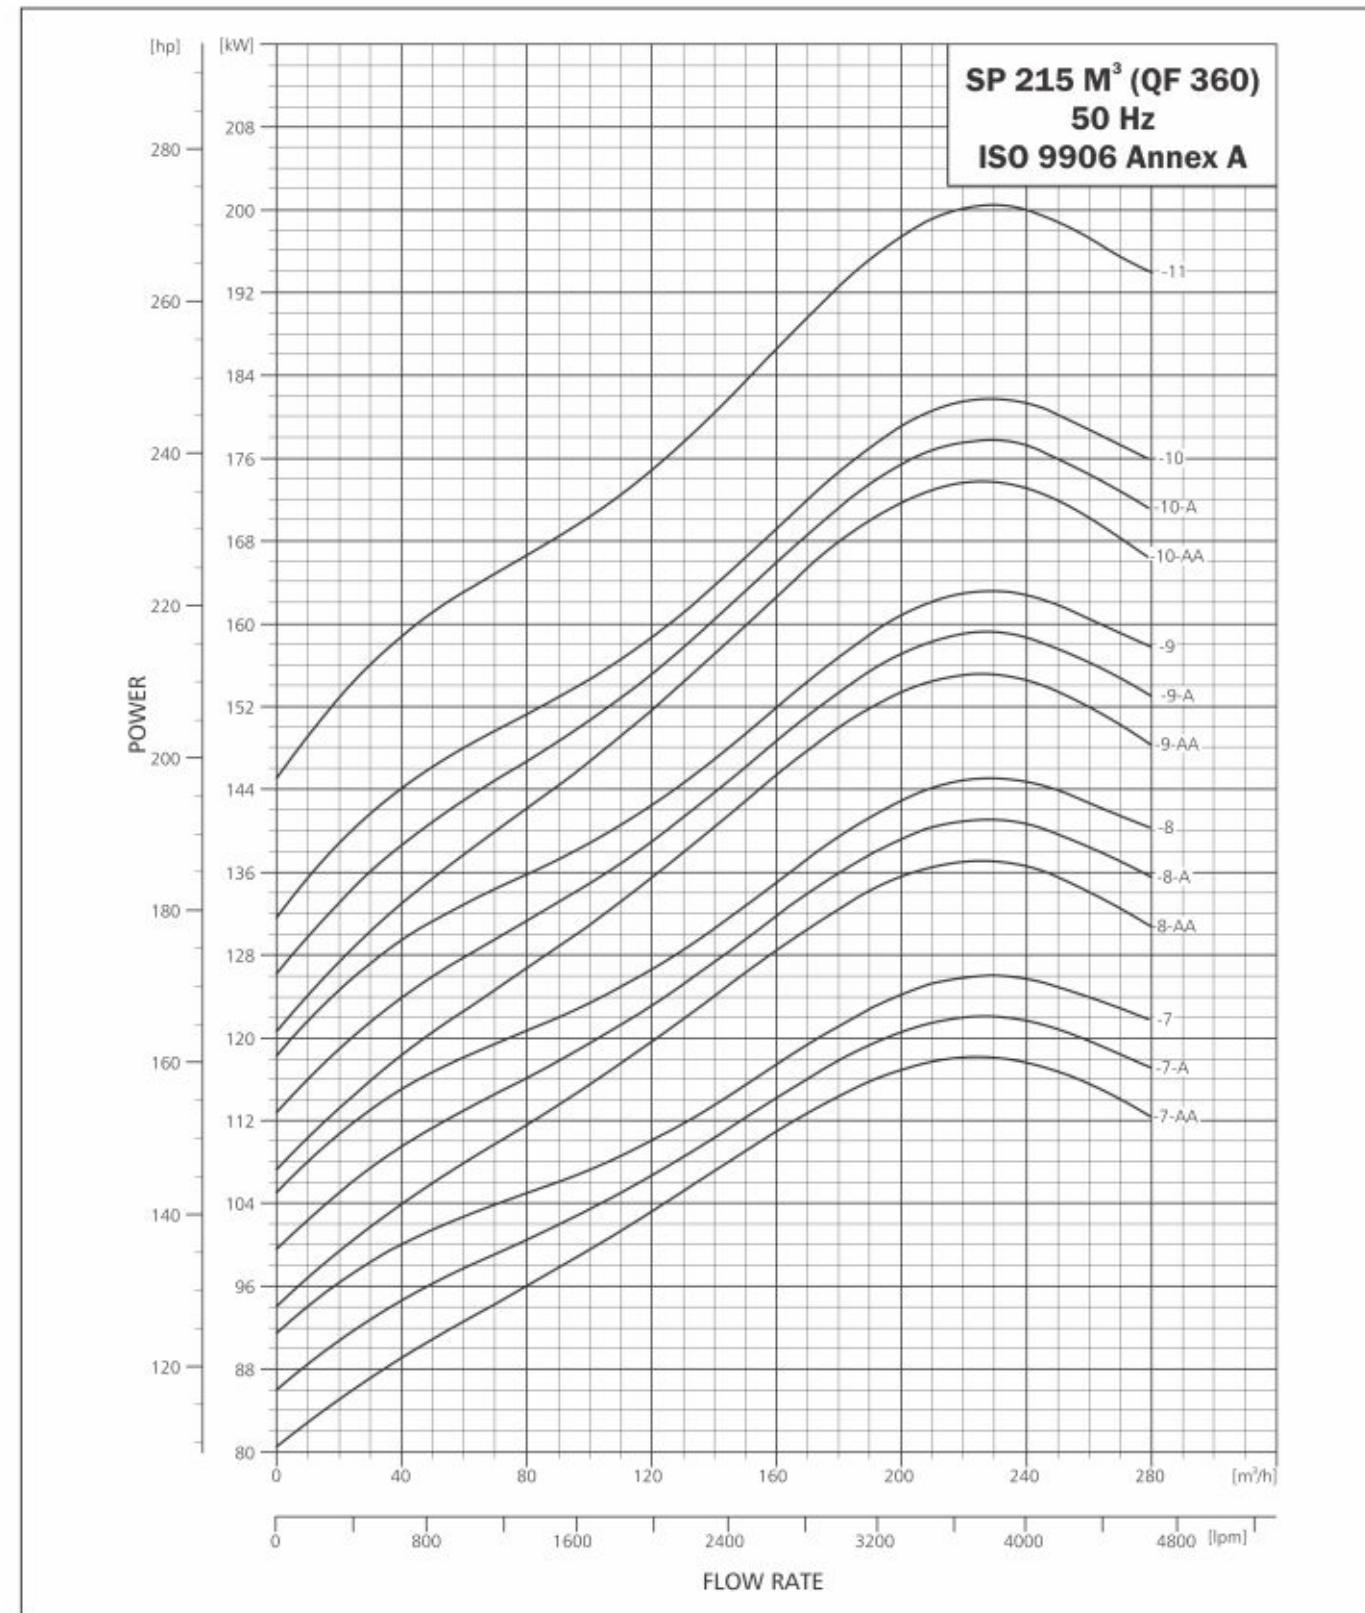

V14 PUMPS

SSP GENERAL DATA (SSP 270, SSP300, SSP 360)



14" WELL SIZE

Models

SSP 270 (SP 270 G m³/h)
SSP 300 (SP 300 G m³/h)
SSP 360 (SP 360 G m³/h)

Operating Condition

Flow Rate, Q - 24 - 430 m³/h
Head, H - Max. 410 meter

Material

Diffuser - Cast Iron
Impeller - Bronze

V14 PUMPS

PUMP RANGE

Type	SSP 270	SSP 300	SSP360
Cast Iron	+	+	+
DIN Connection	DIN 175	DIN 175	DIN 175

MOTOR RANGE

Motor Output 1kW]	22	26	30	37	45	55	75	93	110	132	147	170	190	220
Three Phase	+	+	+	+	+	+	+	+	+	+	+	+	+	+
Rewindable Motor	+	+	+	+	+	+	+	+	+	+	+	+	+	+
Steel: AISI 304	+	+	+	+	+	+	+	+	+	+	+	+	+	+
Steel: AISI 304 & Cast Iron	+	+	+	+	+	+	+	+	+	+	+	+	+	+

Soft starter or auto transformer is recommended above 75 kW, see soft starting. The MMS motors can be operated via frequency converter see Frequency converter operation.

Motors with star-delta are available for all motor sizes.

TYPE KEY

Example SSP 270-2 A	SSP	270	2	A
Type range				
Rated flow in m ³ /h				
Number of impellers				
Impeller type				

PUMPED LIQUIDS

Clean, thin, non-aggressive liquids without solid particles or fibers.

Maximum sand contents : 50 g/m³

OPERATING CONDITIONS

Flow Rate, Q : 24-430 m³/h
Head, H : Maximum 410 m
Operating Pressure : Maximum 60 bar
Storage temperature : Pump: -20 °C to +60 °C
Motor: -20 °C to +70 °C.

Motor	Installation		
	Flow velocity past motor	Vertical	Horizontal
8", 10" & 12"	0.15 m/s	40 °C	40 °C

FEATURES & BENEFITS

PUMP RANGE

The SSP pump range consists of pumps which can deliver a higher pressure or a higher flow compared to the rest of the QF pump range offered by Shakti.

SSP Pumps are semi-axial pumps. They are suitable for applications requiring a flow up to $430 \text{ m}^3/\text{h}$ and a head up to 410 m head.

All pumps are available with an optional number of stages to match any duty point.

PRODUCT FEATURES


Bearings with sand channels

All bearings are constructed in such a way that channels are formed along the shaft enabling sand, if any, to leave the pump with the pumped liquid.

The bearings in SSP Pumps are Octagonal on the inside.

INLET STRAINER (Fig. no. 1)


The inlet strainer prevents particles over a certain size from entering and damaging the pump.

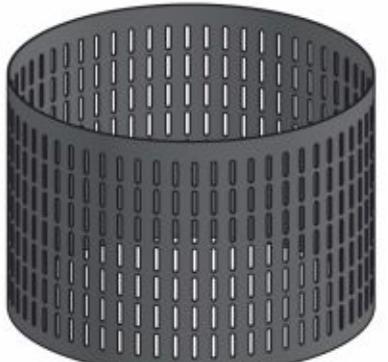

(Fig. no. 1)


PROTECTION AGAINST UPTHURST (Fig. no.2)

The pump range has a screwed connection between the coupling of the pump and the motor shaft ensuring that upthrust in the pump, if any, is transferred to the stop ring of

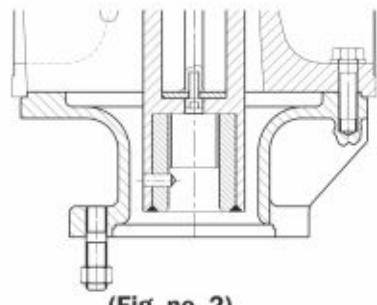

(Fig. no. 2)

PERFORMANCE RANGE

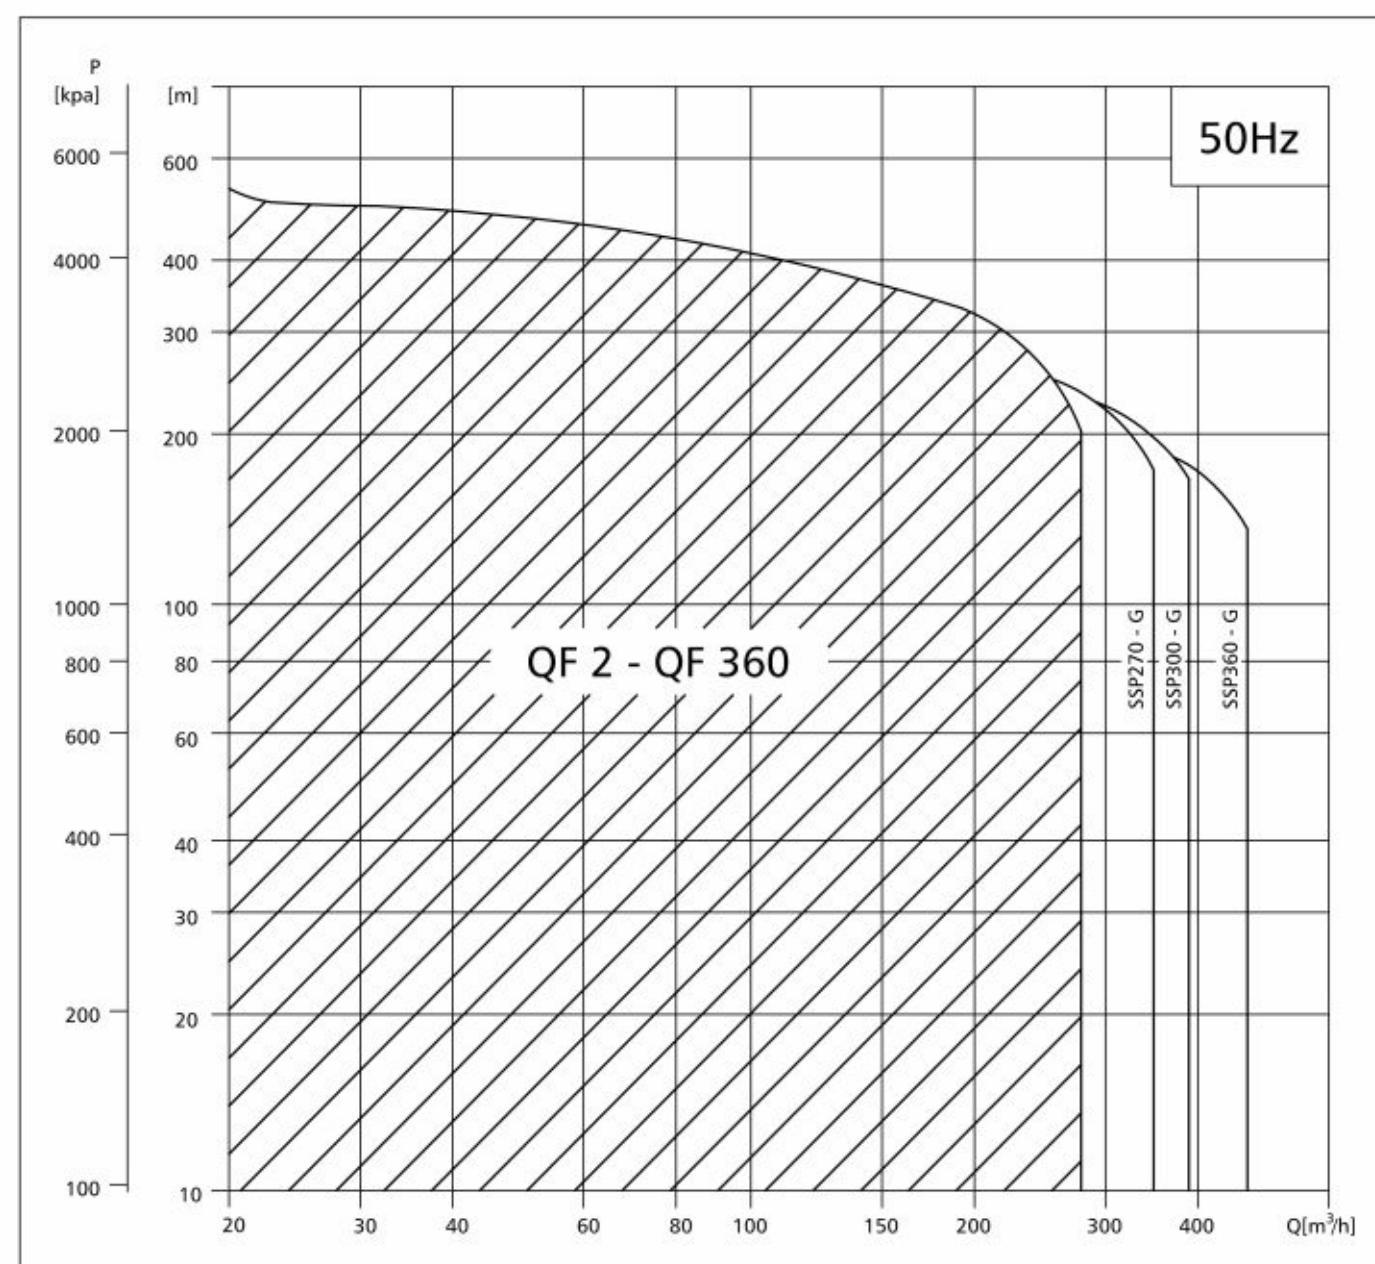


VALVE CASING (Fig. no.3)

All pumps are equipped with a reliable non-return valve in the valve casing preventing back flow in connection with pump stoppage.

The valve casing is designed for optimum hydraulic properties to minimize the pressure loss across the Valve and thus contribute to minimizing the total pressure loss of the pump.

Furthermore, the short closing time of the non-return valve means that the risk of destructive water hammer is reduced to a minimum.

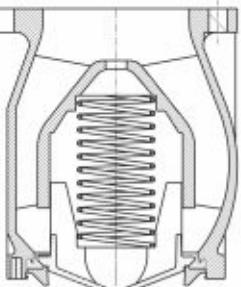

(Fig. no. 3)

NECK RING (Fig. no.4)

All pumps have a replaceable neck ring in each chamber.

This means that the neck ring can be replaced easily in case of wear.



(Fig. no. 4)

SUBMERSIBLE PUMPS


PERFORMANCE CURVE

SUBMERSIBLE PUMP SSP-270


MATERIAL SPECIFICATION SSP-270

SR.NO.	DESCRIPTION	MATERIAL	MATERIAL
1	VALVE CASING	CAST IRON	CI-FG-260
1d	BOWL O-RING	RUBBER	NBR
2	VALVE CUP	BRONZE	LBT-2
3	VALVE SEAT	RUBBER	NBR
3a	VALVE SEAT RETAINER	BRONZE	LBT-2
4	TOP CHAMBER	CAST IRON	CI-FG-260
6	TOP BEARING BUSH	BRONZE	LBT-4
7	WEARING RING	BRONZE	LBT-4
8	BEARING BUSH	SS+RUBBER	SS-304+NBR
9	INTER CHAMBER	CAST IRON	CI-FG-260
12	BEARING SLEEVE	STAINLESS STEEL	AISI SS-304
13	IMPELLER	BRONZE	LBT-2
14	SUCTION INTERCONNECTOR	CAST IRON	CI-FG-260
15	STRAINER	STAINLESS STEEL	AISI SS-304
16	SHAFT	STAINLESS STEEL	DUPLEX
18	CABLE GUARD	STAINLESS STEEL	AISI SS-304
24	COUPLING	STAINLESS STEEL	AISI SS-304
35a	STUD	STAINLESS STEEL	AISI SS-304
35b	NUT	STAINLESS STEEL	AISI SS-304
73	SUCTION CASE ADAPTER	CAST IRON	CI-FG-260

SECTIONAL VIEW OF SSP-270 PUMP ASSLY

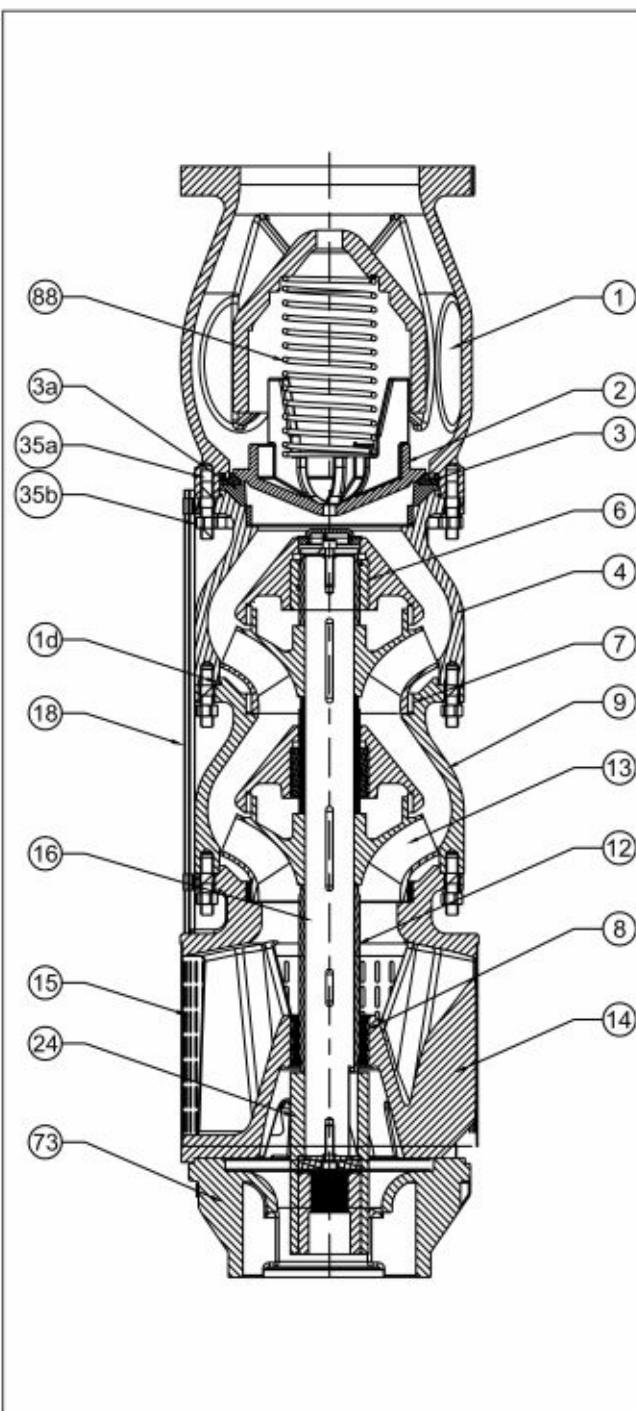


SUBMERSIBLE PUMP SSP-270

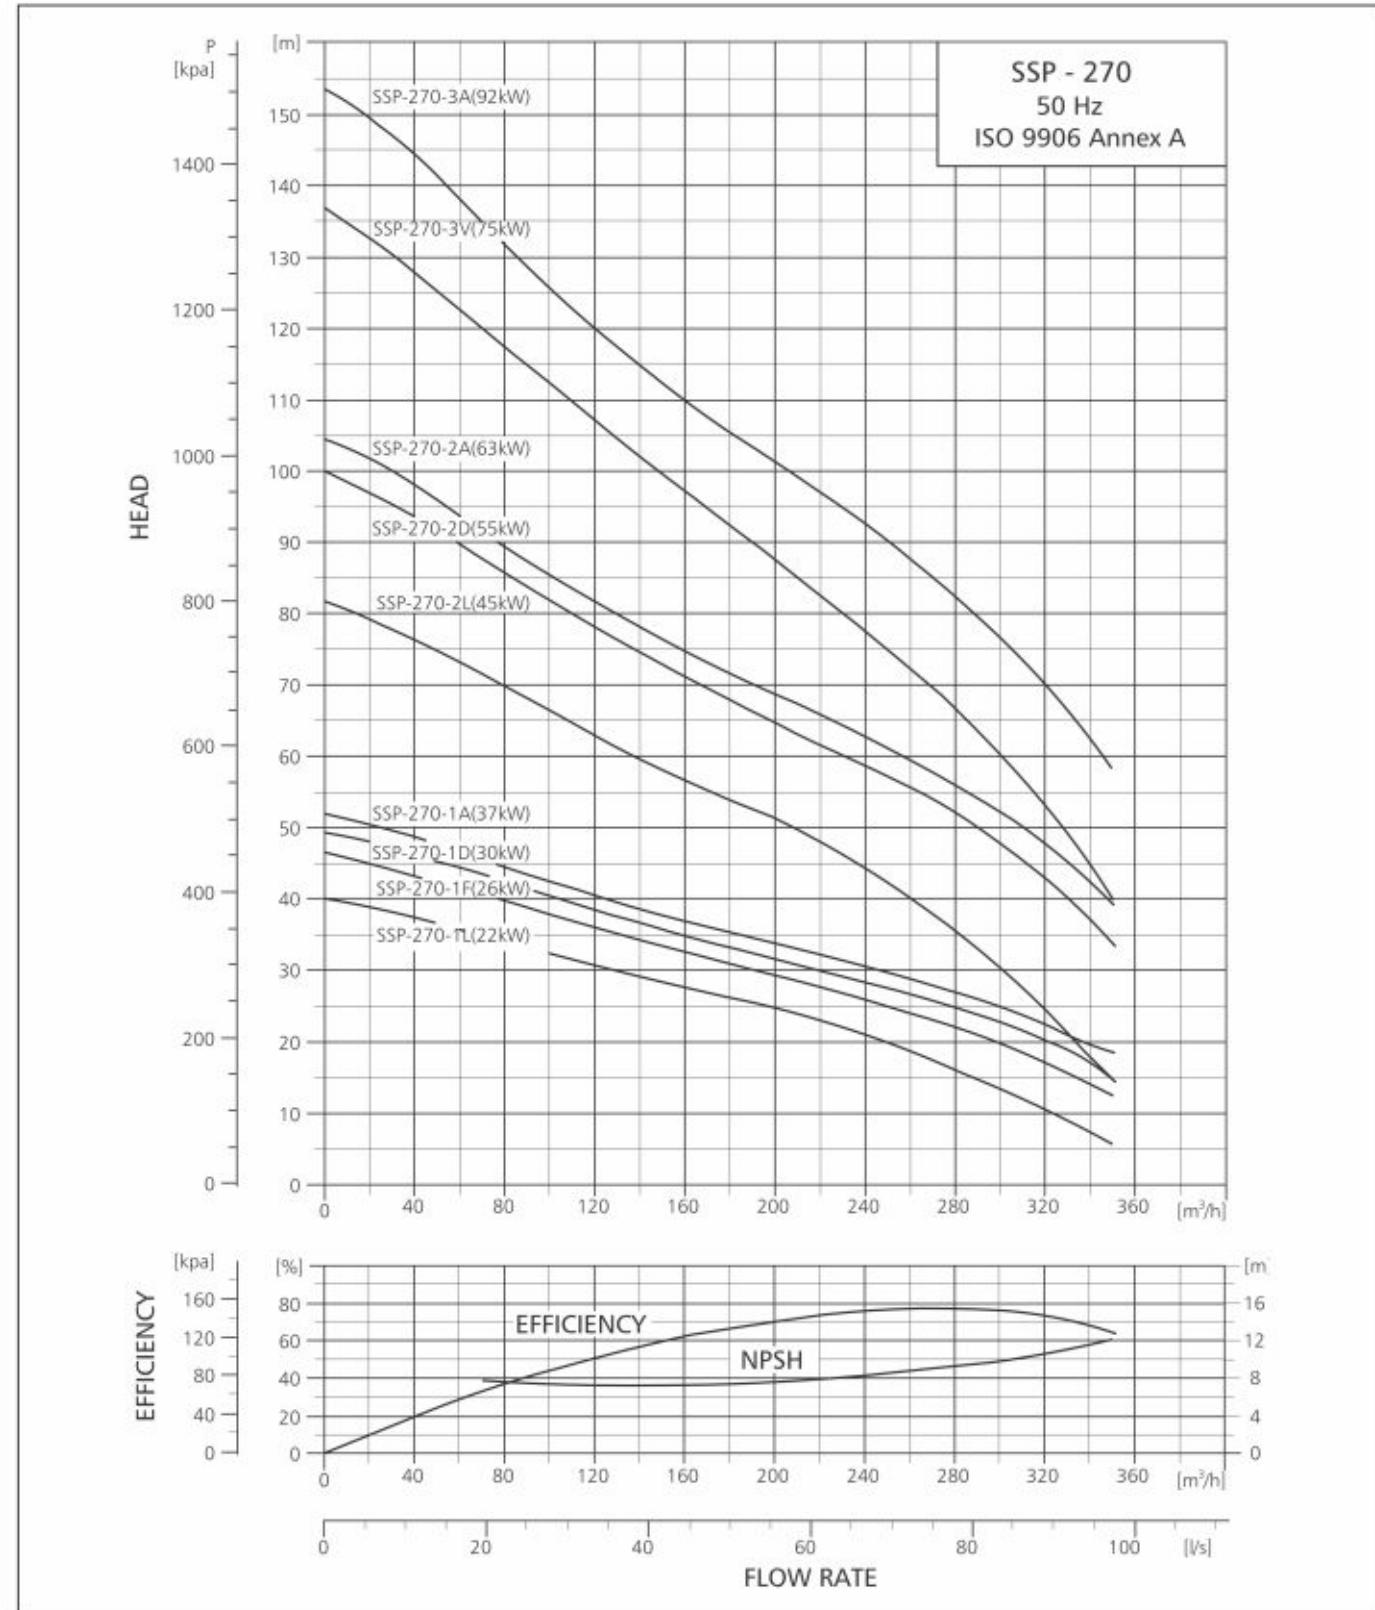

PERFORMANCE CURVE


SUBMERSIBLE PUMP SSP-270

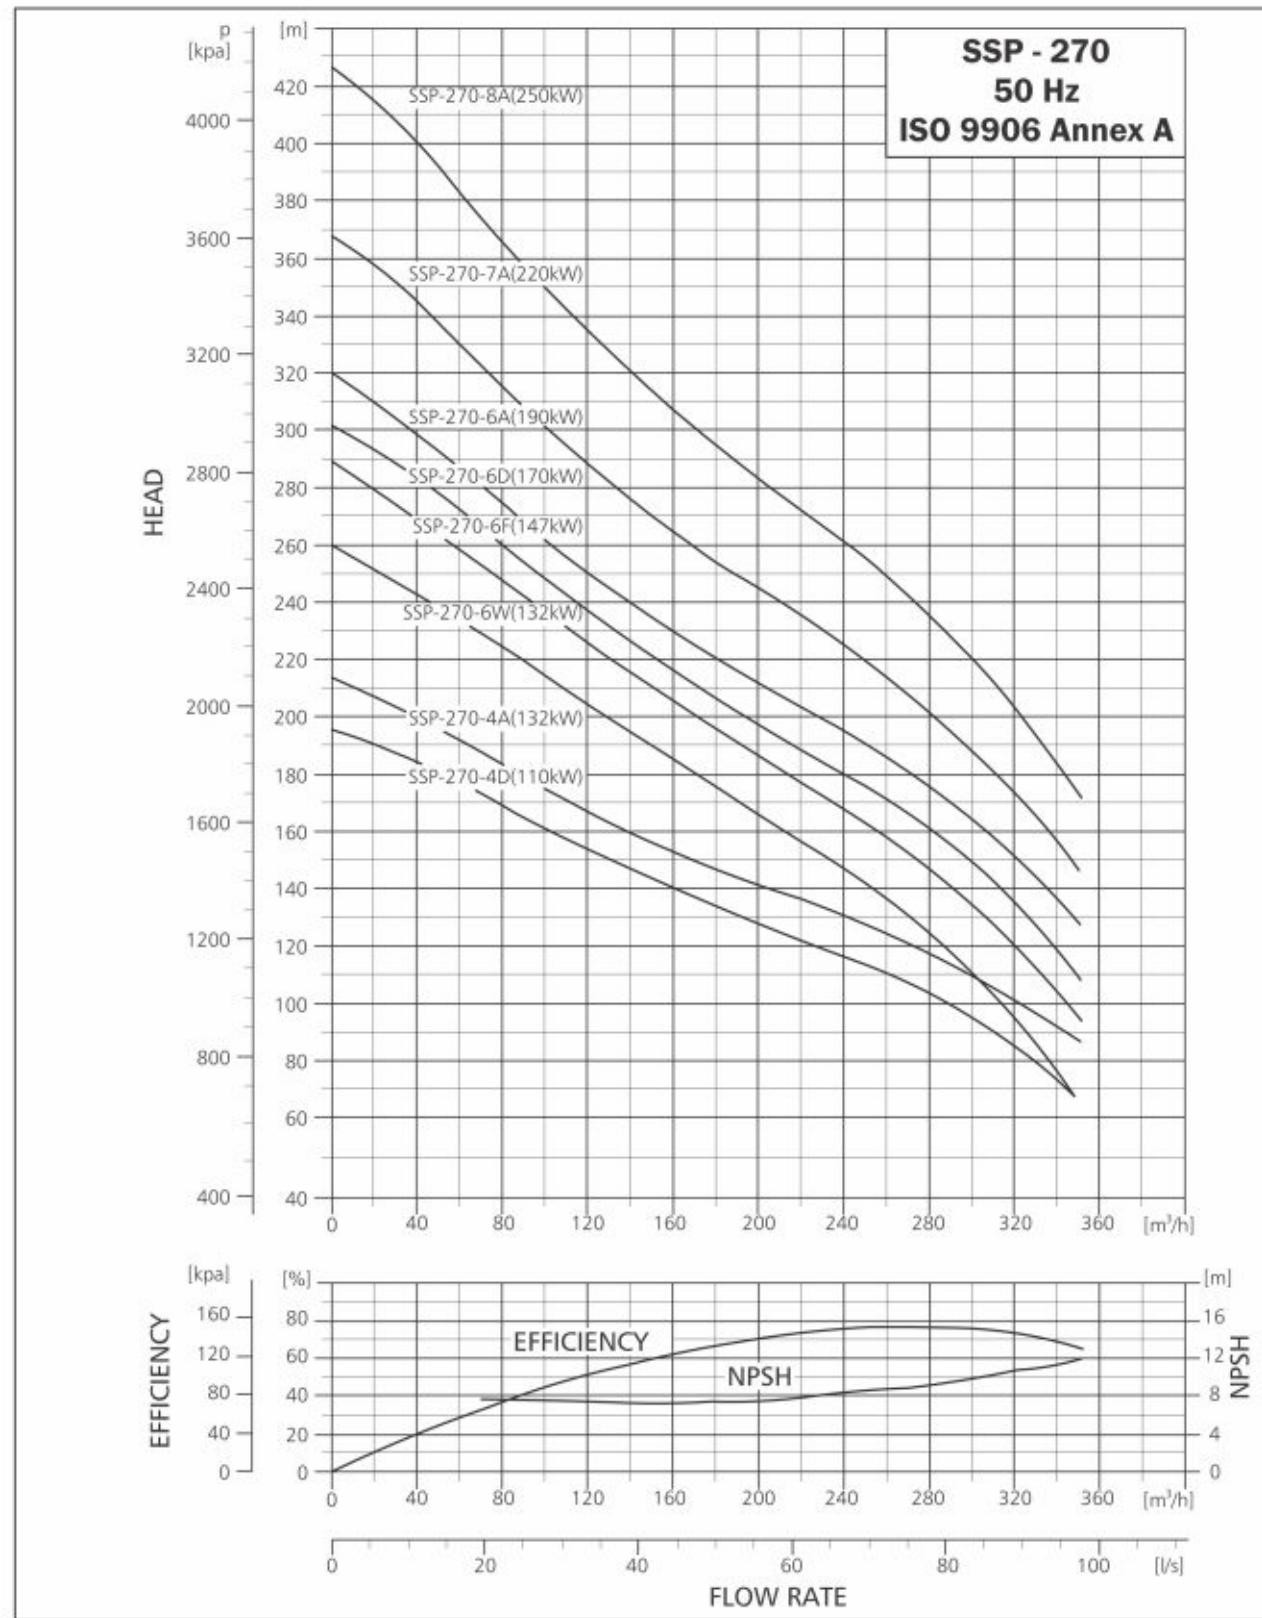

TECHNICAL DATA

SUBMERSIBLE PUMP SSP-270

DIMENSIONS AND WEIGHTS

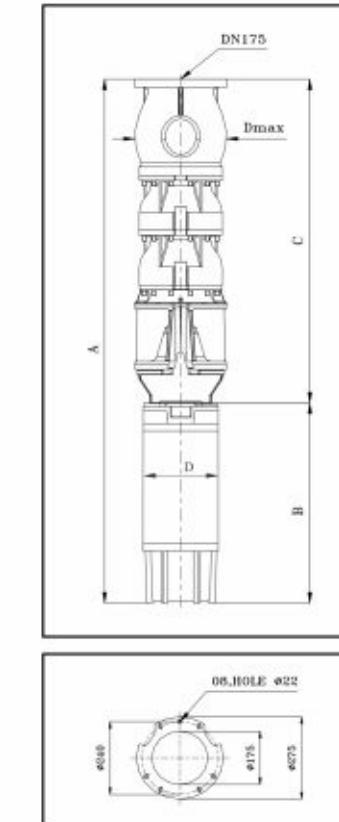

TECHNICAL DATA SSP-270

PUMP TYPE	MOTOR		DIMENSIONS (MM)				NET WEIGHT (KG) PUMPS SET
	TYPE	POWER (kW)	C	B	A	D	
SSP 270-1L	MATSFC8"	22	885	1040	1925	192	266
SSP 270-1F	MATSFC8"	26	885	1140	2025	192	274
SSP 270-1D	MATSFC8"	30	885	1140	2025	192	286
SSP 270-1A	MATSFC8"	37	885	1140	2025	192	296
SSP 270-2L	MATSFC8"	45	1065	1230	2295	192	342
SSP 270-2D	MATSFC8"	55	1065	1340	2405	192	357
SSP 270-2A	MATSFC8"	63	1065	1470	2535	192	383
SSP 270-3V	MATSFC8"	75	1245	1560	2805	192	427
SSP 270-3A	MATSFC8"	93	1245	1740	2985	192	473
SSP 270-4D	MATSF8"	110	1425	1920	3345	192	523
SSP 270-4D	MATSF10"	110	1425	2761	4186	237	605
SSP 270-4A	MATSF10"	132	1425	3021	4446	237	655
SSP 270-6W	MATSF10"	132	1785	3021	4806	237	705
SSP 270-6F	MATSF10"	147	1785	3241	5026	237	770
SSP 270-6D	MATSF12"	170	1785	3541	5326	286	890
SSP 270-6A	MATSF12"	190	1785	3541	5326	286	935
SSP 270-7A	MATSF12"	220	1965	1893	3858	286	1010
SSP 270-8A	MATSF12"	250	2145	1893	4038	286	1100

Dmax (6", 8", 10" and 12") : 290mm


PERFORMANCE TABLE SSP 270

SSP 270				DISCHARGE (Q)							
				m³/h	0	40	80	120	160	200	240
MODEL	MATERIAL			MOTOR RATING		TOTAL HEAD IN (m)					
	6" joining	8" joining	10" joining	12" joining	[kW]	[HP]	0	40	80	120	160
SSP270-1 L	9000010964	-	-	-	22	30	40	38	34	31	28
SSP270-1F	9000010961	-	-	-	26	35	47	43	40	37	33
SSP270-1D	9000010962	-	-	-	30	40	49	47	43	38	35
SSP270-1A	9000010963	-	-	-	37	50	52	49	45	41	37
SSP270-2L	-	9000018456	-	-	45	60	82	77	69	63	57
SSP270-2D	-	9000010965	-	-	55	75	100	93	86	78	72
SSP270-2A	-	9000010966	-	-	63	85	104	98	88	82	75
SSP270-3V	-	9000010967	-	-	75	100	137	128	117	107	97
SSP270-3A	-	9000010968	-	-	92	125	153	144	133	121	111
SSP270-4D	-	-	9000010969	-	110	150	195	185	170	155	141
SSP270-4A	-	-	9000010970	-	132	177	213	200	184	168	152
SSP270-6W	-	-	9000010971	-	132	177	260	243	225	205	185
SSP270-6F	-	-	9000010972	-	147	197	289	268	248	226	205
SSP270-6D	-	-	9000010973	-	170	252	302	285	260	238	217
SSP270-6A	-	-	9000010974	-	190	252	320	298	275	250	230
SSP270-7A	-	-	-	9000010975	220	295	367	346	315	290	264
SSP270-8A	-	-	-	9000010976	250	335	425	400	366	335	308

This Performance Table is Approximate as a Performance Curve
Technical Change without notice


PERFORMANCE CURVE

SUBMERSIBLE PUMP SSP-270

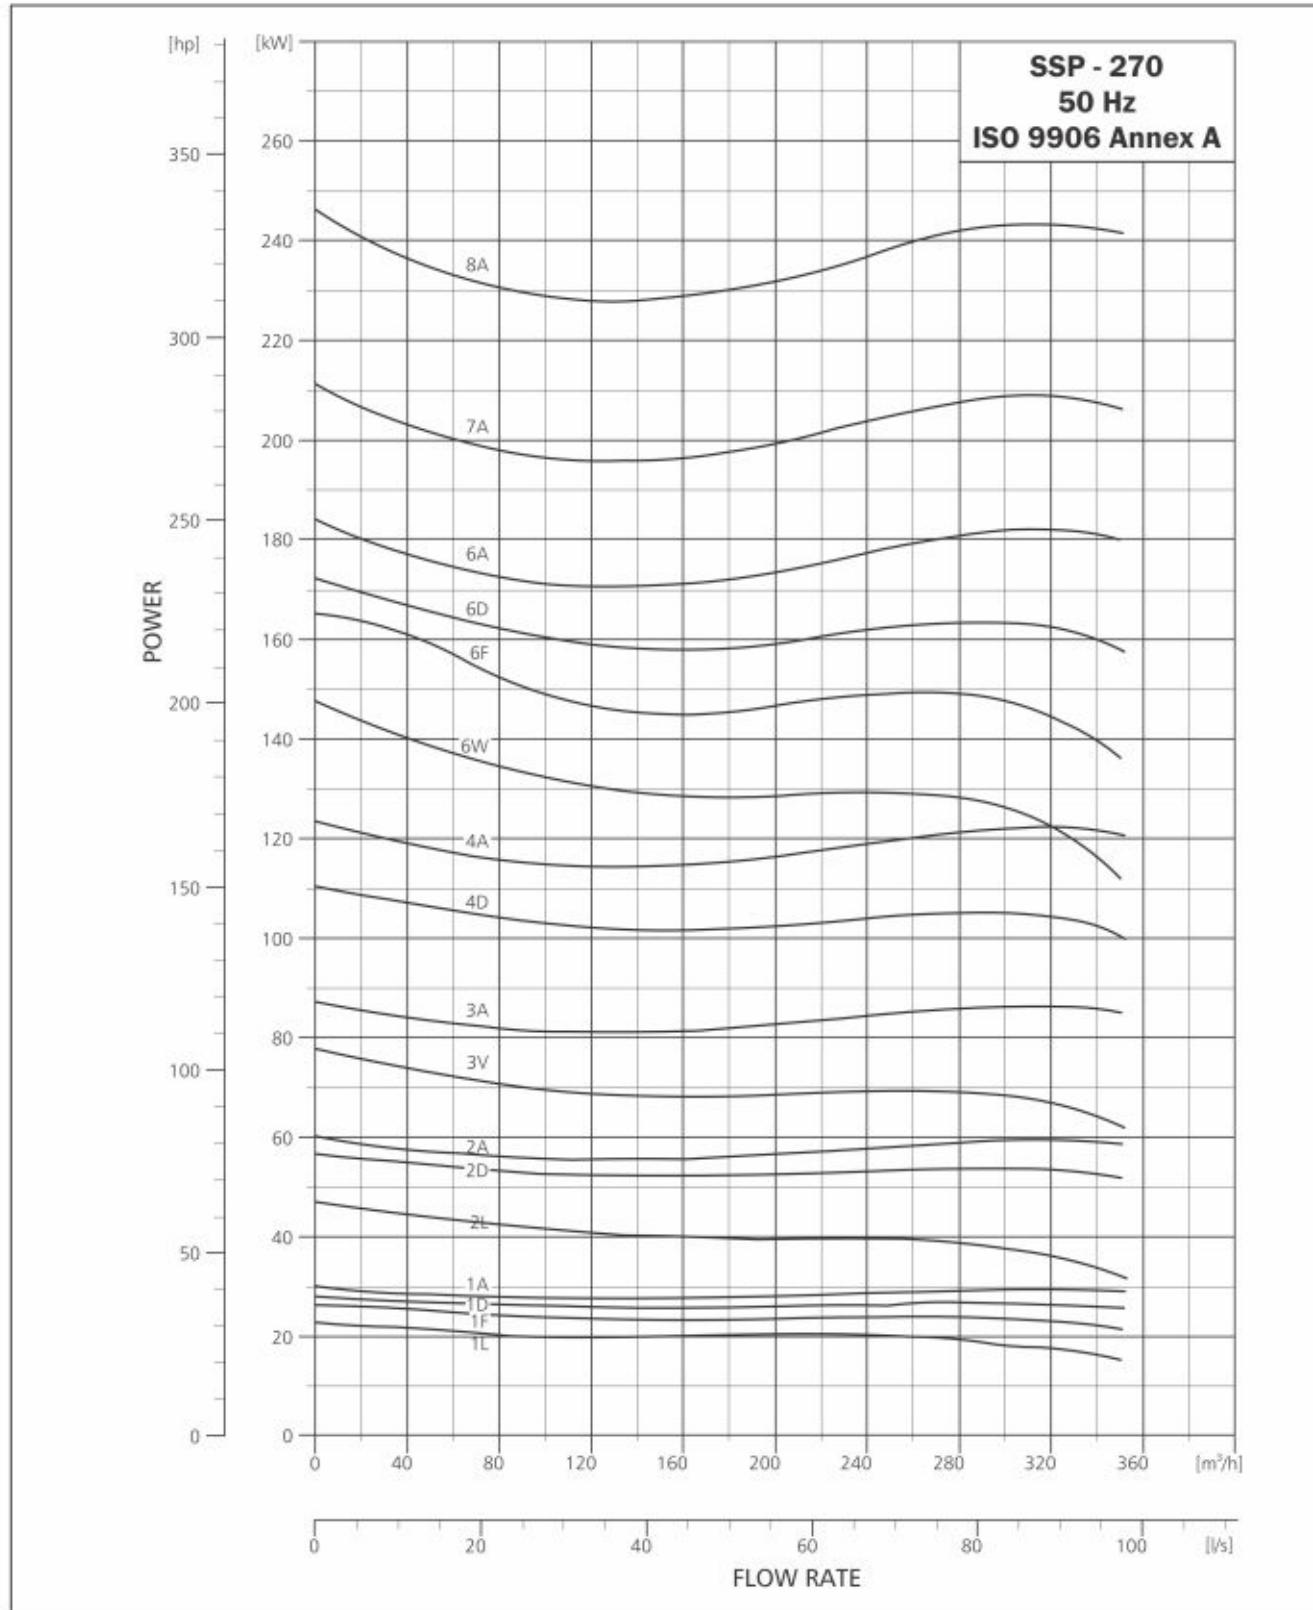


PERFORMANCE CURVE

SUBMERSIBLE PUMP SSP-300

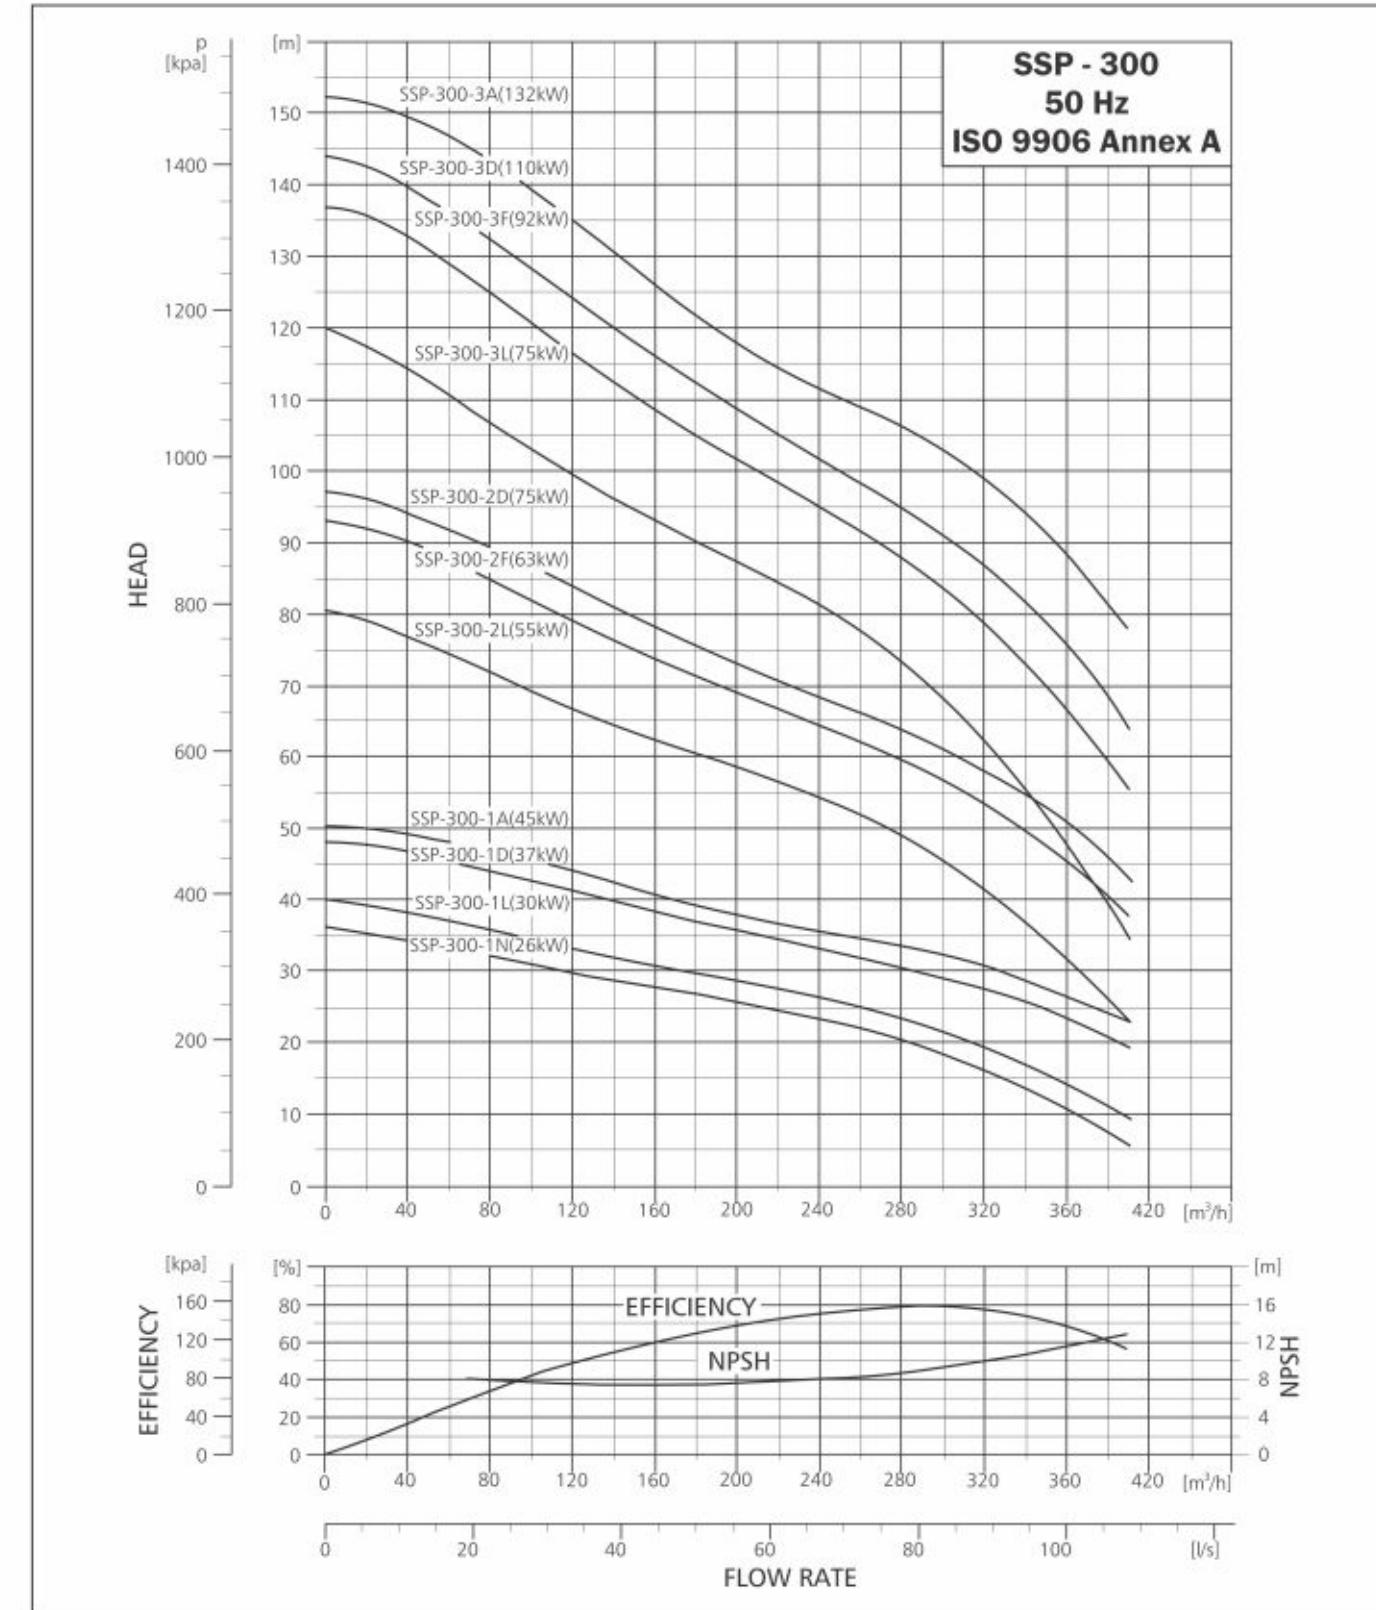

PERFORMANCE CURVE


SUBMERSIBLE PUMP SSP-300

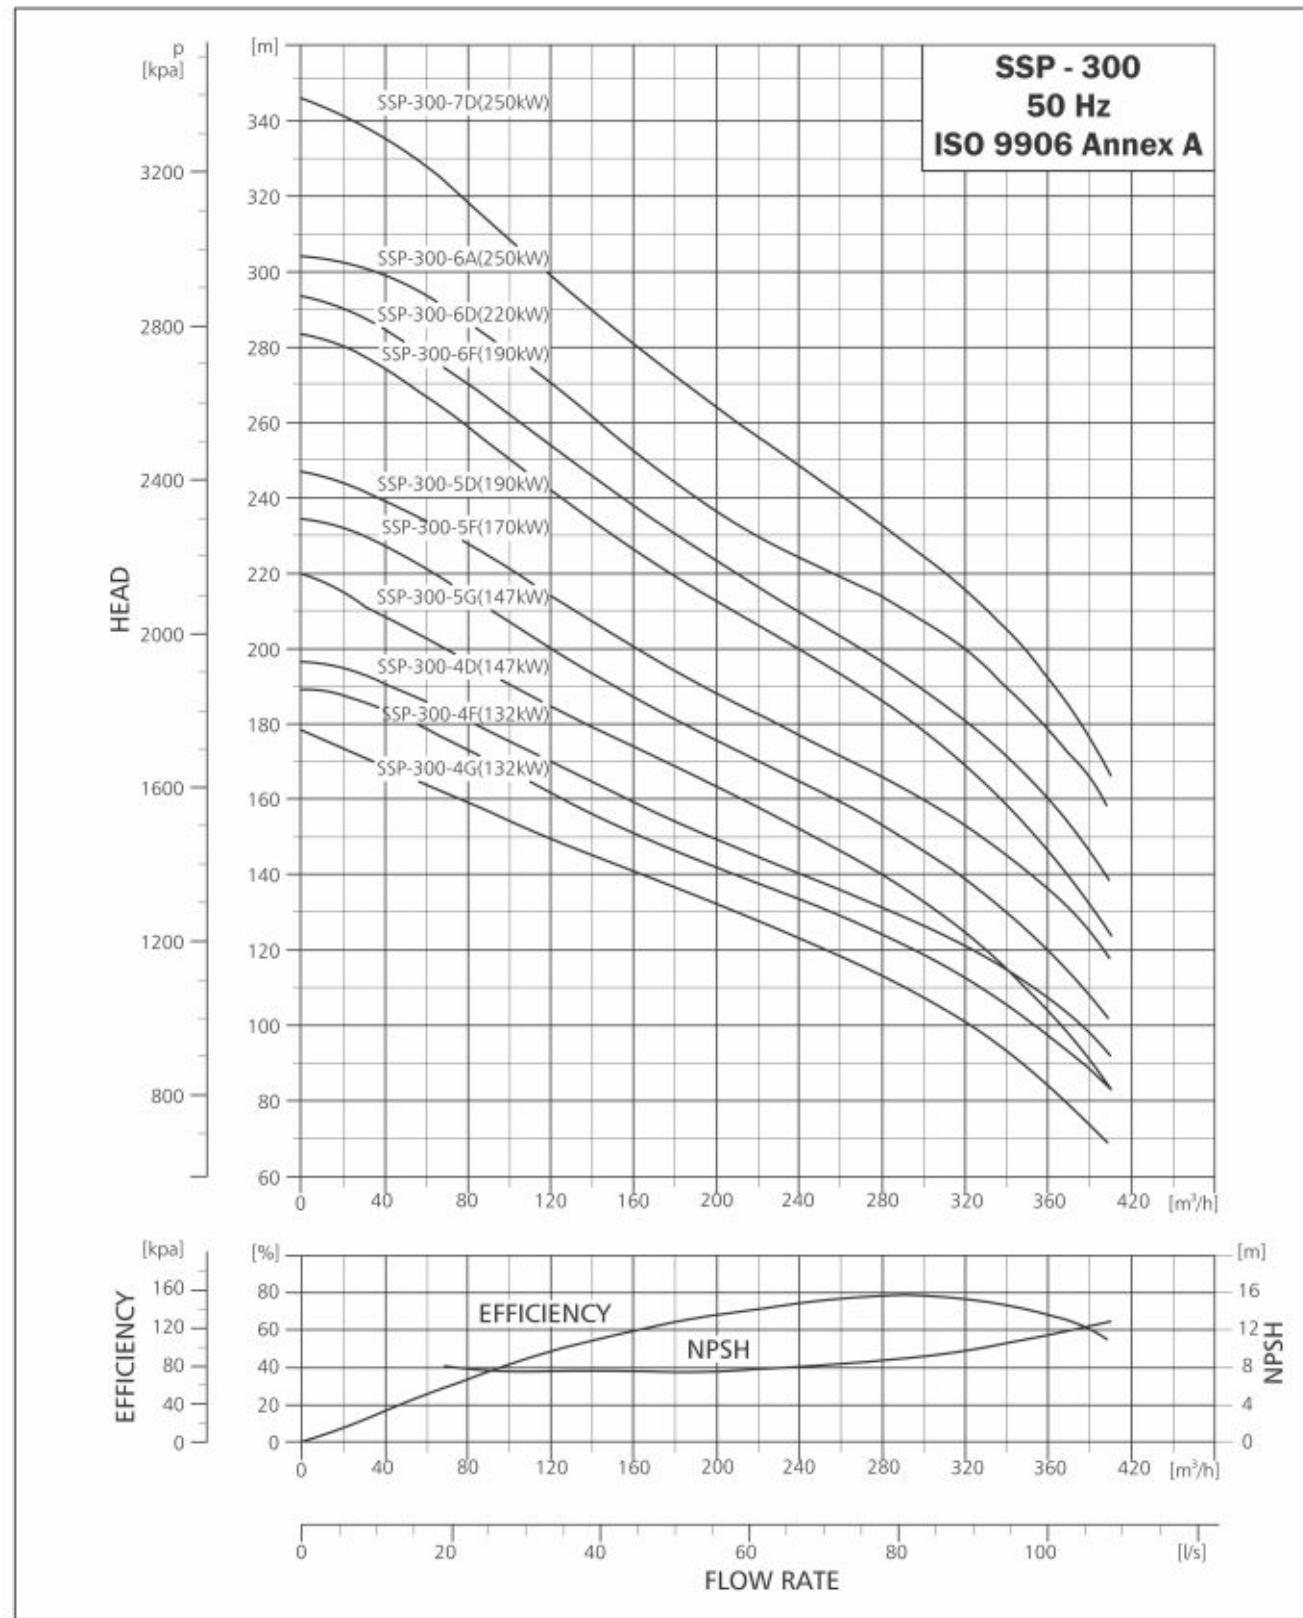

TECHNICAL DATA

SUBMERSIBLE PUMP SSP-300

DIMENSIONS AND WEIGHTS

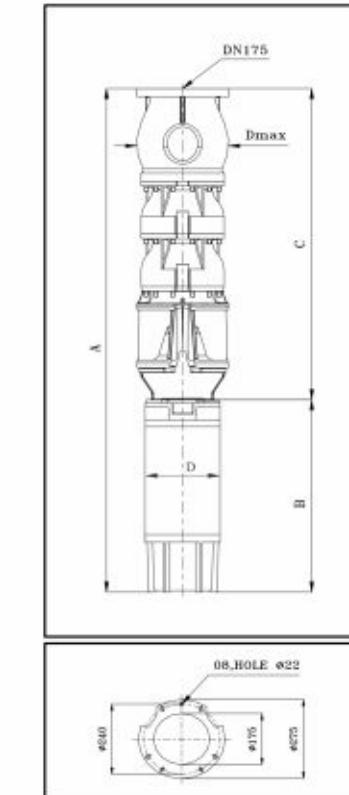

TECHNICAL DATA SSP-300

PUMP TYPE	MOTOR		DIMENSIONS (MM)				NET WEIGHT (KG) PUMPS SET
	TYPE	POWER (kW)	C	B	A	D	
SSP300-1N	MATSF8"	26	885	1085	1970	192	266
SSP300-1L	MATSF8"	30	885	1140	2025	192	286
SSP300-1D	MATSF8"	37	885	1140	2025	192	296
SSP300-1A	MATSF8"	45	885	1230	2115	192	317
SSP300-2L	MATSF8"	55	1065	1340	2405	192	357
SSP300-2F	MATSF8"	63	1065	1470	2535	192	383
SSP300-2D	MATSF8"	75	1065	1560	2625	192	402
SSP300-3L	MATSF8"	75	1245	1560	2805	192	427
SSP300-3F	MATSF8"	92	1245	1740	2985	192	473
SSP300-3D	MATSF8"	110	1245	1934	3179	192	523
SSP300-3D	MATSF10"	110	1245	1529	2774	237	580
SSP300-3A	MATSF10"	132	1245	1659	2904	237	630
SSP300-4G	MATSF10"	132	1425	1659	3084	237	655
SSP300-4F	MATSF10"	132	1425	1659	3084	237	655
SSP300-4D	MATSF10"	147	1425	1769	3194	237	720
SSP300-5G	MATSF10"	147	1605	1769	3374	237	745
SSP300-5F	MATSF12"	170	1605	1919	3524	286	865
SSP300-5D	MATSF12"	190	1605	1743	3348	286	910
SSP300-6F	MATSF12"	190	1785	1743	3528	286	935
SSP300-6D	MATSF12"	220	1785	1743	3528	286	985
SSP300-6A	MATSF12"	250	1785	1893	3678	286	1060
SSP300-7D	MATSF12"	250	1965	1893	3858	286	1085

Dmax (6", 8", 10" and 12")=290mm


PERFORMANCE TABLE SSP 300

MODEL	SSP 300				DISCHARGE (Q)											
	6" joining	8" joining	10" joining	12" joining	MOTOR RATING		TOTAL HEAD IN (m)									
					[kW]	[HP]	0	40	80	120	160	200	240			
SSP300-1 N	-	-	-	-	26	35	37	34	32	29	28	26	23	21	16	11
SSP300-1L	9000010978	-	-	-	30	40	40	38	36	33	31	27	27	24	19	14
SSP300-1D	9000014266	-	-	-	37	50	47	47	44	42	38	36	34	31	28	24
SSP300-1A	-	9000010980	-	-	45	60	50	49	46	44	41	38	36	33	31	26
SSP300-2L	-	9000010981	-	-	55	75	82	77	72	66	62	58	54	49	41	31
SSP300-2F	-	9000010982	-	-	63	85	93	92	85	78	73	68	64	59	53	51
SSP300-2D	-	9000010983	-	-	75	100	97	94	89	84	77	73	68	64	58	46
SSP300-3L	-	9000010984	-	-	75	100	120	114	107	99	93	87	81	74	62	47
SSP300-3F	-	9000010985	-	-	92	125	137	136	125	118	108	103	95	87	78	66
SSP300-3D	-	-	9000010986	-	110	150	148	140	133	124	117	109	103	95	87	76
SSP300-3A	-	-	9000013929	-	132	177	152	148	143	135	126	117	112	107	98	88
SSP300-4G	-	-	9000010988	-	132	177	179	170	158	150	141	132	123	114	101	84
SSP300-4F	-	-	9000010989	-	132	177	189	183	173	162	151	142	134	124	112	98
SSP300-4D	-	-	9000010990	-	147	197	196	192	182	170	159	149	140	131	121	108
SSP300-5G	-	-	9000010991	-	147	197	220	208	195	184	174	163	152	140	124	104
SSP300-5F	-	-	9000010992	-	170	252	234	228	213	200	187	176	165	154	139	120
SSP300-5D	-	-	-	9000010993	190	252	248	239	224	214	201	188	178	166	154	136
SSP300-6F	-	-	-	9000010994	190	252	283	272	258	242	226	212	200	186	169	148
SSP300-6D	-	-	-	9000010995	220	295	294	285	270	254	238	223	210	196	181	160
SSP300-6A	-	-	-	9000010996	250	335	304	299	288	270	252	237	225	214	200	179
SSP300-7D	-	-	-	9000010997	250	335	345	335	318	300	281	264	248	232	215	192

This Performance Table is Approximate as a Performance Curve
Technical Change without notice


PERFORMANCE CURVE

SUBMERSIBLE PUMP SSP-300

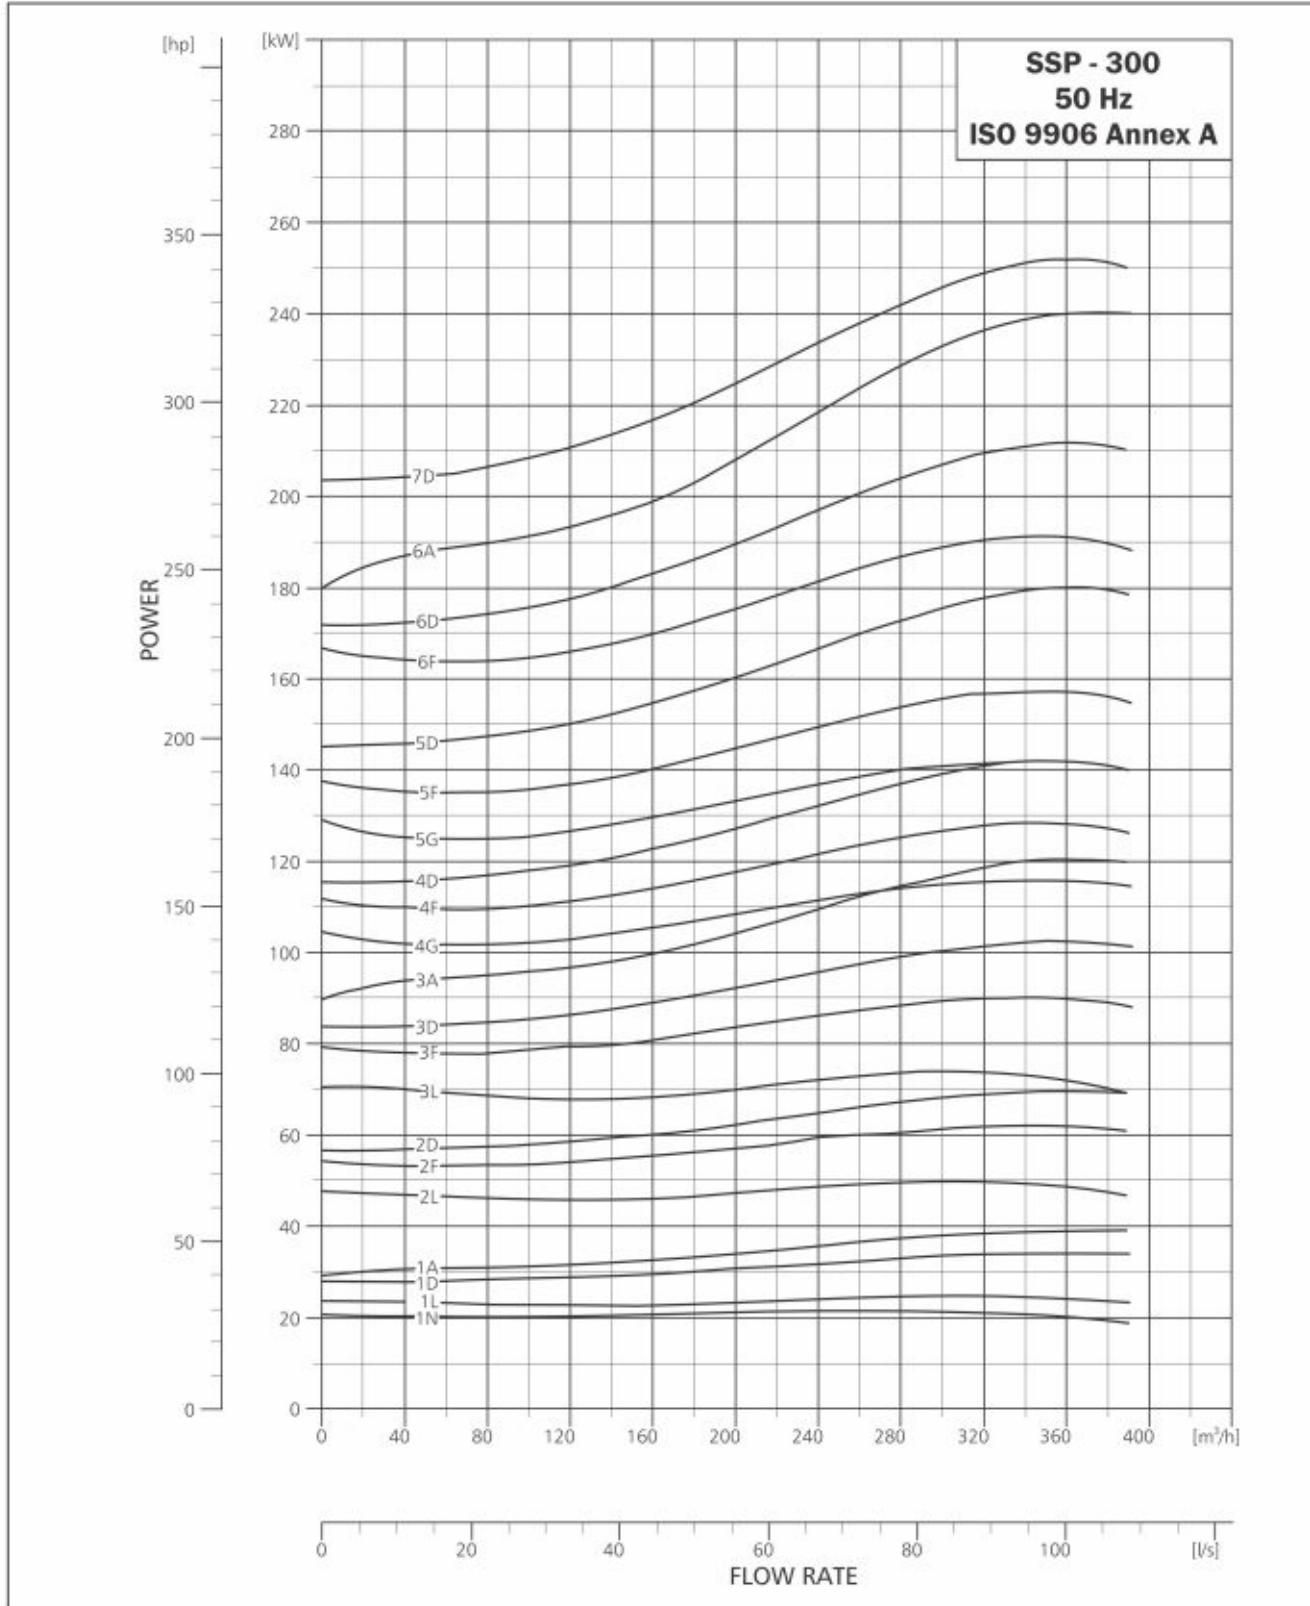


PERFORMANCE CURVE

SUBMERSIBLE PUMP SSP-360

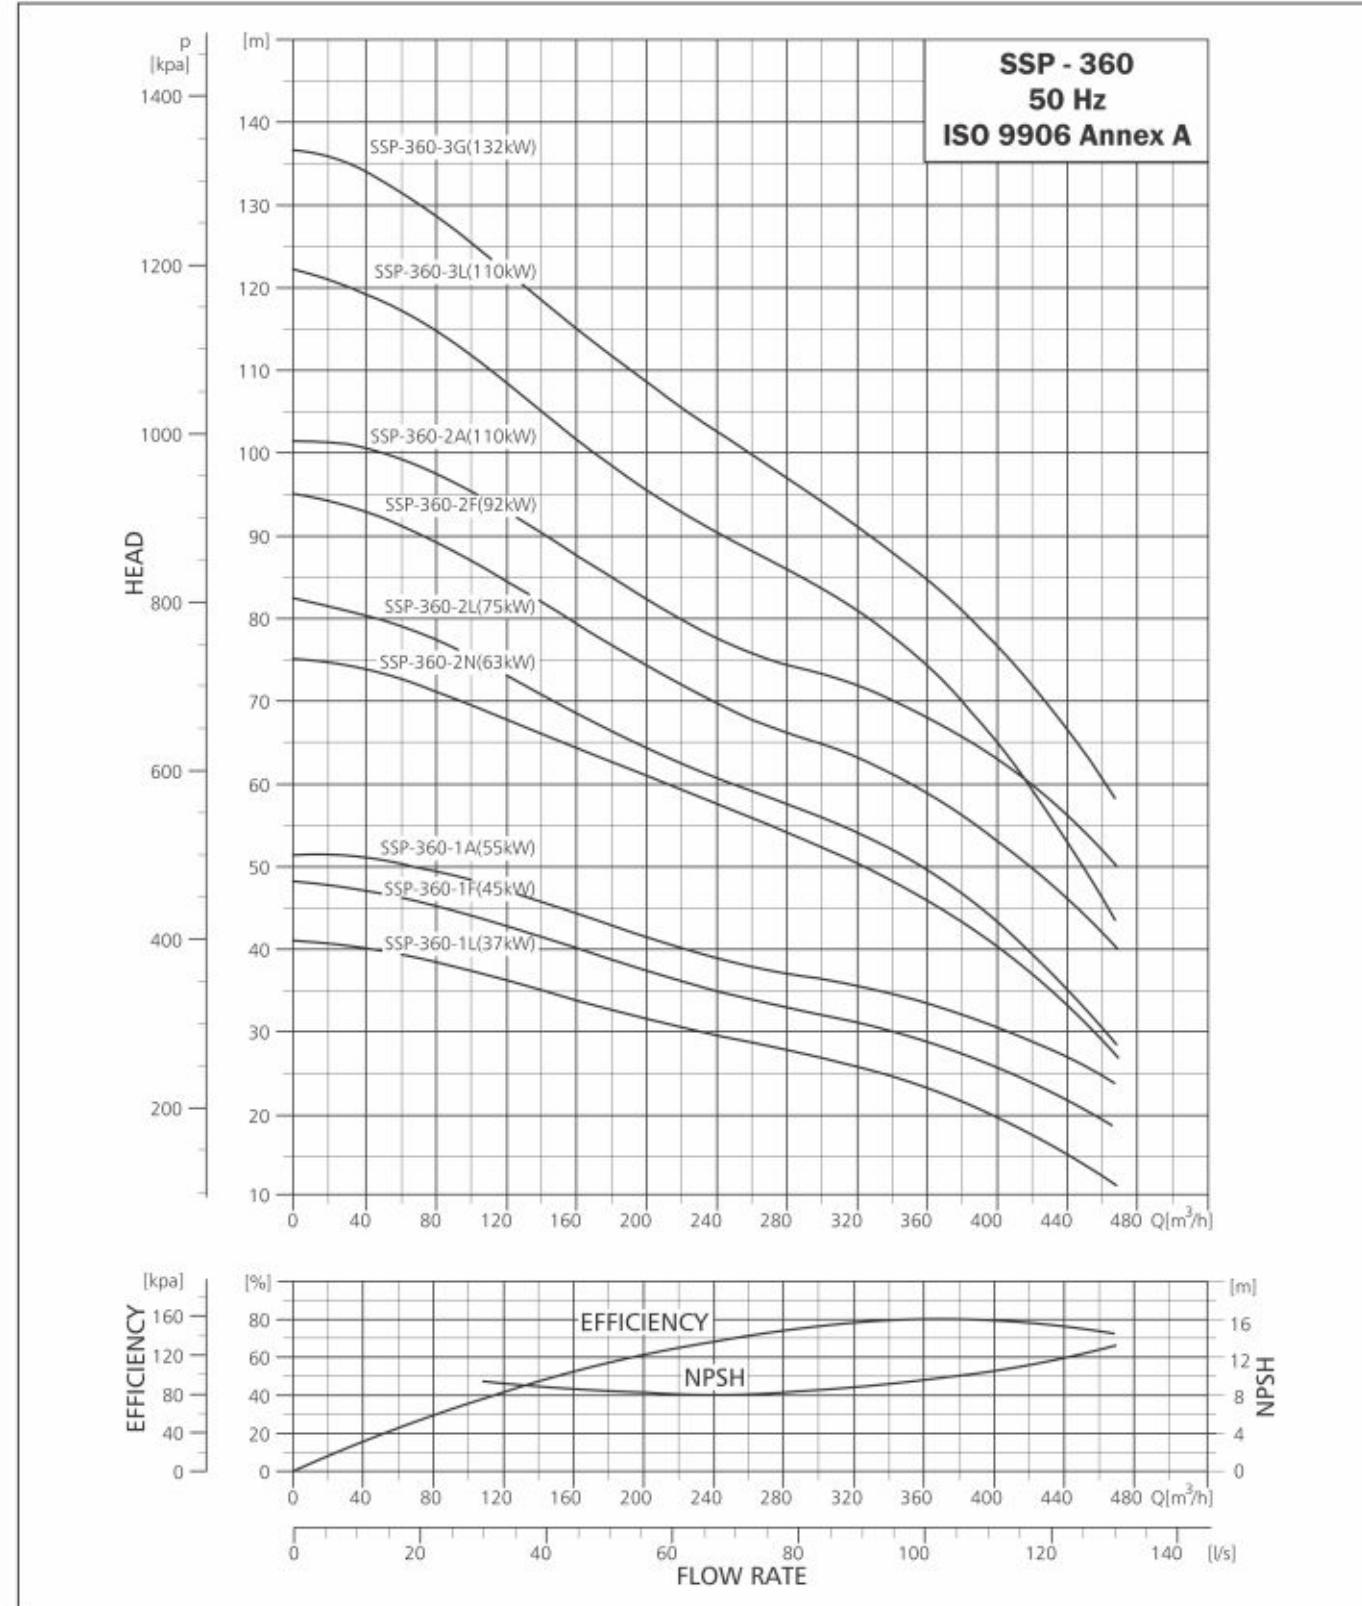

PERFORMANCE CURVE


SUBMERSIBLE PUMP SSP-360

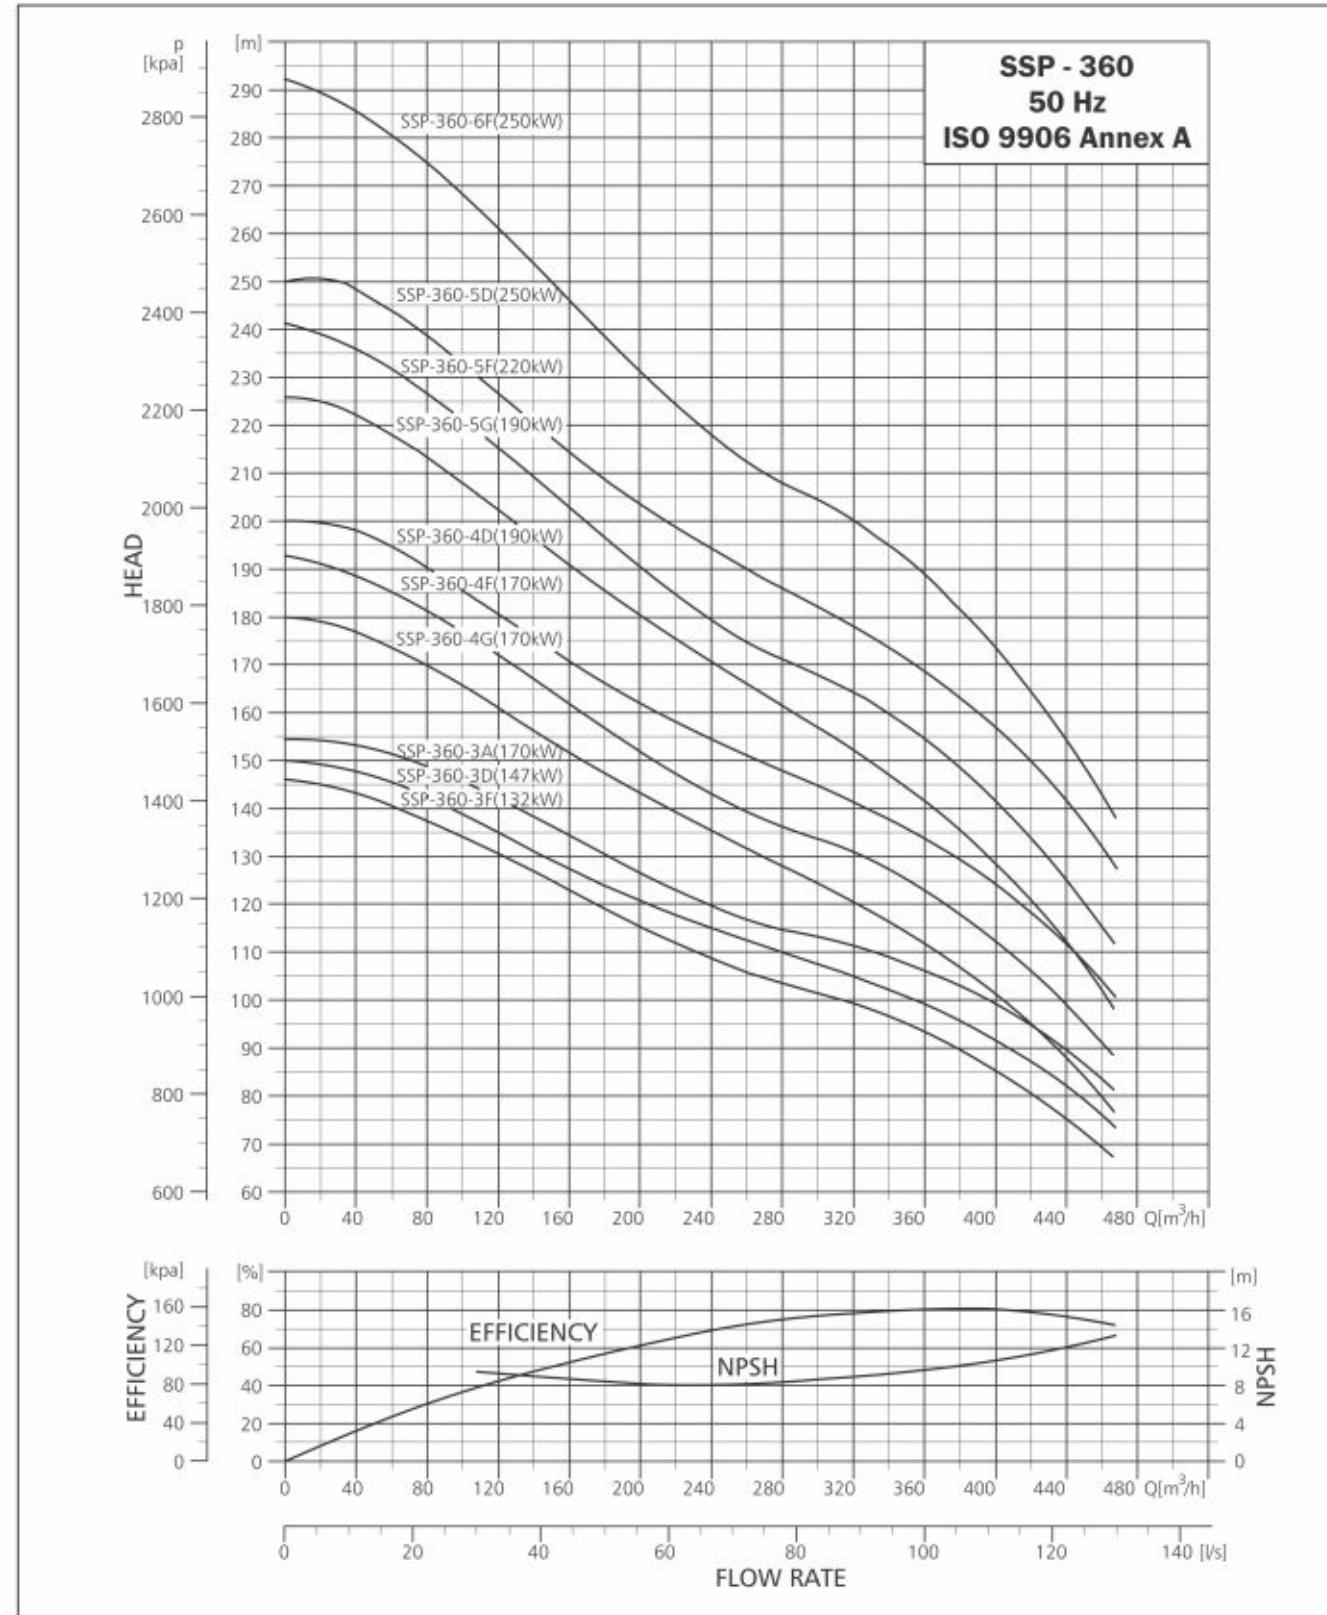

TECHNICAL DATA

SUBMERSIBLE PUMP SSP-360

DIMENSIONS AND WEIGHTS

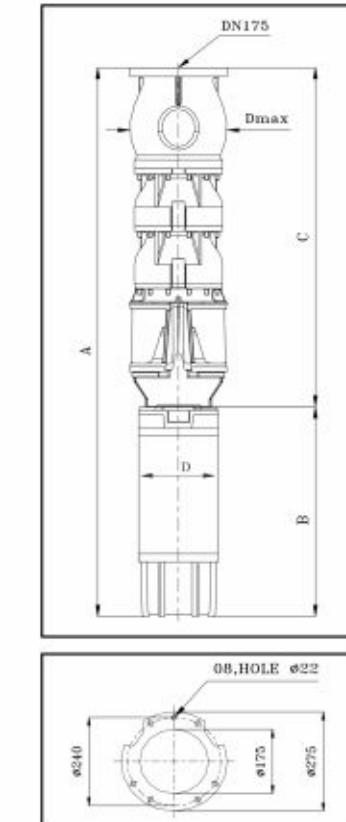

TECHNICAL DATA SSP-360

PUMP TYPE	MOTOR		DIMENSIONS (MM)				NET WEIGHT (KG)
	TYPE	POWER (kW)	C	B	A	D	
SSP360-1L	MATSF8"	37	885	1140	2025	192	296
SSP360-1F	MATSF8"	45	885	1230	2115	192	317
SSP360-1A	MATSF8"	55	885	1340	2225	192	332
SSP360-2N	MATSF8"	63	1065	1470	2535	192	383
SSP360-2L	MATSF8"	75	1065	1560	2625	192	402
SSP360-2F	MATSF8"	92	1065	1740	2805	192	448
SSP360-2A	MATSF8"	110	1065	1529	2594	192	498
SSP360-3L	MATSF8"	110	1245	1529	2774	192	523
SSP360-2A	MATSF10"	110	1065	1499	2564	237	555
SSP360-3L	MATSF10"	110	1245	1499	2744	237	580
SSP360-3G	MATSF10"	132	1245	1659	2904	237	630
SSP360-3F	MATSF10"	132	1245	1659	2904	237	630
SSP360-3D	MATSF10"	147	1245	1769	3014	237	695
SSP360-3A	MATSF12"	147	1245	1919	3164	286	805
SSP360-4G	MATSF12"	170	1425	1919	3344	286	840
SSP360-4F	MATSF12"	170	1425	1919	3344	286	840
SSP360-4D	MATSF12"	185	1425	1919	3344	286	885
SSP360-5G	MATSF12"	185	1605	1919	3524	286	910
SSP360-5F	MOTOR12"	220	1605	1893	3498	286	960
SSP360-5D	MOTOR12"	250	1605	1893	3498	286	1035
SSP360-6F	MOTOR12"	250	1785	1893	3678	286	106

PERFORMANCE TABLE SSP 360

MODEL	SSP 360				DISCHARGE (Q)										TOTAL HEAD IN (m)				
	6" joining	8" joining	10" joining	12" joining	MATERIAL		MOTOR RATING	TOTAL HEAD IN (m)											
					[kW]	[HP]		m ³ /h	0	40	80	120	160	200	240	280	320	360	400
SSP360-1L	9000010998	-	-	-	37	50	41	40	38	36	34	31	29	28	26	23	20	15	
SSP360-1F	-	9000010999	-	-	45	60	47	47	45	42	40	37	35	33	31	28	26	21	
SSP360-1A	-	9000011000	-	-	55	75	51	51	48	47	44	41	38	37	36	33	31	26	
SSP360-2N	-	9000011001	-	-	63	85	75	73	72	67	64	59	57	54	50	46	40	34	
SSP360-2L	-	9000011002	-	-	75	100	82	81	76	73	69	61	61	57	54	49	43	35	
SSP360-2F	-	9000011003	-	-	92	125	95	93	89	84	79	74	70	67	63	59	54	47	
SSP360-2A	-	-	9000011004	-	110	150	102	101	97	93	88	83	78	74	72	68	64	57	
SSP360-3L	-	-	9000011005	-	110	150	123	119	115	109	103	96	91	86	82	75	66	53	
SSP360-3G	-	-	9000011006	-	132	177	137	134	128	122	115	108	103	97	92	85	76	67	
SSP360-3F	-	-	9000011007	-	132	177	146	143	138	133	123	114	109	103	99	94	85	75	
SSP360-3D	-	-	9000011008	-	147	197	150	148	143	135	127	121	115	110	105	99	92	82	
SSP360-3A	-	-	9000011009	-	170	197	155	154	149	143	135	127	120	115	112	106	99	90	
SSP360-4G	-	-	9000011010	-	170	230	180	176	170	161	152	143	135	128	120	112	101	88	
SSP360-4F	-	-	9000011011	-	170	230	193	188	182	172	162	152	143	136	131	123	112	99	
SSP360-4D	-	-	9000011012	-	185	252	200	198	190	180	171	162	154	147	141	134	124	112	
SSP360-5G	-	-	9000011013	-	190	252	226	222	212	202	191	180	170	161	152	141	128	111	
SSP360-5F	-	-	9000011014	220	295	243	236	220	215	203	190	180	171	164	158	141	125		
SSP360-5D	-	-	9000011015	250	335	250	248	239	226	214	204	195	186	178	168	156	141		
SSP360-6F	-	-	9000011016	250	335	292	286	275	260	246	231	218	208	200	189	174	154		


This Performance Table is Approximate as a Performance Curve
Technical Change without notice

PERFORMANCE CURVE

SUBMERSIBLE MOTORS



SUBMERSIBLE PUMP SSP-360

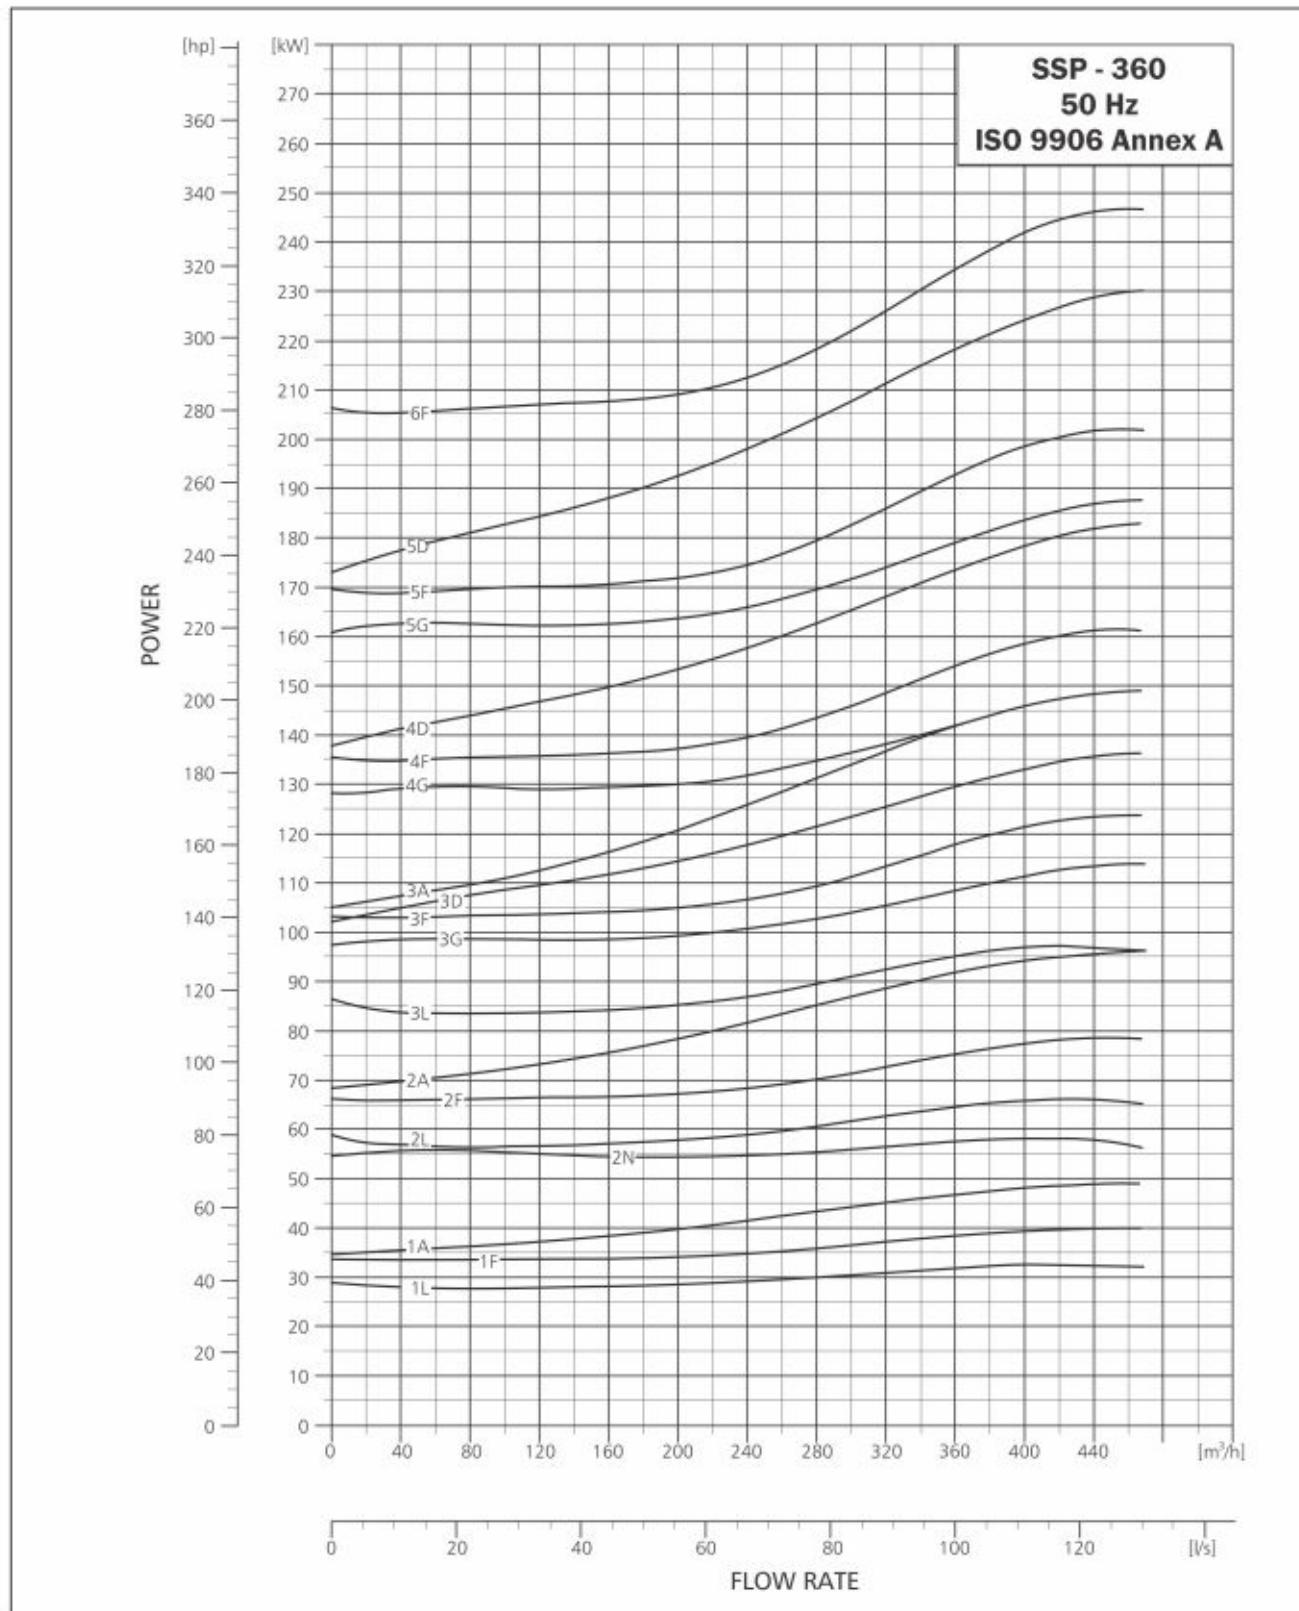

SINGLE PHASE PERFORMANCE DATA 50 Hz

SINGLE PHASE PERFORMANCE DATA 50 Hz 4" PREMIUM 100															
P_n [HP]	P_n [kW]	Thrust F [N]	U_n [V]	N_n [min⁻¹]	S.F.	I_n [A]	MAXIMUM [S.F LOAD AMP]	I_A [A]	$\eta(\text{Eff.})\% \text{ at } \% \text{ load}$			$\cos \phi (\text{PF.}) \text{ at } \% \text{ load}$			
									50	75	100	50	75	100	
0.5	0.37	1500	230	2890	1.6	B4.2	B5.2	14.4	51	59	62	0.52	0.6	0.62	
						R3.9	R4.9		Y1.72	Y1.72					
						B4.4	B5.8		23.1	52	59	63	0.48	0.59	0.86
0.75	0.55	1500	230	2900	1.5	R3.7	R5	23.1	Y2.15	Y2.15					
						B6.9	B8.3		Y3.4	Y3.4					
						R6.4	R7.5		Y3.9	Y3.9					
1	0.75	1500	230	2890	1.4	B8.2	B10	28.3	56	62	64	0.54	0.66	0.73	4.1
						R7.4	R9.2		Y3.9	Y3.9					
						B10.6	B12.5		39.6	58	65	68	0.59	0.71	0.85
1.5	1.1	3000	230	2890	1.3	R6.9	R8.8	53.4	60	66	68	0.71	0.81	0.9	8.3
						Y6.0	Y6.0								4.9

*PERFORMANCE IS TYPICALLY GUARANTEED

SINGLE PHASE PERFORMANCE DATA 50 Hz 4" PREMIUM 101															
P_n [HP]	P_n [kW]	Thrust F [N]	U_n [V]	N_n [min⁻¹]	S.F.	I_n [A]	MAXIMUM [S.F LOAD AMP]	I_A [A]	$\eta(\text{Eff.})\% \text{ at } \% \text{ load}$			$\cos \phi (\text{PF.}) \text{ at } \% \text{ load}$			
									50	75	100	50	75	100	
3	2.2	4000	230	2885	1.15	B14	B15.2	80.0	61	68	70	0.72	0.82	0.97	
						R9.7	R10.9		Y6.5	Y6.5					
						B19	B20.0		88.0	61	68	72	0.69	0.7	0.95
4	3	6500	230	2830	1.15	R15.2	R16.8	88.0	61	68	72	0.69	0.7	0.95	
						Y6.8	Y6.8		B22.2	B26.5					
						R18	R22.1		121	69	75	76	0.9	0.93	0.95
5	3.7	6500	230	2885	1.15	Y7.2	Y7.2								

*PERFORMANCE IS TYPICALLY GUARANTEED

THREE PHASE PERFORMANCE DATA 50 HZ

THREE PHASE PERFORMANCE DATA 50 Hz 4" PREMIUM 100																		
P _n	P _r	Thrust	U _n	N _n	S.F.	I _n	MAXIMUM	I _A	η(Eff.)[%]			COS φ (PF.)		T _n	T _A			
									[A]	[S.F LOAD AMP]	[A]	50	75	100	50	75	100	[Nm]
0.5	0.37	1500	380	2840	1.6	1.9	1.3	4.4	59	64	66	0.57	0.69	0.76	1.2	2.3		
			400	2865	1.6	1.9	1.3	4.7	56	63	66	0.53	0.65	0.7	1.2	2.5		
			415	2875	1.6	1.1	1.4	4.9	54	62	66	0.49	0.6	0.76	1.2	2.8		
0.75	0.55	1500	380	2830	1.5	1.6	1.9	6.0	61	67	67	0.59	0.72	0.8	1.9	3.1		
			400	2855	1.5	1.6	1.9	6.4	58	64	67	0.54	0.67	0.75	1.9	3.5		
			415	2870	1.5	1.7	2.0	6.6	55	63	66	0.5	0.63	0.8	1.9	3.7		
1	0.75	1500	380	2850	1.4	2.1	2.5	8.9	63	68	70	0.57	0.7	0.79	2.5	4.8		
			400	2870	1.4	2.1	2.5	9.3	60	67	69	0.52	0.65	0.75	2.5	5.3		
			415	2880	1.4	2.2	2.6	9.8	57	65	68	0.49	0.61	0.71	2.5	5.9		
1.5	1.1	3000	380	2820	1.3	3	3.6	13.8	69	72	72	0.59	0.73	0.81	3.8	9.6		
			400	2840	1.3	3	3.6	14.5	66	71	73	0.53	0.67	0.76	3.7	10.6		
			415	2860	1.3	3.1	3.7	15.3	64	70	72	0.49	0.62	0.72	3.7	11.5		
2	1.5	3000	380	2840	1.25	3.9	4.6	18.6	69	72	73	0.59	0.72	0.81	5.0	11.3		
			400	2855	1.25	4	4.7	19.2	66	71	73	0.53	0.66	0.76	5.0	12.6		
			415	2870	1.25	4.1	4.8	20.2	63	69	72	0.48	0.61	0.72	4.9	13.5		

*PERFORMANCE IS TYPICALLY GUARANTEED

THREE PHASE PERFORMANCE DATA 50 Hz 4" PREMIUM 101																		
P _n	P _r	Thrust	U _n	N _n	S.F.	I _n	MAXIMUM	I _A	η(Eff.)[%]			COS φ (PF.)		T _n	T _A			
									[A]	[S.F LOAD AMP]	[A]	50	75	100	50	75	100	[Nm]
3	2.2	4000	380	2815	1.15	5.8	6.4	28.7	72	75	75	0.58	0.72	0.81	7.6	21.7		
			400	2840	1.15	5.8	6.4	28.9	69	73	75	0.51	0.64	0.75	7.5	23.6		
			415	2870	1.15	6.3	6.9	30.8	66	71	73	0.45	0.59	0.69	7.5	25.9		
4	3	4000	380	2830	1.15	7.5	8.2	39.9	73	76	76	0.58	0.72	0.81	10	27.6		
			400	2850	1.15	7.8	8.6	41.6	70	74	76	0.51	0.65	0.75	9.9	31.5		
			415	2860	1.15	8.2	9.0	43.3	67	73	75	0.46	0.59	0.7	9.9	33.8		
5	3.7	6500	380	2830	1.15	9	9.9	46	75	78	77	0.64	0.76	0.84	34.9	12.5		
			400	2850	1.15	9.1	10.0	49	73	77	77	0.55	0.7	0.79	38.8	12.4		
			415	2860	1.15	9.4	10.3	50	71	76	76	0.51	0.64	0.74	41.6	12.4		
6	4.5	6500	380	2835	1.15	9.8	10.8	55	75	78	77	0.63	0.76	0.84	41.6	13.8		
			400	2855	1.15	10	11.0	58	73	77	78	0.56	0.69	0.78	46.1	13.7		
			415	2870	1.15	10	11.0	60	71	76	77	0.5	0.63	0.73	49.5	13.6		
7.5	5.5	6500	380	2830	1.15	13.5	14.3	72	73	76	76	0.64	0.76	0.81	46.7	18.8		
			400	2850	1.15	13.7	14.3	76	71	75	76	0.57	0.7	0.76	51.8	18.7		
			415	2860	1.15	14.2	15.4	79	69	74	75	0.52	0.65	0.71	55.7	18.6		
10	7.5	6500	380	2800	1.15	18.3	20.1	96	70	74	77	0.53	0.65	0.84	81.2	25.2		
			400	2820	1.15	18.4	19.8	97	70	73	74	0.47	0.57	0.79	89.9	25.1		
			415	2820	1.15	17.4	18.7	102	74	77	77	0.56	0.7	0.77	81.2	25.2		

*PERFORMANCE IS T

MTSF 8" REWINDABLE MOTORS PERFORMANCE DATA 50 HZ

MTSF 8" REWINDABLE MOTORS PERFORMANCE DATA 50 Hz																
P _n [HP]	P _n [kW]	Thrust F [N]	U _n [V]	N _n [min 1]	I _n [A]	I _A [A]	η(Eff.)[%]			COS φ (PF.)			T _n [Nm]	T _A [Nm]		
							at % load			at % load						
							50	75	100	50	75	100				
40	30	45000	380	2880	63	300	83.5	84.4	83.1	0.81	0.85	0.87	99	126		
			400	2900	60	318	83.6	85.0	84.3	0.77	0.84	0.86	99	141		
			415	2910	58	332	83.5	85.2	84.9	0.75	0.82	0.85	98	151		
50	37	45000	380	2890	79	378	84.6	85.3	83.9	0.77	0.83	0.85	122	156		
			400	2900	76	400	83.9	85.2	83.2	0.73	0.81	0.85	122	176		
			415	2910	75	412	82.6	84.5	84.3	0.68	0.77	0.81	121	190		
60	45	45000	380	2900	93	491	85.8	86.4	85.2	0.77	0.85	0.87	149	218		
			400	2910	90	520	85.3	86.5	85.9	0.73	0.81	0.85	148	241		
			415	2910	89	541	84.5	86.2	85.8	0.67	0.77	0.82	148	263		
70	52	45000	380	2900	107	575	86.5	86.7	85.3	0.77	0.83	0.85	175	284		
			400	2910	103	608	86.4	87.1	86.2	0.73	0.81	0.84	175	318		
			415	2920	101	633	85.6	87.0	86.7	0.69	0.78	0.83	174	345		
75	55	45000	380	2900	114	624	86.5	86.9	85.7	0.75	0.83	0.85	182	301		
			400	2915	110	660	85.9	87.0	86.4	0.69	0.79	0.83	181	340		
			415	2920	109	688	84.8	86.4	86.2	0.75	0.75	0.81	181	366		
80	60	45000	380	2900	122	698	87.2	87.6	86.5	0.86	0.92	0.94	198	319		
			400	2910	116	725	86.8	87.7	87.0	0.75	0.82	0.86	197	357		
			415	2920	115	768	86.1	87.4	87.1	0.70	0.79	0.83	197	387		
85	67	45000	380	2900	137	759	87.2	87.6	86.4	0.76	0.83	0.86	220	352		
			400	2910	133	797	86.5	87.5	86.9	0.71	0.79	0.83	220	395		
			415	2920	131	828	85.6	87.0	86.6	0.67	0.77	0.82	219	427		
100	75	45000	380	2900	154	892	86.7	87.1	85.9	0.76	0.80	0.86	247	419		
			400	2910	148	942	86.2	87.3	86.7	0.71	0.80	0.84	246	472		
			415	2920	147	982	85.4	86.9	86.6	0.67	0.77	0.82	245	510		
110	83	45000	380	2910	166	1019	87.8	88.3	87.2	0.78	0.84	0.87	275	483		
			400	2920	160	1077	87.5	88.4	87.6	0.74	0.81	0.85	273	544		
			415	2925	156	1120	87.2	88.4	88.0	0.71	0.80	0.84	273	586		
125	93	45000	380	2910	188	1186	87.8	88.4	87.5	0.75	0.83	0.86	306	557		
			400	2920	183	1276	87.2	88.3	87.8	0.68	0.78	0.83	305	626		
			415	2930	184	1308	86.2	87.8	87.7	0.62	0.73	0.80	305	676		

*PERFORMANCE IS TYPICALLY GUARANTEED

SUBMERSIBLE MOTORS

SML 6" REWINDABLE MOTORS PERFORMANCE DATA 50 HZ

SML 6" REWINDABLE MOTORS PERFORMANCE DATA 50 Hz																
P _n [HP]	P _n [kW]	Thrust F [N]	U _n [V]	N _n [min 1]	I _n [A]	I _A [A]	η(Eff.)[%]			COS φ (PF.)			T _n [Nm]	T _A [Nm]		
							at % load			at % load						
							50	75	100	50	75	100				
5.5	4.0	15500	380	2860	11.7	49	0.62	0.69	0.71	0.53	0.63	0.72	13.3	22.0		
			400	2880	12.2	52	0.59	0.66	0.70	0.48	0.58	0.67	13.2	24.4		
			415	2890	12.0	54	0.56	0.64	0.68	0.45	0.59	0.68	13.1	26.3		
7.5	5.5	15500	380	2860	14.9	62	0.69	0.74	0.75	0.53	0.64	0.74	18.3	27.5		
			400	2870	15.8	65	0.64	0.70	0.73	0.42	0.58	0.68	18.2	30.6		
			415	2890	14.5	67	0.63	0.70	0.73	0.42	0.62	0.63	18.2	33.0</		

TABLE OF HEAD LOSSES

MTSF 10" REWINDABLE MOTORS PERFORMANCE DATA 50 HZ

MTSF 10" REWINDABLE MOTORS PERFORMANCE DATA 50 Hz														
P _n [HP]	P _n [kW]	Thrust F [N]	U _n [V]	N _n [min⁻¹]	I _n [A]	I _A [A]	η(Eff.)[%]			COS φ (PF.)			T _n [Nm]	T _A [Nm]
							at % load			at % load				
116	85	60000	380	2890	179	783	0.85	0.86	0.85	0.78	0.85	0.87	281	282
			400	2900	174	828	0.83	0.85	0.85	0.72	0.81	0.85	280	316
			415	2910	171	863	0.83	0.85	0.85	0.68	0.78	0.83	279	342
150	110	60000	380	2910	235	1095	0.86	0.87	0.86	0.72	0.81	0.85	361	418
			400	2920	232	1158	0.84	0.86	0.86	0.65	0.76	0.82	360	467
			415	2920	233	1206	0.83	0.85	0.86	0.59	0.71	0.79	360	507
177	130	60000	380	2900	266	1271	0.88	0.88	0.87	0.79	0.85	0.87	428	487
			400	2920	256	1344	0.87	0.88	0.88	0.74	0.82	0.86	425	546
			415	2920	255	1400	0.87	0.88	0.87	0.69	0.78	0.83	425	592
204	150	60000	380	2910	307	1502	0.87	0.87	0.86	0.79	0.85	0.88	492	568
			400	2920	298	1590	0.86	0.88	0.87	0.73	0.81	0.85	491	635
			415	2930	296	1655	0.86	0.87	0.87	0.67	0.77	0.83	489	689
252	185	60000	380	2900	390	2030	0.87	0.88	0.87	0.72	0.81	0.85	609	913
			400	2920	384	2148	0.86	0.88	0.88	0.64	0.75	0.81	605	1022
			415	2920	389	2237	0.84	0.86	0.86	0.57	0.70	0.79	605	1109

*PERFORMANCE IS TYPICALLY GUARANTEED

CONNECTING PIECES

The tables below show the range of connecting pieces for connection of thread-to-flange and thread-to-thread.

Thread-to-flange (standard flange to EN 1092-1)				Thread-to-thread				Dimensions [mm]					
Type	Pump outlet	Connecting piece	A	Dimensions [mm]					v1	v2	n		
			B	C	D	E	F	L					
QF-30	Rp 2 ½	R 2 ½ → DN 50 PN 16/40	R 2 ½	125	65	40	Ø19	Ø165	170	60	90	4	
		R 2 ½ → DN 65 PN 16/40	R 2 ½	145	71	30	Ø19	Ø185	170	22.5	45	8	
		R 2 ½ → DN 80 PN 16/40	R 2 ½	160	82.5	40	Ø19	Ø200	170	22.5	45	8	
QF-50	Rp 3	R 3 → DN 65 PN 16/40	R 3	145	71	30	Ø19	Ø185	170	22.5	45	8	
		R 3 → DN 80 PN 16/40	R 3	160	82.5	40	Ø19	Ø200	170	22.5	45	8	
		R 3 → DN 100 PN 16/40	R 3	180/190	100	40	Ø19/Ø23	Ø235	170	22.5	45	8	
QF-75 QF-100	Rp 4	R 3 → DN 65 PN 16/40	R 3	145	71	30	Ø19	Ø185	170	22.5	45	8	
		R 3 → DN 80 PN 16/40	R 3	160	82.5	40	Ø19	Ø200	170	22.5	45	8	
		R 3 → DN 100 PN 16/40	R 3	180/190	100	40	Ø19/Ø23	Ø235	170	22.5	45	8	
		R 4 → DN 100 PN 16/40	R 4	180/190	100	40	Ø19/Ø23	Ø235	180	22.5	45	8	
QF-125 QF-160	Rp 5	R 5 → DN 100 PN 16/40	R 5	180/190	82	35	Ø19/Ø23	Ø235	195	22.5	45	8	
		R 5 → DN 125 PN 16/40	R 5	210/220	99	37	Ø19/Ø28	Ø270	195	22.5	45	8	
		R 5 → DN 150 PN 16/40	R 5	240/250	115	36	Ø23/Ø28	Ø300	195	22.5	45	8	
QF-210 QF-270 QF-360	Rp 6	R 6 → DN 125 PN 16/40	R 6	210/220	99	36	Ø19/Ø28	Ø270	195	22.5	45	8	
		R 6 → DN 150 PN 16/40	R 6	240/250	114	36	Ø23/Ø28	Ø300	195	22.5	45	8	
		R 6 → DN 200 PN 16	R 6	295	134	36	Ø23	Ø340	195	15	30	12	
		R 6 → DN 200 PN 40	R 6	320	151	36	Ø31	Ø375	200	15	30	12	
Type				Dimensions					L [mm]				
		Pump outlet		Connecting piece		A		B	L [mm]				
QF-125 QF-160	Rp 5	R 5 → R 4		Rp 5		Rp 4		121					
		R 5 → R 6		Rp 5		Rp 6		150					
		5" NPT → 4" NPT		5" NPT		4" NPT		121					
		5" NPT → 6" NPT		5" NPT		6" NPT		150					
QF-210 QF-270 QF-360	Rp 6	R 6 → R 5		Rp 6		Rp 5		150					
		6" NPT → 5" NPT		6" NPT		5" NPT		150					

TABLE OF HEAD LOSSES

HEAD LOSSES IN ORDINARY WATER PIPES

MISCELLANEOUS

UPPER FIGURES INDICATE THE VELOCITY OF WATER IN M/SEC.

LOWER FIGURES INDICATE HEAD LOSS IN METERS PER 100 METERS OF STRAIGHT PIPES.

m³/h	Litres/min.	Litres/sec.	HEAD LOSSES IN ORDINARY WATER PIPES											
			NOMINAL PIPE DIAMETER IN INCHES AND INTERNAL DIAMETER IN MM											
1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	3 1/2"	4"	5"	6"			
15.75	21.25	27	35.75	41.25	52.5	68	80.25	92.5	105	130	155.5			
0.6	10	0.16	0.855 9.910	0.470 2.407	0.292 0.784									
0.9	15	0.25	1.282 20.11	0.705 4.862	0.438 1.570	0.249 0.416								
1.2	20	0.33	1.710 33.53	0.940 8.035	0.584 2.588	0.331 0.677	0.249 0.346							
1.5	25	0.42	2.138 49.93	1.174 11.91	0.730 3.834	0.415 1.004	0.312 0.510							
1.8	30	0.5	2.565 69.34	1.409 16.50	0.876 5.277	0.498 1.379	0.374 0.700	0.231 0.223						
2.1	35	0.58	2.993 91.54	1.644 21.75	1.022 6.949	0.581 1.811	0.436 0.914	0.269 0.291						
2.4	40	0.67		1.879 27.66	1.168 8.820	0.664 2.290	0.499 1.160	0.308 0.368						
3	50	0.83		2.349 41.40	1.460 13.14	0.830 3.403	0.623 1.719	0.385 0.544	0.229 0.159					
3.6	60	1		2.819 57.74	1.751 18.28	0.996 4.718	0.748 2.375	0.462 0.751	0.275 0.218					
4.2	70	1.12		3.288 76.49	2.043 24.18	1.162 6.231	0.873 3.132	0.539 0.988	0.321 0.287	0.231 0.131				
4.8	80	1.33		2.335 30.87	1.328 7.940	0.997 3.988	0.616 1.254	0.367 0.363	0.263 0.164					
5.4	90	1.5		2.627 38.30	1.494 9.828	1.122 4.927	0.693 0.449	0.413 0.203	0.269 0.203					
6	100	1.67		2.919 46.49	1.660 11.90	1.247 5.972	0.770 1.875	0.459 0.542	0.329 0.244	0.248 0.124				
7.5	125	2.08		3.649 70.41	2.075 17.93	1.558 8.967	0.962 2.802	0.574 0.809	0.412 0.365	0.310 0.185	0.241 0.101			
9	150	2.5		2.490 25.11	1.870 12.53	1.154 3.903	0.668 1.124	0.494 0.506	0.372 0.256	0.289 0.140				
10.5	175	2.92		2.904 33.32	2.182 16.66	1.347 5.179	0.803 1.488	0.576 0.670	0.434 0.338	0.337 0.184				
12	200	3.33		3.319 42.75	2.493 21.36	1.539 6.624	0.918 1.901	0.659 0.855	0.496 0.431	0.385 0.234	0.251 0.084			
15	250	4.17		4.149 64.86	3.117 32.32	1.924 10.03	1.147 2.860	0.823 1.282	0.620 0.646	0.481 0.350	0.314 0.126			
18	300	5			3.740 45.52	2.309 14.04	1.377 4.009	0.988 1.792	0.744 0.903	0.577 0.488	0.377 0.175	0.263 0.074		
24	400	6.67			4.987 78.17	3.078 24.04	1.836 6.828	1.317 3.053	0.992 1.530	0.770 0.829	0.502 0.294	0.351 0.124		
30	500	8.33				3.848	2.295	1.647	1.240	0.962	0.628	0.439		
36	600	10				4.618 51.84	1.976 14.62	1.488 6.505	1.155 3.261	0.753 1.757	0.526 0.623	0.326 0.260		
42	700	11.7				3.212 19.52	2.306 8.693	1.736 4.356	1.347 2.345	0.879 0.831	0.614 0.347	0.445 0.347		
48	800	13.3				3.671 25.20	2.635 11.18	1.984 5.582	1.540 3.009	1.005 1.066	0.702 0.445	0.445 0.187		
54	900	15				4.130 31.51	2.964 13.97	2.232 6.983	1.732 3.762	1.130 1.328	0.790 0.555	0.555 0.328		
60	1000	16.7				4.589 38.43	3.294 17.06	2.480 8.521	1.925 4.595	1.256 1.616	0.877 0.674	0.445 0.264		
75	1250	20.8				4.117 26.10	3.100 13.00	2.406 7.010	1.570 2.458	1.097 1.027				
90	1500	25				4.941 36.97	3.720 18.42	2.887 9.892	1.883 3.468	1.316 1.444				
105	1750	29.2					4.340 24.76	3.368 13.30	2.197 4.665	1.535 1.934				
120	2000	33.3					4.960 31.94	3.850 17.16	2.511 5.995	1.754 2.496				
150	2500	41.7					4.812 26.26	3.139 9.216		2.193 3.807				
180	3000	50						3.767 13.05		2.632 5.417				
240	4000	66.7						5.023 22.72		3.509 8.926				
300	5000	83.3							4.386 14.42					
90° bends, slide valves			1.0	1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	2.0	2.5	
T-pieces, non-return valves			4.0	4.0	4.0	5.0	5.0	5.0	6.0	6.0	7.0	8.0	9.0	

The table is calculated in accordance with H. Lang's new formula $a = 0.02$ and for a water temperature of 10°C.

The head loss in bends, slide valves, T-piece sand non-return valves is equivalent to the meters of straight pipes stated in the last two lines of the table.

To find the head loss in foot valves, multiply the loss in T-pieces by two.

TABLE OF HEAD LOSSES



HEAD LOSSES IN PLASTIC PIPES

MISCELLANEOUS

FIGURES INDICATE HEAD LOSS IN METERS PER 100 METERS OF STRAIGHT PIPES.

m³/hr	Ltr./min.	Litres/sec.	QUANTITY OF WATER		HEAD LOSSES IN WATER PIPES											
			PELM		PELM/PEH PN 10											

CABLE SIZING



CABLE SIZING

SUBMERSIBLE PUMPS SP A, SP

Cable dimensions at 3 X 400 V, 50 Hz

Voltage drop: 3%

MOTOR	KW	In [A]	Cos φ 100%	DIMENSIONS [mm ²]															
				1.5	2.5	4	6	10	16	25	35	50	70	95	120	150	185	240	300
4"	0.37	1.4	0.64	576	955														
4"	0.55	2.2	0.64	366	608	966													
4"	0.75	2.3	0.72	312	518	824													
4"	1.1	3.4	0.72	211	350	558	830												
4"	1.5	4.2	0.75	164	273	434	646												
4"	2.2	5.5	0.82	115	191	304	453	748											
4"	3	7.85	0.77	86	142	226	337	555	872										
4"	4	9.6	0.8	67	112	178	266	438	689										
4"	5.5	13	0.81	49	82	130	194	320	504	768									
4"	7.5	18.8	0.78	49	59	93	139	229	360	548	745								
6"	5.5	13.6	0.77	37	82	131	195	320	503	765									
6"	7.5	17.6	0.8		61	97	145	239	376	573	781								
6"	9.2	21.8	0.81		49	78	116	191	300	458	625	860							
6"	11	24.8	0.83		42	67	99	164	258	395	540	744	995						
6"	13	30	0.81			56	84	139	218	333	454	625	833						
6"	15	34	0.82				73	121	191	291	397	547	731	938					
6"	18.5	42	0.81				60	99	156	238	324	446	595	763	913				
6"	22	48	0.84					84	132	202	276	382	511	659	792	935			
6"	26	57	0.84					71	111	170	233	321	431	555	667	788	913		
6"	30	66.5	0.83						96	147	201	277	371	477	573	676	782	925	
6"	37	85.5	0.79							119	162	223	296	378	451	529	608	713	806
8"	22	48	0.84					84	132	202	276	382	511	659	792	935			
8"	26	56.5	0.85					70	111	170	233	322	432	557	671	794	922		
8"	30	64	0.85						98	150	205	284	381	492	592	701	814	967	
8"	37	78.5	0.85						80	122	168	232	311	401	483	572	664	789	903
8"	45	96.5	0.82							10	140	193	257	330	396	466	539	635	723
8"	55	114	0.85								115	159	214	276	333	394	457	543	622
8"	63	132	0.83									140	187	240	289	340	394	466	531
8"	75	152	0.86									119	160	206	249	295	343	409	469
8"	92	186	0.86										130	169	203	241	281	334	383
8"	110	224	0.87											140	169	200	233	279	321
10"	75	156	0.84											157	203	244	288	334	395
10"	92	194	0.82											128	164	197	232	268	316
10"	110	228	0.84												139	167	197	228	271
10"	132	270	0.84													141	166	193	228
10"	147	315	0.81														143	165	194
10"	170	365	0.81															168	190
10"	190	425	0.79																143
12"	147	305	0.83														147	170	202
12"	170	345	0.85															151	179
12"	190	390	0.84																158
12"	220	445	0.85																159
12"	250	505	0.85																
MAX. CURRENT FOR CABLE [A]*				18.5	25	34	43	60	80	101	126	153	196	38	276	319	364	430	497

*At Particularly Favorable Heat Dissipation Conditions.

Maximum Cable Length in Meters from Motor Starter to Pump.

SUBMERSIBLE PUMPS SP A, SP

Cable dimensions at 3 X 400 V, 50 Hz

Voltage drop: 1%

*At Particularly Favorable Heat Dissipation Conditions.

Maximum Cable Length in Meters from Motor Starter to Pump